

SupremeRAID™ SE User Guide for Linux

Nov 2025



Copyright © 2021–2025 Graid Technology Inc. All Rights Reserved.

SupremeRAID™ is a registered trademark of Graid Technology Inc. All other trademarks and registered trademarks are the property of their respective owners.

Graid Technology reserves the right to make changes without further notice to any products or content herein to improve reliability, function, or design. Graid Technology makes no warranty as to the accuracy or completeness of the content or information provided herein, which are provided on an “as is” basis.

No license to Graid Technology's or any third party's intellectual property rights are conveyed hereunder.

Publication: Nov 24, 2025

Table of Contents

- Table of Contents.....3
- INTRODUCTION..... 5**
- SPECIFICATIONS & MODES..... 6**
 - RAID Components7
 - Physical Drive (PD) 8
 - Drive Group (DG)..... 8
 - Virtual Drive (VD)..... 8
 - Controller (CX)..... 9
 - Precautions9
- SIGN UP FOR A SUBSCRIPTION 10**
- INSTALLATION..... 11**
 - Prerequisites..... 11
 - BIOS Setting..... 11
 - Installing the Software Driver 12
 - Using the Pre-installer and Installer..... 12
 - Uninstalling the Software Driver..... 17
 - Managing Physical Drives..... 19
 - Creating a Physical Drive 19
 - Deleting a Physical Drive..... 20
 - Marking a Physical Drive Online/Offline/Good/Bad 20
 - Assigning a Hot Spare Drive..... 21
 - Managing Drive Groups 22
 - Creating a Drive Group..... 22
 - Deleting a Drive Group..... 23
 - Degradation and Recovery 24
 - Rescue Mode..... 24

- Managing Virtual Drives 25
 - Creating a Virtual Drive 25
 - Deleting a Virtual Drive 26
- Features Overview 27
 - Consistency Checks 27
 - Drive Copyback..... 27
 - Double Failure Protection with Distributed Journaling..... 28
 - Support for the Dataset Management (DSM) Deallocate command on virtual drives 29
- Attachments 30
 - Events for SupremeRAID™ SE..... 30
- FAQ 34

INTRODUCTION

SupremeRAID™ SE is the most powerful, high-speed data protection solution specially designed for NVMe SSDs. SupremeRAID™ SE installs a virtual NVMe controller onto the operating system and integrates a high-performance, AI processor-equipped PCIe RAID card into the system to manage the RAID operations of the virtual NVMe controller.

This document explains how to install the SupremeRAID™ SE software package for Linux and how to manage the RAID components using the Graphical Management Console.

SPECIFICATIONS & MODES

| SupremeRAID™ SE Driver Specifications | |
|--|---|
| Supported Models | SE-TU, SE-AM, SE-AD, SE-BW |
| Supported RAID levels | RAID 0, 1, 5, 10, |
| Supported OS | <ul style="list-style-type: none"> ● AlmaLinux 8.5-8.10 (Kernel 4.18), 9.0-9.6(Kernel 5.14), 10.0 (Kernel 6.12) ● CentOS 8.3, 8.4, 8.5 (Kernel 4.18) ● Debian 11.6 (Kernel 5.10), 12 (Kernel 6.1), 13 (Kernel 6.12) ● openSUSE Leap 15.2-15.3 (Kernel 5.3), 15.4-15.5 (Kernel 5.14), 15.6(Kernal 6.4) ● Oracle Linux 8.7-8.10 (RHCK 4.18 and UEK 5.15), 9.1-9.6 (RHCK 5.14 and UEK 5.15), 10.0 (RHCK 6.12 and UEK 6.12) ● Proxmox VE 8.1 (Kernel 6.5), 8.2-8.4 (Kernel 6.8), 9.0 (Kernel 6.14) ● RHEL 7.9 (Kernel 3.10 or 4.18), 8.3-8.10 (Kernel 4.18), 9.0-9.6 (Kernel 5.14), 10.0 (Kernel 6.12) ● Rocky Linux 8.5-8.10(Kernel 4.18), 9.0-9.6 (Kernel 5.14), 10.0 (Kernel 6.12) ● SLES 15 SP2-SP3(Kernel 5.3), 15 SP4-SP5 (Kernel 5.14) 15 SP6 (Kernel 6.4) ● Ubuntu 20.04.0-20.04.4 (Kernel 5.4 and 5.15), 22.04.0-22.04.2 (Kernel 5.15), 22.04.3-22.04.4 (Kernel 6.2), 24.04 (Kernel 6.8) |
| Supported GPU models | Turing, Ampere, Ada Lovelace, Blackwell series |
| Recommended minimum drive number for each RAID level | RAID 0: at least one drives RAID 1: at least two drives RAID 5: at least three drives RAID 10: at least two drives |
| Maximum number of physical drives | 8 |
| Maximum number of drive groups | 8 |
| Maximum number of virtual drives per drive group | 1023 |
| Maximum size of the drive group | Defined by the physical drive sizes |
| Configurable strip size (RAID0, RAID10) | 4k, 8k, 16k, 32k, 64k,128k |


SupremeRAID™ SE offers two different modes: Perpetual and Subscription.

- Perpetual: For licensing inquiries, please contact our [Sales Department](#).
- Subscription: Please refer to the [Sign up for a subscription](#) section.

RAID Components

There are four major RAID logical components in SupremeRAID™ SE:

- Physical Drive (PD)
- Drive Group (DG)
- Virtual Drive (VD)
- Controller (CX)

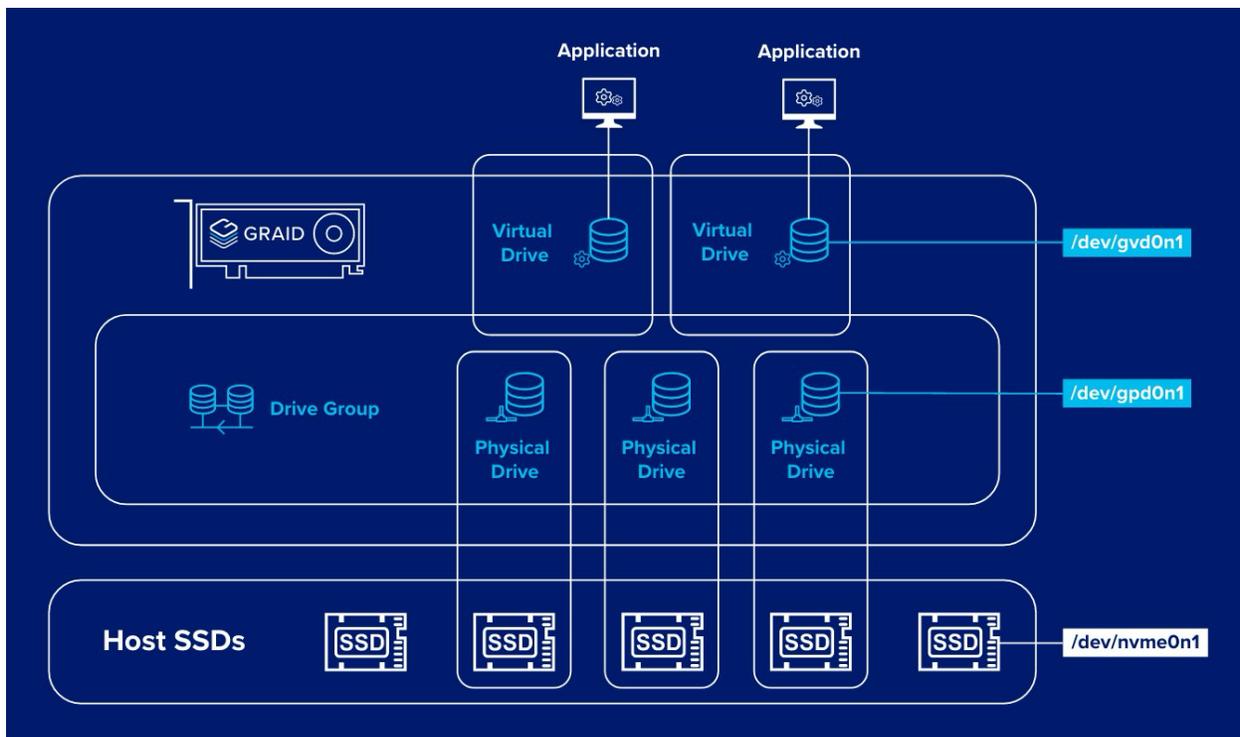

Physical Drive (PD)

Since NVMe drives are not directly attached to the SupremeRAID™ SE controller, you must tell the controller which SSDs can be managed. After an SSD is created as a physical drive, the SupremeRAID™ SE driver unbinds the SSD from the operating system, meaning the device node (`/dev/nvmeX`) disappears and is no longer accessible. At the same time, the SupremeRAID™ SE driver creates a corresponding device node (`/dev/gpdX`). You can check the SSD information, such as SSD model or SMART logs, using this device node. To control and access the SSD using `/dev/nvmeXn1`, you must first delete the corresponding physical drive.

SupremeRAID™ SE supports a maximum 8 physical drives in one Drive Group.

Drive Group (DG)

The main component of RAID logic is a RAID group. When the drive group is created, the SupremeRAID™ SE driver initializes the physical drives with the corresponding RAID mode to ensure that the data and parity are synchronized. There are two types of initialization processes.

- Fast Initialization: When all the physical drives in the drive group (DG) support the deallocate dataset management command, the SupremeRAID™ SE driver performs fast initialization by default, meaning the drive group state is optimized immediately.
- Background Initialization: Performance will be slightly affected by the initialization traffic, but you can still create the virtual drive and access the virtual drive during a background initialization.

SupremeRAID™ SE supports a maximum of 8 Drive Groups.

Virtual Drive (VD)

The virtual drive is equivalent to the RAID volume. You can create multiple virtual drives in the same drive group for multiple applications. The corresponding device node (`/dev/gdgXnY`) appears on the operating system when you create a virtual drive, and you can make the file system or run application directly on this device node

SupremeRAID™ SE supports a maximum of 1023 Virtual Drives in each Drive Group.

Controller (CX)


The controller is the core component of the RAID system. It provides detailed hardware information such as GPU serial number, temperature, and fan speed. RAID management relies on the controller, so the controller's state directly affects the underlying drive group operations.

Precautions


- System suspension and hibernation are currently unsupported due to a limitation in the NVIDIA driver.
- Remote Target for NVMe-oF are not supported by Linux driver.
- If you have previously installed other SupremeRAID™ products, executing the SupremeRAID™ SE installation will prevent the restoration of previous product settings.
- For SupremeRAID™ SE Subscription mode, please note that one email account is restricted to a single subscription, machine and GPU. Cross-device usage is not supported. After your subscription expires, you will still be able to access and read your data, but the data cannot be written to the drive.
- For more information, please refer to the [FAQ](#) section.

SIGN UP FOR A SUBSCRIPTION

Step 1 You can sign up for the SupremeRAID™ SE through our [official website](#). Please create an account on the SupremeRAID™ SE Portal.

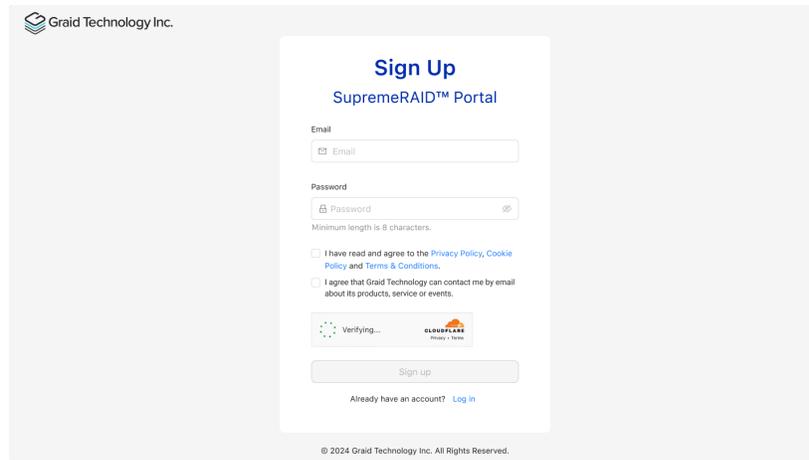

Step 2 Choose your preferred subscription plan, and you can start using the service after linking your credit card.

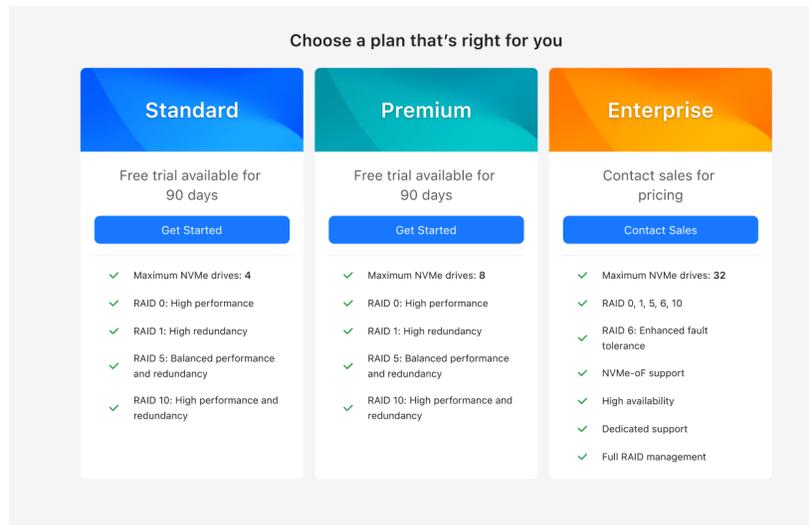

Step 3 Upon successful subscription, please follow the steps in the next section to proceed with the installation.

INSTALLATION

This section describes how to install the SupremeRAID™ SE software package for Linux operating systems.

Prerequisites

Before installing the software package, ensure that the system meets the following requirements:

- Minimum system requirements:
 - CPU: 2 GHz or faster with at least 8 cores
 - RAM: 16 GB
 - Supported operating system: See the [Supported Operating Systems](#) section on our website.
 - An available PCIe Gen3 or Gen4 x16 slot
- The GPU card must be installed into a PCIe x16 slot.
- The SupremeRAID™ SE software package, which includes the Pre-Installer and Installer, can be downloaded directly from the Graid Technology website. The Pre-Installer configures all necessary dependencies and environment settings automatically prior to installing the SupremeRAID™ SE driver. The Installer contains the SupremeRAID™ SE driver package and will automatically detect your Linux distributions and install the appropriate files.
- Make sure a SupremeRAID™ SE compatible SSD drive is being used. SupremeRAID™ SE supports all form factors of NVMe drives, including M.2, U.2, U.3, EDSFF, and AIC.

BIOS Setting

- [OPTIONAL] The IOMMU function (AMD) or VT-d function (Intel) is recommended to be disabled in the system BIOS, typically found on the BIOS Advanced page.
- [OPTIONAL] It is highly recommended to disable the UEFI Secure Boot function on the BIOS security page. If UEFI Secure Boot is not applicable in your system, you will need to sign the NVIDIA Kernel Module. For further information and troubleshooting, please refer to the NVIDIA website.

Installing the Software Driver

The recommended and quickest way to install the SupremeRAID™ SE software is by using the pre-installer scripts and installer (described below).

Using the Pre-installer and Installer

The SupremeRAID™ SE pre-installer is an executable file that contains the required dependencies and a setup script that installs the NVIDIA driver. The script makes it easy to prepare the environment and install the SupremeRAID™ SE driver on every supported Linux distribution. Use the following steps to prepare the environment and install the SupremeRAID™ SE driver using the pre-installer in supported Linux distributions.

Note: To run the pre-installer, the system must have internet access to download the required dependencies from the official mirror.

Step 1 Go to the Graid Technology website to download the latest version of the pre-installer and make it executable. Please download the package in [Dependencies and Utilities](#).


Dependencies and Utilities

| | Links |
|-------------------------------|---|
| NVIDIA Driver | NVIDIA-Linux- |
| SupremeRAID™ SE Pre-installer | graid-sr-se-pre-installer |

```
$ sudo wget [filelink]
$ sudo chmod +x [Filename]
$ sudo ./[filename]
```

Step 2 Download the latest version of the installer and make it executable. Please download the installer from the [Driver Package](#) section.

Driver Package

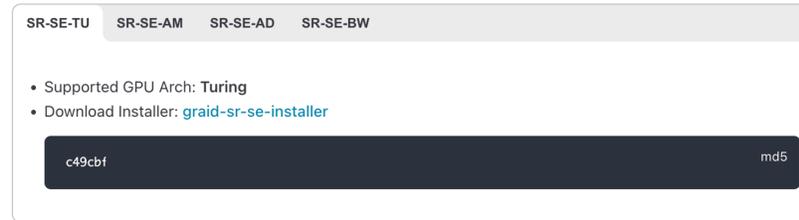


SR-SE-TU SR-SE-AM SR-SE-AD SR-SE-BW

- Supported GPU Arch: Turing
- Download Installer: [graid-sr-se-installer](#)


c49cbf md5

```
$ sudo wget[filelink]
$ sudo chmod +x [Filename]
$ sudo ./[filename]
```


Step 3 At the Welcome page, select Next and press Enter to view the end-user license agreement.

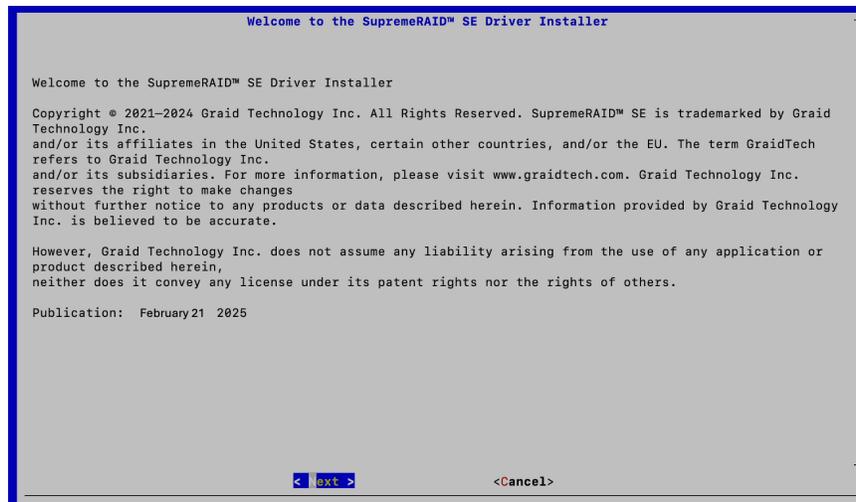

Step 4 In the end-user license agreement page, you can scroll down to read the license content. After reviewing the license, accept the agreement, and click Next to proceed.

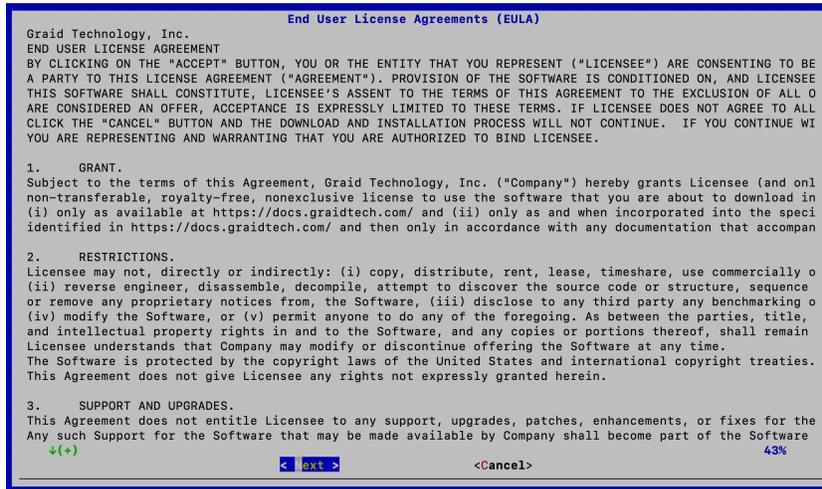

Step 5 Complete the installation. You can access the SupremeRAID™ SE Management Console by clicking the link. The SupremeRAID™ SE Management Console requires port 50060 to be open for pro per functionality. If this port is not enabled, the web interface may not work correctly.

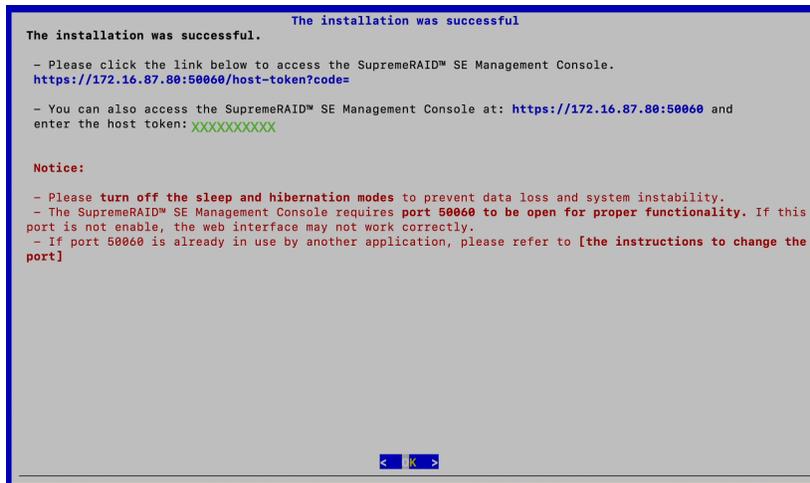


If port 50060 is occupied by another application, you can set up your own port and IP, please edit the configuration file `/etc/graidmgr/service.conf`.

For example, if you want to set the port and IP to 8888 and 123.456.7.889 respectively, it would look as follows:

```
[common]
web_port=8888
web_addr= "172.16.12.34"
```

Step 6 Enter the host token into the SupremeRAID™ SE Management Console.

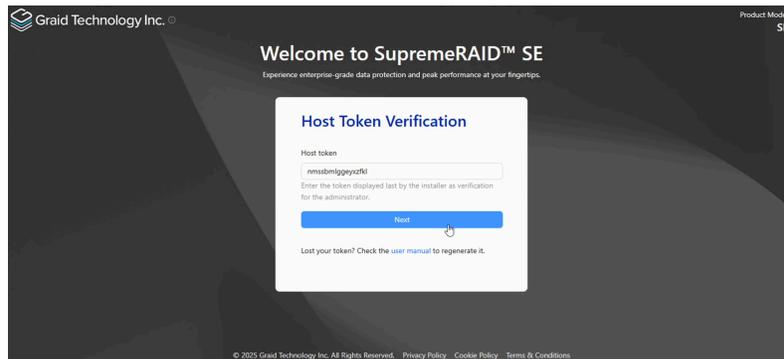


If you have lost the host token, please use the following command to retrieve the host token.

```
sudo graid-mgr host_token gen
```


Step 7 Please select your preferred mode. SupremeRAID™ SE offers two different modes: Perpetual and Subscription.

*Perpetual: For licensing inquiries, please contact our [Sales Department](#).


*Subscription: This is a Beta release, provided solely for the purpose of testing and evaluating new features. It is not intended for use in production environments and may exhibit stability or performance issues. We encourage you to use it exclusively for testing and to share your feedback to help us enhance the final version.

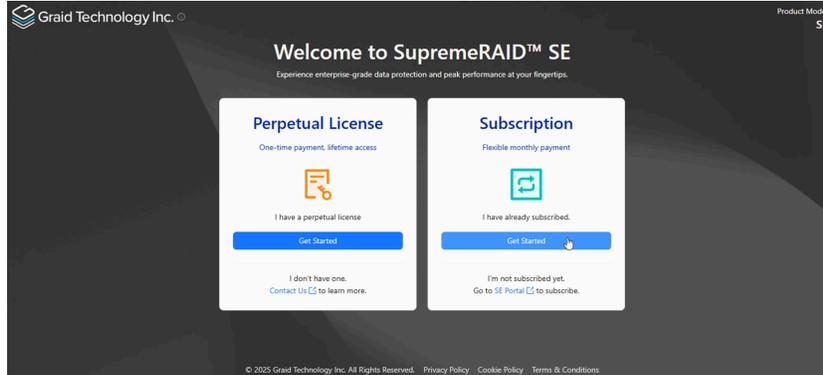


Step 8 If you choose Subscription mode, please log in to the SupremeRAID™ SE Management Console using the email and password you [signed up](#) with.

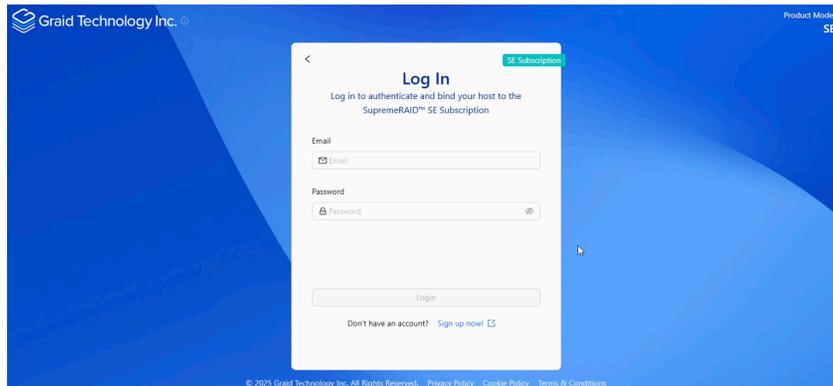

If you choose Perpetual mode, please set up password.

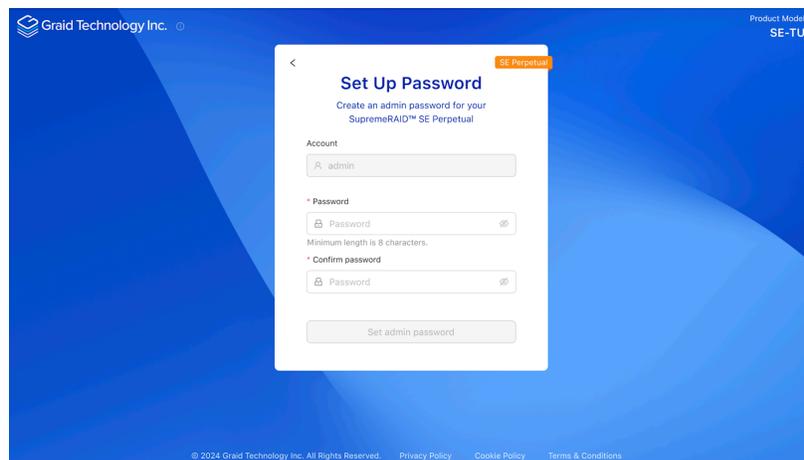


Step 9 Bind your GPU and start the RAID setup

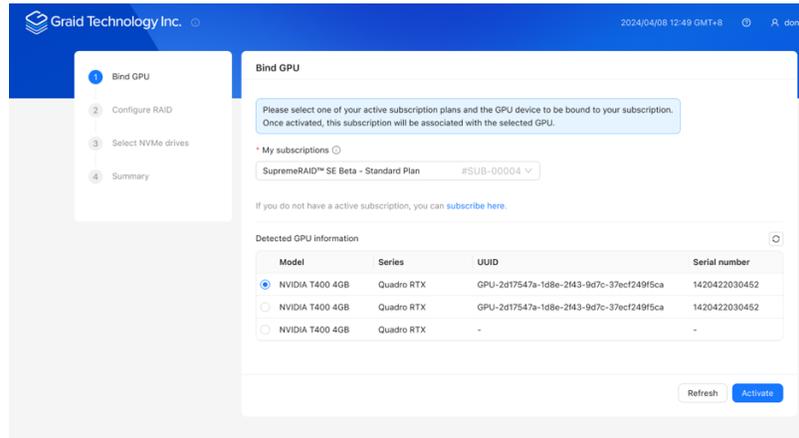

Uninstalling the Software Driver

Open the Linux **Terminal**, then enter the following command to uninstall the driver.

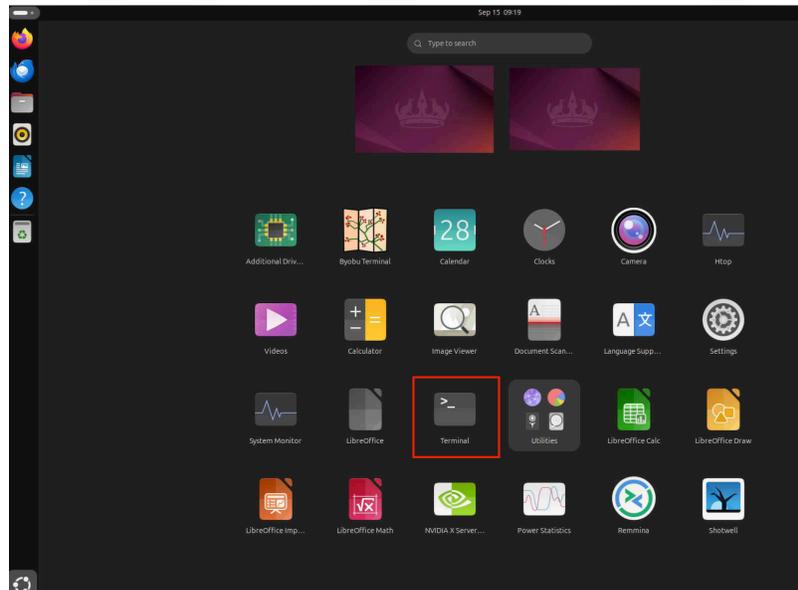

Ubuntu & Debian

```
sudo systemctl stop graid graid-mgr
sudo dpkg -r graid-sr graid-mgr
sudo reboot
```

or

```
sudo systemctl stop graid graid-mgr
sudo apt remove graid-sr -y
sudo reboot
```

RHEL & SUSE :

```
sudo systemctl stop graid graid-mgr
sudo rpm -e graid-sr graid-mgr
sudo reboot
```


or

```
sudo systemctl stop graid graid-mgr
sudo dnf remove -y graid-sr
sudo reboot
```

Managing Physical Drives

Creating a Physical Drive

To create physical drives, please log in to the SupremeRAID™ SE Management Console, then navigate to the RAID management / Physical Drives section on the sidebar menu and click the “Create” button.

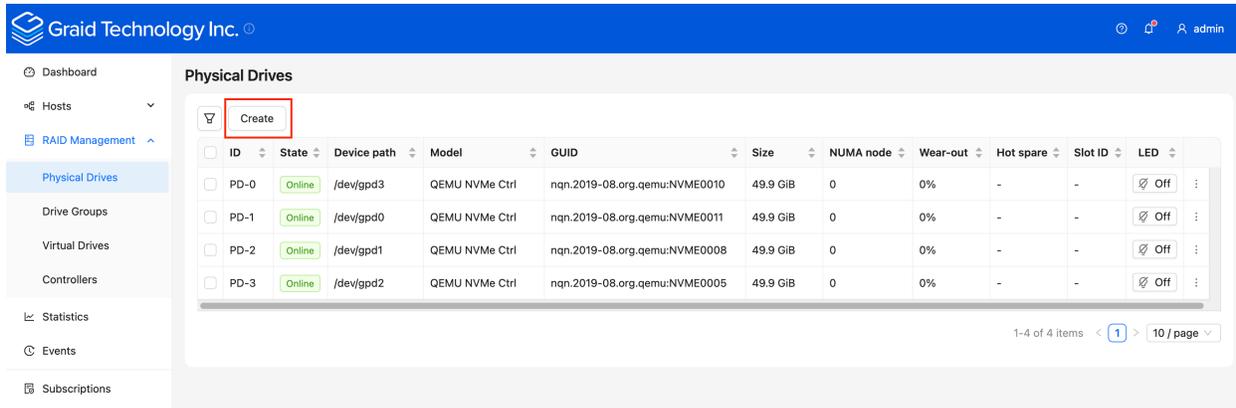


Physical Drive State:

| State | Description |
|-------------------|--|
| ONLINE | Physical drive was added to a drive group and is ready to work. |
| HOTSPARE | Physical drive is configured as a hot spare drive. |
| FAILED | Physical drive is detected, but it is not operating normally. |
| OFFLINE | Physical drive is marked as offline. |
| REBUILD | Physical drive is being rebuilt. |
| MISSING | Physical drive cannot be detected. |
| UNCONFIGURED_GOOD | Physical drive did not join a drive group. |
| UNCONFIGURED_BAD | Physical drive did not join a drive group and is not operating normally. |
| COPYBACK | Physical Drive is performing copyback |

Deleting a Physical Drive

To delete physical drives, please select the physical drives you want to delete and click the “Delete” button.

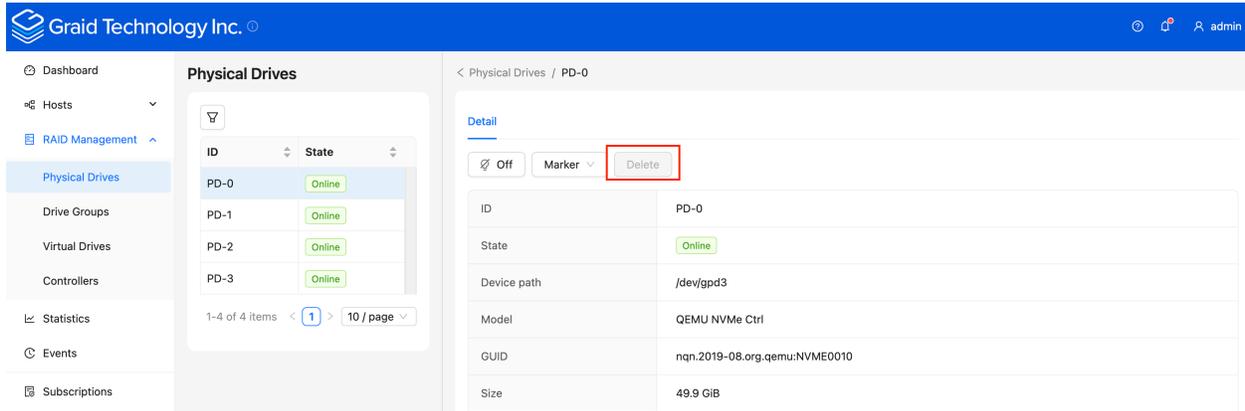


The screenshot shows the Graid Technology Inc. web interface. On the left is a navigation menu with options like Dashboard, Hosts, RAID Management, Physical Drives, Drive Groups, Virtual Drives, Controllers, Statistics, Events, and Subscriptions. The main content area is titled 'Physical Drives' and shows a list of four physical drives (PD-0, PD-1, PD-2, PD-3), all with a state of 'Online'. Below the list is a pagination control showing '1-4 of 4 items' and '10 / page'. To the right, the 'Detail' view for 'PD-0' is shown, with a 'Delete' button highlighted by a red box. The details for PD-0 include: ID: PD-0, State: Online, Device path: /dev/gpd3, Model: QEMU NVMe Ctrl, GUID: nqn.2019-08.org.qemu:NVME0010, and Size: 49.9 GiB.

Note: You cannot delete a physical drive which is used by drive group.

Marking a Physical Drive Online/Offline/Good/Bad

To mark a physical drive as Online/Offline/Good/Bad, please select the physical drives you want to change and click the “Marker” button.

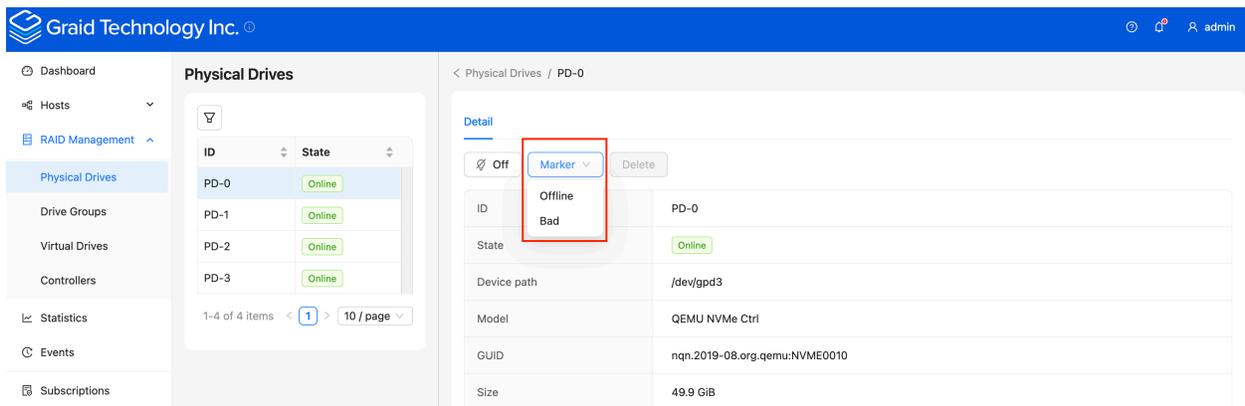

The screenshot shows the Graid Technology Inc. web interface. On the left is a navigation menu with options like Dashboard, Hosts, RAID Management, Physical Drives, Drive Groups, Virtual Drives, Controllers, Statistics, Events, and Subscriptions. The main content area is titled 'Physical Drives' and shows a list of four physical drives (PD-0, PD-1, PD-2, PD-3), all with a state of 'Online'. Below the list is a pagination control showing '1-4 of 4 items' and '10 / page'. To the right, the 'Detail' view for 'PD-0' is shown, with a 'Marker' button highlighted by a red box. The details for PD-0 include: ID: PD-0, State: Online, Device path: /dev/gpd3, Model: QEMU NVMe Ctrl, GUID: nqn.2019-08.org.qemu:NVME0010, and Size: 49.9 GiB.

Assigning a Hot Spare Drive

To assign a physical drive as a hot spare, please select the physical drives you want assign and click the “Hot spare” button.

The screenshot displays the Graid Technology Inc. web interface. On the left is a navigation menu with options like Dashboard, Hosts, RAID Management, Physical Drives, Drive Groups, Virtual Drives, Controllers, Statistics, Events, and Subscriptions. The main content area is titled 'Physical Drives' and shows a table of physical drives:

| ID | State |
|------|-------------------|
| PD-0 | Unconfigured good |
| PD-1 | Online |
| PD-2 | Online |
| PD-3 | Online |


Below the table, it indicates '1-4 of 4 items' and '10 / page'. To the right, the 'Detail' view for 'PD-0' is shown, including buttons for 'On', 'Mark', 'Hot spare' (highlighted with a red box), and 'Delete'. The details table for PD-0 is as follows:

| | |
|-------------|-------------------------------|
| ID | PD-0 |
| State | Unconfigured good |
| Device path | /dev/gpd3 |
| Model | QEMU NVMe Ctrl |
| GUID | nqn.2019-08.org.qemu:NVME0010 |
| Size | 49.9 GiB |

Managing Drive Groups

Creating a Drive Group

To create a drive group, please log in to the SupremeRAID™ SE Management Console, then navigate to the RAID management / Drive Group section on the sidebar menu and click the “Create” button.

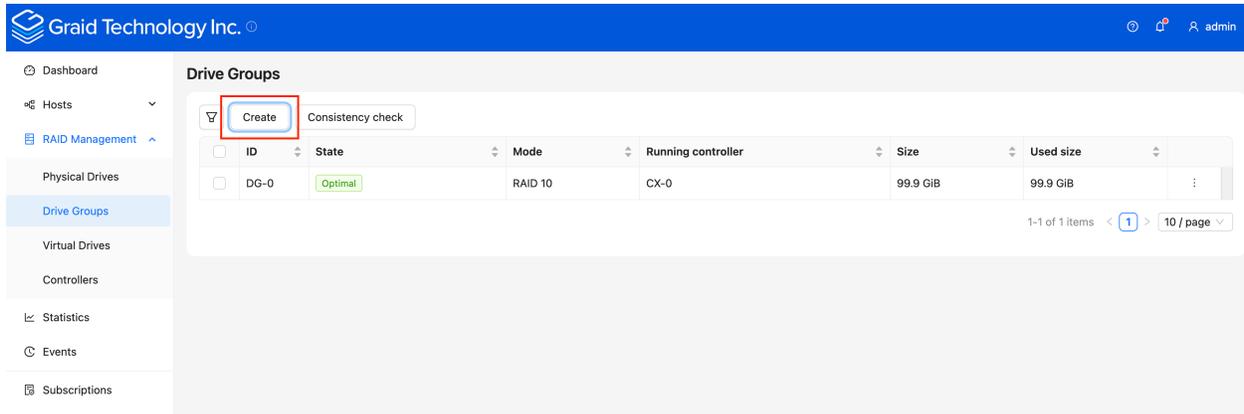


Drive Group State:

| State | Description |
|--------------------|--|
| OFFLINE | Drive group is not working properly. This condition usually occurs when the number of damaged physical drives exceeds the limit. |
| OPTIMAL | Drive group is in optimal state. |
| OPTIMAL (!) | Drive group is in optimal state but found inconsistency data. |
| OPTIMAL (cc) | Drive group is in optimal state and the consistency check task is ongoing. |
| OPTIMAL (cp) | Drive group is performing copyback. |
| OPTIMAL (cc!) | Drive group is in optimal state and the consistency check task is ongoing but found inconsistent data. |
| DEGRADED | Drive group is available and ready, but the number of missing or failed physical drives has reached the limit. |
| PARTIALLY_DEGRADED | Drive group is available and ready for use, but some physical drives are missing or failed. |

| State | Description |
|----------|--|
| RECOVERY | Drive group is recovering |
| FAILED | Drive group is not working normally. |
| INIT | Drive group is initializing. |
| RESYNC | Drive group is resynchronizing. This condition usually occurs when the system encounters an abnormal crash. Do not replace the physical drive in this state until the resynchronization process completes. |
| RESCUE | Drive group is in rescue mode. |

Deleting a Drive Group

To delete a drive group, please log in to the SupremeRAID™ SE Management Console, then navigate to the RAID management / Drive Group section on the sidebar menu. Please select the drive group you want to delete and click the “Delete” button.

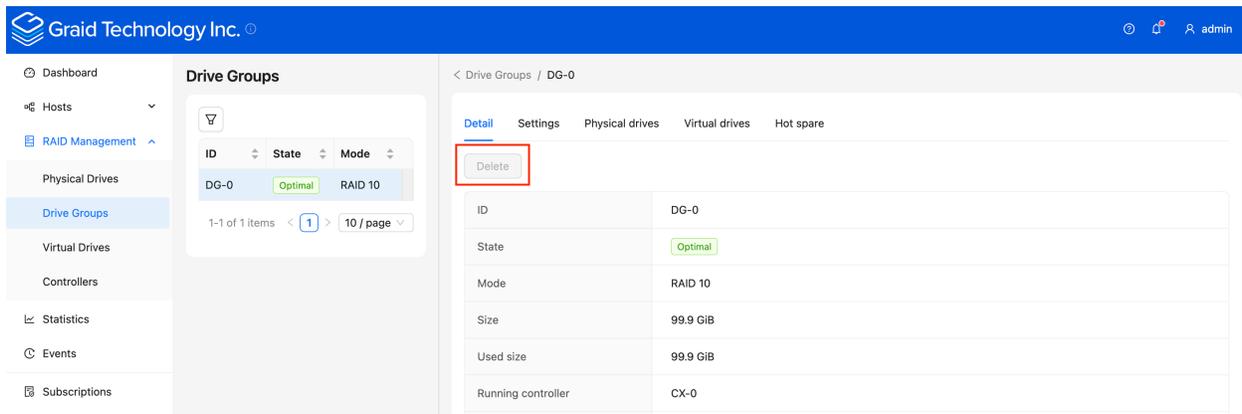


Note: You cannot delete a drive group that contains a virtual drive.

Degradation and Recovery

If multiple drive groups require simultaneous recovery, the drive groups recover individually. If multiple physical drives in the same drive group require rebuilding, the physical drives are rebuilt simultaneously.

Rescue Mode

If a damaged drive group is initialized or a recovering drive group encounters an abnormal system crash, the data integrity of the drive group is affected. In this event, the drive group is forced offline to prevent data from being written to the drive group. To read the data from the drive group, force the drive group to go online using Rescue mode.

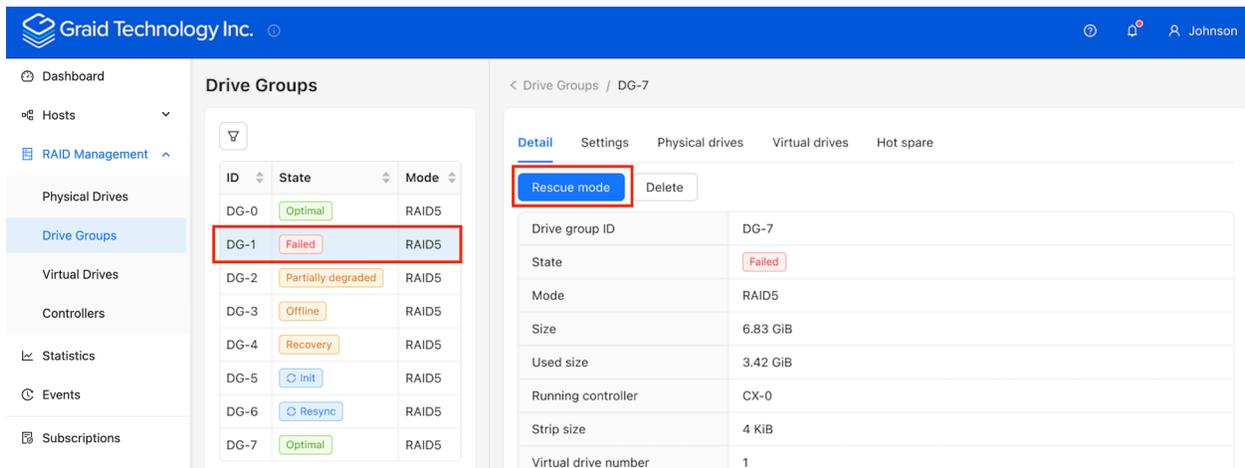

The screenshot displays the Graid Technology Inc. web interface. On the left is a navigation sidebar with options like Dashboard, Hosts, RAID Management, Physical Drives, Drive Groups, Virtual Drives, Controllers, Statistics, Events, and Subscriptions. The main area is titled 'Drive Groups' and contains a table with columns for ID, State, and Mode. The table lists drive groups DG-0 through DG-7. DG-1 is highlighted with a red box and has a 'Failed' state. To the right, the 'Detail' view for DG-7 is shown, with a 'Rescue mode' button highlighted in blue. Below the table is a detailed view for DG-7 with the following properties:


| Property | Value |
|----------------------|----------|
| Drive group ID | DG-7 |
| State | Failed |
| Mode | RAID5 |
| Size | 6.83 GiB |
| Used size | 3.42 GiB |
| Running controller | CX-0 |
| Strip size | 4 KiB |
| Virtual drive number | 1 |

Note: A drive group in Rescue mode is read-only. Rescue mode cannot be disabled

Managing Virtual Drives

Creating a Virtual Drive

To create virtual drives, please log in to the SupremeRAID™ SE Management Console, then navigate to the RAID management / Virtual Drives section on the sidebar menu. Please click the “Create” button to select which the drive group you want to create virtual drives.

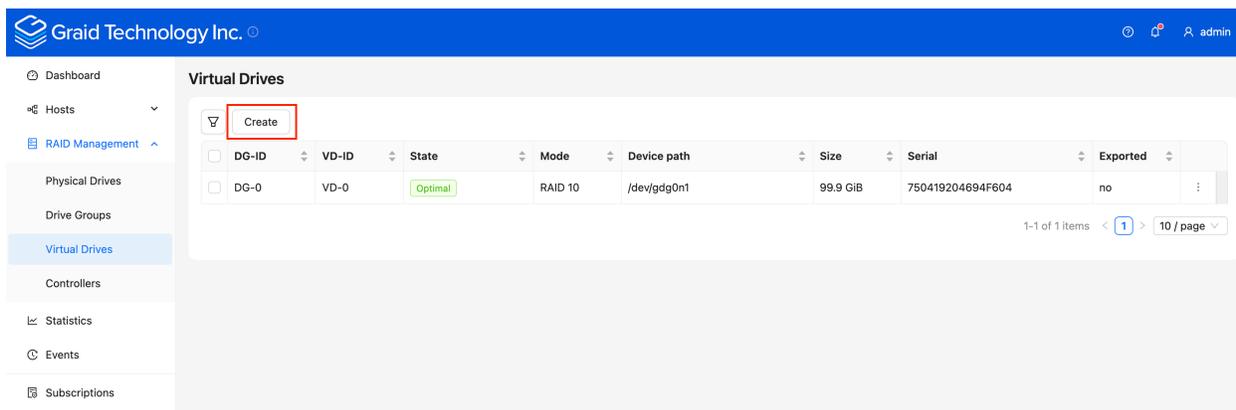

Virtual Drive State:

| State | Description |
|--------------------|--|
| OFFLINE | Drive group is not working normally. This condition is usually caused when the number of damaged physical drives exceeds the limit. |
| OPTIMAL | Drive group is in the optimal state. |
| PARTIALLY_DEGRADED | Drive group is available and ready for use, but some physical drives are missing or failed. |
| RECOVERY | Drive group is recovering. |
| FAILED | Drive group is not working normally. |
| INIT | Drive group is initializing. |
| RESYNC | Drive group is resynchronizing. This condition usually occurs when the system encounters an abnormal crash. Do not replace the physical drive in this state until the resynchronization process completes. |


| State | Description |
|--------|--------------------------------|
| RESCUE | Drive group is in rescue mode. |

Stripe-cache state:

| State | Description |
|---------|--|
| OFFLINE | Stripe cache drive group is OFFLINE. |
| CLEAN | Stripe cache write-back has finished. |
| PURGE | Stripe cache is writing data into the virtual drive. |
| ACTIVE | Stripe cache is in optimal state. |

Deleting a Virtual Drive

To delete a virtual drive, please log in to the SupremeRAID™ SE Management Console, then navigate to the RAID management / Virtual Drives section on the sidebar menu. Please select the virtual drive you want to delete and click the “Delete” button.

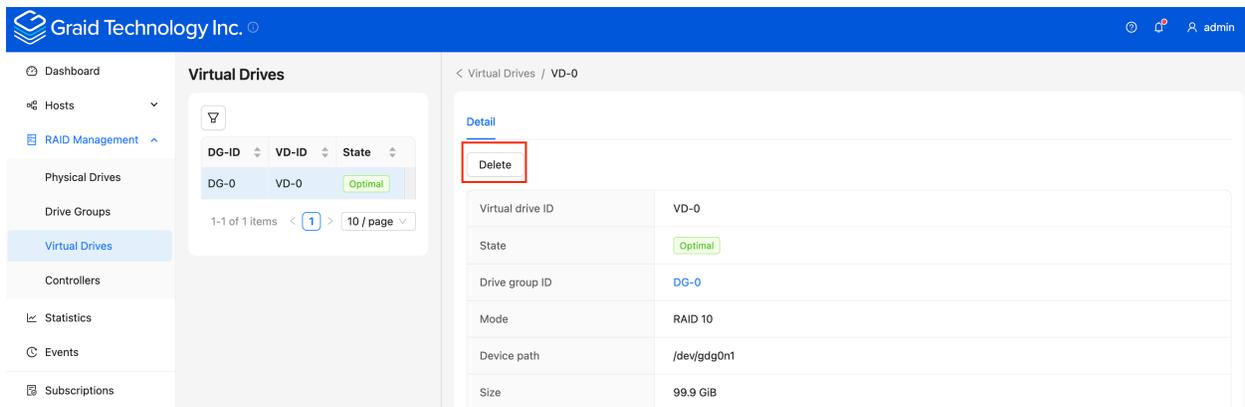


Features Overview

Consistency Checks

The consistency check operation verifies that the data is correct in Drive Groups that use RAID levels 1, 5, and 10. In a system with parity, for example, checking consistency calculates the data on one drive and compares the results to the contents of the parity drive.

To start the consistency check, please log in to the SupremeRAID™ SE Management Console, then navigate to the RAID management / Drive Group section on the sidebar menu. Select the drive group you want to perform the Consistency Check on and click the “Consistency Check” button.

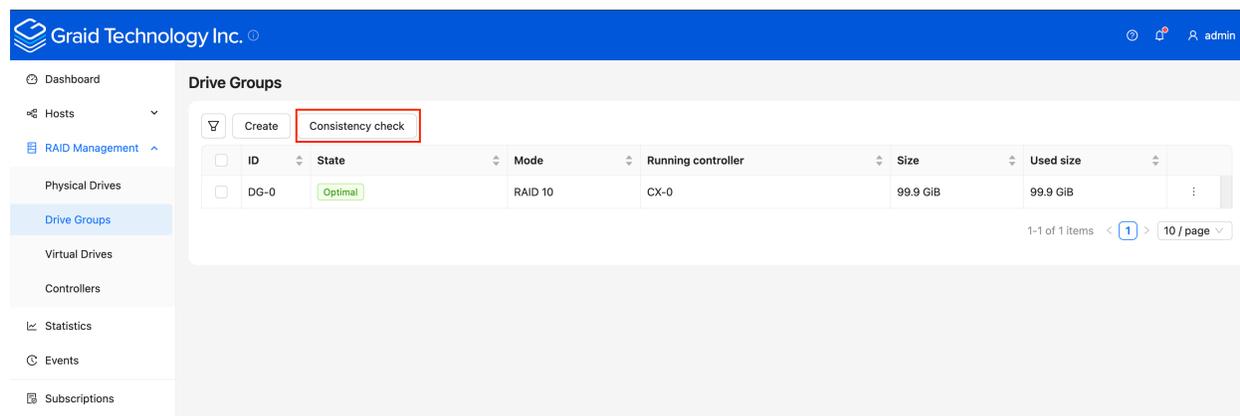


Note: You cannot perform a consistency check on RAID 0 because it does not provide data redundancy. Additionally, a consistency check can only run when the DG is in OPTIMAL or PARTIALLY_DEGRADED state.

Drive Copyback

The Drive Copyback feature allows users to manually initiate data migration from one drive to another without affecting the overall Drive Group state. This operation is user-controlled and can be performed for various reasons, such as replacing an aging drive, preparing for hardware upgrades, or managing storage configurations.

To start the Copyback, please log in to the SupremeRAID™ SE Management Console, then navigate to the RAID management / Drive Group section on the sidebar menu. Select the drive group you want to


perform the Copyback on and click the Physical Drives tab. Choose the physical drive first and click the “Actions” button to conduct Copyback.

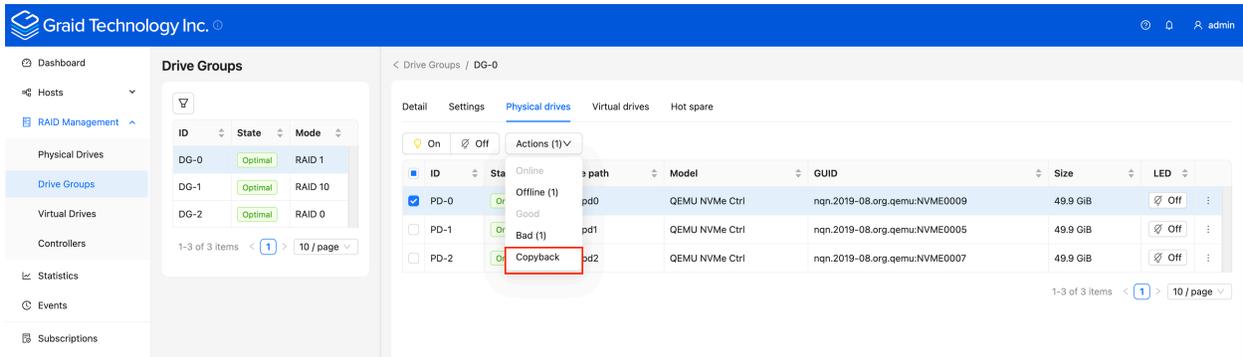

Double Failure Protection with Distributed Journaling

SupremeRAID™ SE incorporates a distributed journaling mechanism specifically designed to safeguard data during abnormal shutdowns in double-failure scenarios. This system ensures data integrity by logging data in a dedicated journaling space before writing it to the storage area. Any incomplete I/O operations are replayed upon service restart to maintain data consistency.

This journaling feature is automatically enabled in degraded mode to uphold data integrity. Additionally, users still have the flexibility to bypass journaling space reservation when creating a drive group.

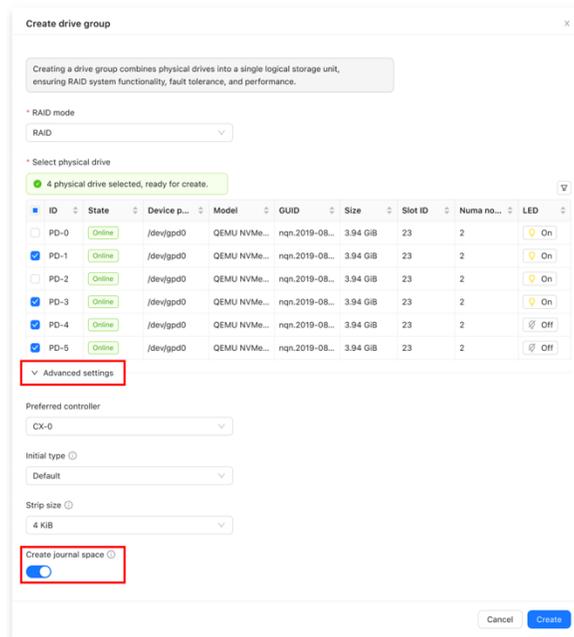

Note: Only RAID5 can enable the journal function. If the user bypasses the creation of the journal space, it cannot be recreated.

Support for the Dataset Management (DSM) Deallocate command on virtual drives

The SupremeRAID™ SE driver introduces support for the NVMe DSM deallocate (trim) command on virtual drives, improving the efficiency of unused storage space management on NVMe SSDs. This feature allows filesystems or applications to issue deallocate commands on virtual drives, which are then translated by the driver and sent directly to the SSDs. By enabling the drives to manage deallocated blocks internally, this reduces write amplification, optimizes storage efficiency, and enhances overall performance.

When a discard command is issued to a virtual drive, it triggers a corresponding deallocate command to the underlying NVMe SSDs. The system supports a minimum discard range of 4KB, aligned with the logical block addressing (LBA) size, and can handle a maximum deallocate range of approximately 400 GiB per command. For larger discard operations, the filesystem and block layer handle the process seamlessly.

This feature is automatically enabled on NVMe SSDs that support the deallocate command and guarantee that deallocated blocks return zeros. For SSDs without this guarantee, the system defaults to a "write zeros" command to ensure data consistency. This flexible approach ensures broad compatibility across different SSDs while optimizing their individual capabilities.

To ensure the filesystem can take advantage of this capability and issue discard commands when files are deleted, it must be mounted with the **discard** option.

Attachments

Events for SupremeRAID™ SE

| Category | Severity | Description |
|----------------|---|---|
| Physical Drive | Warning | Physical Drive <PD_ID> state has transitioned from <STATE_OLD> to unconfigured bad. |
| | Critical | Physical Drive <PD_ID> state has transitioned from <OLD_STATE> to failed. |
| | Warning | Physical Drive <PD_ID> state has transitioned from <OLD_STATE> to offline. |
| | Critical | Physical Drive <PD_ID> state has transitioned from <OLD_STATE> to missing. |
| | Info | Physical Drive <PD_ID> state has transitioned from <OLD_STATE> to online. |
| | Info | Physical Drive <PD_ID> state has transitioned from <OLD_STATE> to rebuild. |
| | Info | Physical Drive <PD_ID> state has transitioned from <OLD_STATE> to unconfigured good. |
| | Info | Physical Drive <PD_ID> has been successfully created. |
| | Info | Physical Drive <PD_ID> has been deleted. |
| | Info | Physical Drive <PD_ID> has been hot-plugged. |
| | Warning | Physical Drive <PD_ID> has been hot-removed. |
| | Warning | The temperature of Physical Drive <PD_ID> is currently <CURRENT_TEMP> degrees, which exceeds the Warning threshold of <THRESHOLD_TEMP> degrees. Critical Warning error code: ERROR_CODE. |
| | Critical | The temperature of Physical Drive <PD_ID> is currently <CURRENT_TEMP> degrees, which exceeds the Critical threshold of <THRESHOLD_TEMP> degrees. Critical Warning error code: ERROR_CODE. |
| | Critical | The available spare capacity <AVAIL_SPARE> of Physical Drive <PD_ID> has fallen below the threshold <SPARE_THRESHOLD>. Critical Warning error code: <ERROR_CODE>. |
| Critical | The NVM subsystem reliability of Physical Drive <PD_ID> has been degraded due to significant media related errors or any internal error that degrades NVM subsystem reliability. Critical Warning error code: <ERROR_CODE>. | |

| | | |
|-------------|--|--|
| | Critical | All of the media of Physical Drive <PD_ID> has been placed in read only mode. Critical Warning error code: <ERROR_CODE>. |
| | Critical | The volatile memory backup device of Physical Drive <PD_ID> has failed. Critical Warning error code: <ERROR_CODE>. |
| | Critical | The Persistent Memory Region of Physical Drive <PD_ID> has become read-only or unreliable. Critical Warning error code: <ERROR_CODE>. |
| | Warning | Physical Drive <PD_ID> is currently experiencing a wearout level of WEAROUT, surpassing the Warning threshold of <THRESHOLD_WEAROUT>. |
| | Critical | Physical Drive <PD_ID> is currently experiencing a wearout level of WEAROUT, surpassing the Critical threshold of <THRESHOLD_WEAROUT>. |
| Drive Group | Fatal | Drive Group <DG_ID> state has transitioned from <OLD_STATE> to failed. |
| | Critical | Drive Group <DG_ID> state has transitioned from <OLD_STATE> to offline. |
| | Critical | Drive Group <DG_ID> state has transitioned from <OLD_STATE> to degraded. |
| | Warning | Drive Group <DG_ID> state has transitioned from <OLD_STATE> to rescue. |
| | Warning | Drive Group <DG_ID> state has transitioned from <OLD_STATE> to partially degraded. |
| | Info | Drive Group <DG_ID> state has transitioned from <OLD_STATE> to optimal. |
| | Info | Drive Group <DG_ID> state has transitioned from <OLD_STATE> to recovery. |
| | Info | Drive Group <DG_ID> state has transitioned from <OLD_STATE> to init. |
| | Info | Drive Group <DG_ID> state has transitioned from <OLD_STATE> to resync. |
| | Info | Drive Group <DG_ID> has been successfully created. |
| | Info | Drive Group <DG_ID> has been deleted. |
| | Info | Consistency Check for Drive Group <DG_ID> has been manually aborted. |
| | Info | Consistency Check for Drive Group <DG_ID> has been aborted due to the deletion of the Drive Group. |
| | Info | Consistency Check for Drive Group <DG_ID> was aborted due to the Drive Group migrating from Controller <CX_OLD> to <CX_NEW>. |
| Info | Consistency Check for Drive Group <DG_ID> has been aborted due to the Drive Group's state transitioning to <DG_STATE>. | |

| | | |
|---------------|----------|---|
| | Info | Manual Consistency Check for Drive Group <DG_ID> has been completed. |
| | Info | Scheduled Consistency Check for Drive Group <DG_ID> has completed. |
| | Info | Manual Consistency Check for Drive Group <DG_ID> has started. |
| | Info | Scheduled Consistency Check for Drive Group <DG_ID> has started. |
| | Info | Inconsistency in Drive Group <DG_ID> has been fixed at: Drive Group block range: <DG_INTERS>. |
| | Critical | Inconsistency detected in Drive Group <DG_ID> at: Drive Group block range: <DG_INTERS>. |
| | Critical | Consistency Check for Drive Group <DG_ID> has been aborted due to the 'stop_on_error' policy. |
| | Critical | Consistency Check for Drive Group <DG_ID> has been aborted due to numerous inconsistencies found and fixed. |
| | Info | Journal Replay for Drive Group <DG_ID> has started. |
| | Info | Journal Replay for Drive Group <DG_ID> has been completed. Entry replayed <REPLAYNR>. |
| | Critical | Journal Replay for Drive Group <DG_ID> has been waiting Physical Drive <PD_ID> to be active. |
| | Critical | Journal Replay for Drive Group <DG_ID> has been aborted due to inconsistency detected on journal. |
| Virtual Drive | Info | Inconsistency for Virtual Drive <VD_ID> within Drive Group <DG_ID> has been fixed at: Virtual Drive block range: <VD_OFFSETS>. |
| | Critical | Inconsistency found in Virtual Drive VD_ID of Drive Group <DG_ID> at: Virtual Drive block range: <VD_OFFSETS>. |
| | Info | Virtual Drive VD_ID for Drive Group <DG_ID> has been created successfully. |
| | Info | Virtual Drive VD_ID for Drive Group <DG_ID> has been deleted. |
| | Info | Stripe cache for Virtual Drive <VD_ID> on Drive Group <DG_ID> has been deleted. |
| | Info | Stripe cache for Virtual Drive <VD_ID> on Drive Group <DG_ID> has been created successfully. |
| Controller | Warning | The temperature of Controller <CX_ID> is currently <CURRENT_TEMP> degrees, which exceeds the GPU threshold of <THRESHOLD_TEMP> degrees. |

| | |
|----------|--|
| Warning | The temperature of Controller <CX_ID> is currently <CURRENT_TEMP> degrees, which exceeds the GPU memory threshold of <THRESHOLD_TEMP> degrees. |
| Warning | The temperature of Controller <CX_ID> is currently <CURRENT_TEMP> degrees, it will cause controller slowdown. |
| Critical | The temperature of Controller <CX_ID> is currently <CURRENT_TEMP> degrees, it will cause controller shutdown. |

FAQ

Subscription Plans

| Question | Answer |
|--|---|
| <p>How to subscribe SupremeRAID™ SE</p> | <p>1.Prepare Hardware: Ensure you have a compatible GPU card and NVMe SSDs. Please refer to the Release Notes and select the software version to view the complete list of supported devices.</p> <p>2.Sign up for a trial by creating an account with your email in the User Portal. Please note that one user account is restricted to a single subscription, machine and GPU. Cross-device usage is not supported.</p> <p>3. Installation: Follow the instructions in the User Guide to install the SupremeRAID™ SE.</p> |
| <p>What subscription plans are currently available for SupremeRAID™ SE</p> | <p>There are currently two subscription plans available for SupremeRAID™ SE: the Standard Plan and the Premium Plan.</p> <p>The primary difference between the two lies in the number of supported NVMe SSDs. The Standard Plan supports up to four NVMe SSDs, while the Premium Plan supports up to eight.</p> |
| <p>Can I upgrade my subscription plan from Standard to Premium</p> | <p>The upgrade feature is not yet available, but it will be gradually rolled out in the future. If you wish to upgrade your plan to support more physical drives, please contact us.</p> |
| <p>How to cancel my subscription</p> | <p>You may cancel your subscription at any time by logging into the User Portal.</p> |
| <p>What will happen to my data once the subscription is canceled</p> | <p>After canceling your subscription, the system will stop charging you on the next billing date. Your data will not be lost. Instead, it will be placed in read-only mode. You will still be able to access and read the data within the folder; however, you will no longer be able to write or add new data to the folder.</p> |

Supported Operating Systems & Devices

| Question | Answer |
|--|--|
| What kind of GPU does SupremeRAID™ SE support | NVIDIA GPUs. Please refer to the Release Notes to view the complete list of supported GPUs. |
| What form factor of NVMe drives can I use with SupremeRAID™ SE | SupremeRAID™ SE supports all form factors of NVMe drives, including M.2, U.2, U.3, EDSFF, and AIC. |
| What kind of Operating Systems does SupremeRAID™ SE support | SupremeRAID™ SE supports both Windows and Linux. Please refer to the Release Notes and select the software version to view the complete list of supported Operating Systems. |
| Does SupremeRAID™ SE support cross-device usage | Cross-device usage is currently not supported. Each user account is bound to a single subscription, machine and GPU. |

Billing & Payments

| Question | Answer |
|---|--|
| What payment methods are available for subscribing to SupremeRAID™ SE | Currently, we only accept credit card payments. |
| What is the billing cycle | SupremeRAID™ SE is based on a monthly billing cycle. |
| When is the billing date | You will be automatically charged once a month. For example, if your first payment is on July 5, the renewal charge will be processed automatically on August 5 (depending on the time difference, there may be a difference of one day earlier or later), unless you cancel your subscription plan prior to that date. |
| Are there any processing fees associated with credit card payments | You may be charged a Cross-Border Fee (CBF). This fee is charged by the credit card issuing organizations (such as Visa or Mastercard). It may apply when the cardholder makes a purchase with an overseas merchant, regardless of whether the transaction currency is the local currency or the cardholder's home currency. |

| Question | Answer |
|---|--|
| Where can I view my billing records | You can log in to the User Portal to view the billing amount and billing history. |
| How can I update my payment information | You can log in to the User Portal to update your credit card information. |
| Why did my payment fail | Please ensure that the credit card information you provide are correct and that there is sufficient credit available. |
| What happens after a payment failure | After a payment failure, we will attempt to charge your card again after one day. If the payment still cannot be processed successfully, we will automatically cancel your subscription. You can reactivate your subscription at any time using a valid credit card. |

Account Management

| Question | Answer |
|---|--|
| How can I update my account information | You can log in to the User Portal to update your account information. |
| Can a single user account subscribe to more than one SupremeRAID™ SE plan | Currently, each user account is limited to a single subscription plan. |
| Can the same account be logged in on different machines | One user account is restricted to a single subscription, machine and GPU. Cross-device usage is not supported. |

Product & Service

| Question | Answer |
|--|---|
| <p>What should I do if I want to switch to another SupremeRAID™ product after using the SupremeRAID™ SE</p> | <p>Currently, the SupremeRAID™ SE does not support cross-product data migration. If you wish to use another SupremeRAID™ products, please export your data from the SupremeRAID™ SE beforehand. Please note that once another product is installed, you will not be able to revert to the previous product configuration. If you have previously installed other SupremeRAID™ products, executing the SupremeRAID™ SE installation will prevent the restoration of previous product settings.</p> |
| <p>Is there a performance difference between Quadro/RTX and GTX series cards</p> | <p>Performance Advantage: Quadro/RTX cards support larger BAR1 memory, enabling direct communication between the GPU and NVMe drives. This significantly benefits performance, especially in Linux environments.</p> |
| <p>Does the SupremeRAID™ SE driver support system suspension or hibernation</p> | <p>System suspension and hibernation are currently unsupported. Please ensure that the machine does not enter suspension or hibernation mode.</p> |
| <p>What language versions does SupremeRAID™ SE offer</p> | <p>Currently, only the English version is available.</p> |
| <p>Does SupremeRAID™ SE support SAS/SATA drives</p> | <p>SAS and SATA drives are not supported by the Windows driver.</p> |
| <p>Does SupremeRAID™ SE support Remote Target for NVMe-oF</p> | <p>Remote Target for NVMe-oF are not supported by both SupremeRAID™ SE Linux and Windows drives.</p> |
| <p>If my GPU fails during the subscription period and needs to be replaced, what is the proper procedure</p> | <p>Please contact us.</p> |