



# Intel® Virtual RAID on CPU (Intel® VROC) 9.2 for Linux\*

## Release Notes

---

*Revision 006*

*July 2025*



You may not use or facilitate the use of this document in connection with any infringement or other legal analysis. You may not use or facilitate the use of this document in connection with any infringement or other legal analysis concerning Intel products described herein. You agree to grant Intel a non-exclusive, royalty-free license to any patent claim thereafter drafted which includes subject matter disclosed herein.

No license (express or implied, by estoppel or otherwise) to any intellectual property rights is granted by this document.

All information provided here is subject to change without notice. Contact your Intel representative to obtain the latest Intel product specifications and roadmaps.

All product plans and roadmaps are subject to change without notice.

The products described may contain design defects or errors known as errata, which may cause the product to deviate from published specifications. Current characterized errata are available on request.

Intel technologies' features and benefits depend on system configuration and may require enabled hardware, software or service activation. Performance varies depending on system configuration. No computer system can be absolutely secure. Check with your system manufacturer or retailer or learn more at [intel.com](https://www.intel.com).

Intel disclaims all express and implied warranties, including without limitation, the implied warranties of merchantability, fitness for a particular purpose, and non-infringement, as well as any warranty arising from course of performance, course of dealing, or usage in trade.

Altering clock frequency, voltage, or memory interface speeds may void any product warranties and reduce stability, security, performance, and life of the processor and other components. Intel has not validated processor running memory above Plan-Of-Record (POR) speed. DRAM/DIMM devices should support desired speed, check with DRAM/DIMM vendors for details. System manufacturers are responsible for all validation and assume the risk of any stability, security, performance, or other functional issues resulting from such alterations.

© Intel Corporation. Intel, the Intel logo, Xeon®, and other Intel marks are trademarks of Intel Corporation or its subsidiaries.

\*Other names and brands may be claimed as the property of others.

Copyright© 2023-2025, Intel Corporation. All rights reserved.

# Contents

|    |   |    |
|----|---|----|
| 1  | Introduction .....  | 6  |
|    | 1.1 Overview .....  | 6  |
|    | 1.2 Terminology .....   | 6  |
|    | 1.3 Reference OEM Platform Documentation .....                                | 8  |
|    | 1.4 Supported Linux* OS Distributions.....                                    | 8  |
|    | 1.5 Supported PCIe NVMe SSDs .....  | 10 |
|    | 1.6 Intel® SSD Only VROC Upgrade Key.....                                     | 11 |
| 2  | New Features in Intel® VROC 9.0 Release .....                                 | 12 |
|    | 2.1 Support of Intel® VMD 4.0 .....   | 12 |
| 3  | New Features in Intel® VROC 8.0 Release .....                                 | 13 |
|    | 3.1 Support of Intel® VMD 3.0 .....   | 13 |
|    | 3.2 Support of 3 <sup>rd</sup> SATA Controller.....                           | 13 |
|    | 3.3 Support of Out-of-Band Management .....                                   | 13 |
|    | 3.4 Support of PCIe* Hot Plug on PCH .....                                    | 14 |
|    | 3.5 Support of Write-Intent Bitmap .....                                      | 14 |
| 4  | Intel® VROC Linux* Release Package .....                                      | 15 |
|    | 4.1 Release Package Contents in Intel® VROC 9.2 Release.....                  | 15 |
|    | 4.2 Release Package Contents in Intel® VROC 9.0 Release.....                  | 15 |
|    | 4.3 Release Package Contents in Intel® VROC 8.6 Release.....                  | 16 |
|    | 4.4 Release Package Contents in Intel® VROC 8.2 Release.....                  | 16 |
|    | 4.5 Release Package Contents in Intel® VROC 8.0 Release.....                  | 17 |
|    | 4.6 Release Packages for Out-of-Band Management in Linux*.....                | 18 |
| 5  | Installation of Intel® VROC Linux* .....                                      | 20 |
|    | 5.1 Installation of Intel® VROC Linux* Update Packages.....                   | 20 |
|    | 5.2 Configuring Intel® VROC in Linux* Distributions with Inbox Support.....   | 26 |
| 6  | Intel® VROC Linux* Limitations .....  | 28 |
|    | 6.1 Missing of 3 <sup>rd</sup> SATA Controller Device ID .....                | 28 |
|    | 6.2 Notice of Using Intel® VROC in RHEL* 9.0.....                             | 28 |
|    | 6.3 Linux* OS May Not Properly Boot/Install from A Degraded RAID Volume ..... | 29 |
|    | 6.4 Linux* native NVMe multipath supporting and capability .....              | 29 |
| 7  | Known Issues in Intel® VROC Linux* 9.0/9.x.....                               | 31 |
| 8  | Known Issues in Intel® VROC Linux* 8.6.....                                   | 32 |
| 9  | Known Issues in Intel® VROC Linux* 8.2.....                                   | 34 |
| 10 | Known Issues in Intel® VROC Linux* 8.0.....                                   | 36 |

## Tables

|   |    |
|---|----|
| Table 1-1. Terminology .....  | 6  |
| Table 5-1. 3 <sup>rd</sup> SATA Controller Dev ID support .....         | 28 |
| Table 5-2. Known Issues Resolved in RHEL* 9.0 with Errata .....         | 29 |
| Table 7-1. Fail to reboot after NVMe RAIDs are built in the system..... | 31 |
| Table 7-2. Fail to change LED state in the guest OS .....               | 31 |



|  |    |
|--|----|
| Table 7-3. Fail to hot remove the NVMe device in the guest OS .....  | 31 |
| Table 8-1. Fail to Enable/Disable PPL Consistency Policy for RAID5 Volumes .....   | 32 |
| Table 8-2. RAID Migration from RAID1/10 to RAID0 May Fail in Certain Linux* OS<br>Versions .....   | 32 |
| Table 9-1. <i>mdadm</i> – <i>Examine</i> Command May not Report the Correct RAID Volume Size<br>34   | 34 |
| Table 9-2. LVM Logical Volume Creation is Failed .....   | 34 |
| Table 9-3. Online Capacity Expansion (OCE) May Not Start on the Second RAID Volume<br>of Intel® VROC Matrix RAID .....                     | 34 |
| Table 9-4. Spare Drive Cannot be Chosen as the Linux* OS Installation Destination .  | 35 |
| Table 9-5. No Error Message When Trying to Change Consistency Policy to ppl on Intel®<br>VROC RAID 1 .....                                 | 35 |
| Table 10-1. Degraded RAID Volume is Not Visible During System Boot.....  | 36 |
| Table 10-2. tSATA Controller is Not Visible in Some Linux* Distributions .....   | 36 |
| Table 10-3. Online Capacity Expansion (OLCE) on OS RAID Volume May Not Work in<br>SLES15 SP4 .....   | 36 |
| Table 10-4. It Takes Very Long Time to Create a Linux* Filesystem with TRIM Feature<br>Enabled Onto Intel® VROC Linux* RAID 10 Volume..... | 37 |
| Table 10-5. RAID Reshape Does not Continue After System Reboots.....   | 37 |
| Table 10-6. <i>FailSpare</i> Event is Not Logged in Syslog .....   | 37 |
| Table 10-7. <i>mdadm</i> is Unable to Remove the Hot-Removed Drive During RAID 10<br>Resyncing Sporadically .....                          | 37 |
| Table 10-8. LVM Creation Failed on Intel® VROC RAID .....  | 38 |
| Table 10-9. <i>mdadm</i> May Sometimes Fail to Stop RAID Volume Completely .....   | 38 |
| Table 10-10. <i>iostat</i> Command May Report 0 Statistics For <i>md</i> Devices .....   | 38 |
| Table 10-11. Failed Array is Not Automatically Stopped and Unmounted.....  | 38 |
| Table 10-12. Spare Drive is Recognized During SLES Installation.....   | 39 |
| Table 10-13. NVMe RAID Member Device Does not Disappear from RAID Volume After<br>Hot Remove When Native NVMe Multipathing is Enabled..... | 39 |
| Table 10-14. Rename RAID volume With Special Characters Results in An Unexpected<br>Device Name in the <i>/dev/md</i> DIRECTORY .....      | 39 |
| Table 10-15. Actual RAID Volume Capacity After OLCE Expansion to Maximum is 4MiB<br>Smaller than Expected .....                            | 40 |
| Table 10-16. Unexpected Metadata Update When RAID Level Migration From 0 To 10 is<br>Failed.....   | 40 |
| Table 10-17. RAID Resync Progress After System Reboots Becomes Smaller than the<br>Number Before System Reboots .....                      | 40 |
| Table 10-18. Failed RAID Volume is Still Available in the Intel® Matrix RAID Array ....  | 40 |

## Revision History

| Revision | Description                             | Revision Date |
|----------|---|---------------|
| 001      | Initial public release                  | July 2023     |
| 002      | Updates for Intel® VROC 8.2 Release     | August 2023   |
| 003      | Updates for Intel® VROC 8.6 Release     | March 2024    |
| 004      | Updates for tSATA support in Ubuntu*    | May 2024      |
| 005      | Updates for Intel® VROC 9.0 Release     | June 2024     |
| 006      | Updates for Intel® VROC 9.1/9.2 Release | July 2025     |



# 1 Introduction

---

## 1.1 Overview

The Intel® Virtual RAID on CPU (Intel® VROC) Linux\* 9.0/9.x release is a family of products that provides enterprise RAID solutions targeted for the Intel® Xeon® 6 Processor Family based platforms (code name: *Sierra Forest and Granite Rapids*) that support the Intel® Volume Management Device (Intel® VMD) technology. The product family includes the following products:

1. Intel® VROC (VMD NVMe RAID) Linux\* – This product provides an enterprise RAID solution on platforms that support the Intel® VMD technology. This functionality is developed for and incorporated within Linux\* MDRAID.
2. Intel® VROC (SATA RAID) Linux\* – This product provides an enterprise RAID solution for SATA devices connected to the SATA controllers on the Intel® Platform Control Hub (Intel® PCH) configured for RAID mode. This functionality is developed for and incorporated within Linux\* MDRAID.

These products can be used independently. For example (unless otherwise restricted by the platform itself), Intel® VMD is not required to be enabled to use Intel® VROC (SATA RAID) Linux\*. Likewise, Intel® VROC (VMD NVMe RAID) Linux\* can be enabled and used without Intel® VROC (SATA RAID) Linux\*.

## 1.2 Terminology

**Table 1-1. Terminology**

| Term      | Description  |
|-----------|--|
| API       | Application Programming Interface  |
| BIOS      | Basic Input/Output System  |
| Array     | This term is representative of a <i>mdadm</i> container required for Intel® metadata-based volumes using the IMSM option during volume creation. |
| Container | A container is a type of array used with Intel® metadata or other non-native metadata.   |
| GB        | Gigabyte   |
| GiB       | Gibibyte (1024 x 1024 x 1024 bytes)  |
| GA        | General Access – Operating System release package fully validated by Red Hat Linux*.   |
| HII       | Human Interface Infrastructure   |
| Hot-Plug  | The unannounced removal and insertion of a drive while the system is powered on.   |
| I/O       | Input/Output   |

| Term                             | Description  |
|----------------------------------|--|
| Initramfs                        | Initial RAM File System  |
| IMSM                             | Intel® Matrix Storage Manager  |
| KB                               | Kilobyte   |
| KiB                              | Kibibyte (1024 bytes)  |
| Left-Symmetric                   | Default layout scheme for RAID 5 configurations. Not supported with IMSM metadata  |
| Left-Asymmetric                  | Parity bit layout scheme used in RAID 5 configurations.  |
| Matrix RAID                      | Two different RAID volumes within a single RAID array container.   |
| MB                               | Megabyte   |
| MiB                              | Mebibyte (1024 x 1024 bytes)   |
| MD                               | Linux* kernel Multiple Device driver   |
| Member                           | A SATA or NVMe drive used within a RAID array.   |
| Mdadm                            | <i>mdadm</i> is a Linux* utility developed to manage software RAID devices on Linux*. It is available under the GPL license version 2 or later and supports SATA and NVMe SSDs.  |
| NVMe                             | Non-Volatile Memory Express  |
| OS                               | Operating System   |
| OSV                              | Operating System Vendor (e.g., Red Hat, SUSE)  |
| Pre-OS                           | A BIOS component to configure Intel® VROC RAID.  |
| PV                               | Production Version   |
| RAID                             | Redundant Array of Independent Disks. Allows data to be distributed across multiple drives to provide data redundancy or to enhance data storage performance.  |
| RAID 0 (striping)                | The data in the RAID volume is striped across the array's members. Striping divides data into units and distributes those units across the members without creating data redundancy but improving read/write performance.  |
| RAID 1 (mirroring)               | The data in the RAID volume is mirrored across the RAID array's members. Mirroring is the term used to describe the key feature of RAID 1, which writes duplicate data from one drive to another; therefore, creating data redundancy and increasing fault tolerance.  |
| RAID 5 (striping with parity)    | The data in the RAID volume and parity are striped across the array's members. Parity information is written with the data in a rotating sequence across the members of the array. This RAID level is a preferred configuration for efficiency, fault-tolerance, and performance.  |
| RAID 10 (striping and mirroring) | The RAID level where information is striped across a two drive arrays for system performance. Each of the drive in the array has a mirror for fault tolerance. RAID 10 provides the performance benefits of RAID 0 and the redundancy of RAID 1. However, it requires four hard drives so it's the least cost effective. |
| RAID Array                       | A logical grouping of physical drives.   |

| Term                  | Description  |
|-----------------------|--|
| RAID Volume           | A fixed amount of space across a RAID array that appears as a single physical drive to the operating system. Each RAID volume is created with a specific RAID level to provide data redundancy or to enhance data storage performance. |
| Recovery Drive        | The drive that is the designated target drive in a recovery volume.  |
| Hot Spare Drive       | Hot spare drive is a disk or group of disks used to automatically or manually, depending upon the hot spare policy, replace a failing or failed disk in a RAID configuration.  |
| RHEL                  | Red Hat Enterprise Linux*  |
| Intel® RSTe           | Intel® Rapid Storage Technology enterprise.  |
| RWH                   | It stands for RAID 5 Write Hole and can cause data integrity issue.  |
| SLES                  | SUSE Linux* Enterprise Server  |
| TB                    | Terabyte   |
| TiB                   | Tebibyte (1024 x 1024 x 1024 x 1024 bytes)   |
| UEFI Mode             | Unified Extensible Firmware Interface. Refers to the system setting in the BIOS.   |
| Volume                | This term is representative of <i>mdadm</i> RAID within an Intel® metadata-based container.  |
| Volume initialization | Immediately after a RAID volume has been created, initialization (or resync) commences if the RAID level is 1, 10, or 5 to guarantee volume data integrity.  |
| Intel® VROC           | Intel® Virtual RAID on CPU   |

### 1.3 Reference OEM Platform Documentation

Refer to your OEM for a full list of available feature sets. If any of the information in this document conflicts with the support information provided by the platform OEM, the platform documentation and configurations take precedence.

Customers should always contact the place of purchase or system/software manufacturer with support questions about their specific hardware or software configuration.

### 1.4 Supported Linux\* OS Distributions

The Intel® VROC Linux\* driver and tools are open sourced. Linux\* OSVs are pulling in Intel® VROC features and patches from upstream Linux\* community and integrate into their Linux\* OS distributions. For most of Linux\* OS distributions, the inbox kernel drivers and tools can fully support Intel® VROC functions well and there is no additional software download required. For some Linux\* OS distributions, it requires an out-of-box Intel® VROC Linux\* driver package.

The supported Linux\* OS versions in each Intel® VROC 9.0/9.x release follow the lifecycle of each Linux\* distribution. Follow the guidance from Linux\* OSVs for their Linux\* product's lifecycle.

### 1.4.1 Supported Linux\* Distributions in Intel® VROC 9.2 Release

The release package for Intel® VROC Linux\* 9.2/9.x family of products was designed to work with, tested and validated on the following Linux\* distributions:

- Red Hat Enterprise Linux\* Server:
  - 9.6<sup>1</sup>
- SUSE Linux\* Enterprise Server:
  - 15 SP7<sup>1</sup>
- Ubuntu\* Server:
  - 24.04 LTS<sup>1</sup>

**Note:** <sup>1</sup>There are no additional out-of-box driver packages from Intel. The OS inbox has already been validated and full functional for Intel® VROC. Always reference the latest [Intel® Virtual RAID on CPU \(Intel® VROC\) Supported Configurations](#) for details.

### 1.4.2 Supported Linux\* Distributions in Intel® VROC 9.0 Release

The release package for Intel® VROC Linux\* 9.0 family of products was designed to work with, tested and validated on the following Linux\* distributions:

- Red Hat Enterprise Linux\* Server:
  - 8.8
  - 8.10
  - 9.2
  - 9.4
- SUSE Linux\* Enterprise Server:
  - 15 SP5
  - 15 SP6<sup>1</sup>
- Ubuntu\* Server:
  - 24.04 LTS<sup>1</sup>

<sup>1</sup>There are no additional out-of-box driver packages from Intel. The OS inbox has already been validated and full functional for Intel® VROC. Always reference the latest [Intel® Virtual RAID on CPU \(Intel® VROC\) Supported Configurations](#) for details

### 1.4.3 Supported Linux\* Distributions in Intel® VROC 8.6 Release

The release package for Intel® VROC Linux\* 8.6 family of products was designed to work with, tested and validated on the following Linux\* distributions:

- Red Hat Enterprise Linux\* Server:
  - RHEL\* 8.9<sup>1</sup>
  - RHEL\* 9.3<sup>1</sup>
- Ubuntu\* Server:
  - 22.04.3 LTS<sup>1</sup>

**Note:** <sup>1</sup>There are no additional out-of-box driver packages from Intel. The OS inbox has already been validated and full functional for Intel® VROC. Always reference the latest [Intel® Virtual RAID on CPU \(Intel® VROC\) Supported Configurations](#) for details.

### 1.4.4 Supported Linux\* Distributions in Intel® VROC 8.2 Release

The release package for Intel® VROC Linux\* 8.2 family of products was designed to work with, tested and validated on the following Linux\* distributions:

- Red Hat Enterprise Linux\* Server:
  - RHEL\* 8.7<sup>1</sup>
  - RHEL\* 8.8<sup>1</sup>
  - RHEL\* 9.1<sup>1</sup>
  - RHEL\* 9.2<sup>1</sup>
- SUSE Linux\* Enterprise Server:
  - SLES15 SP5<sup>1</sup>
- Ubuntu\* Server:
  - 20.04.3 LTS

**Note:** <sup>1</sup>There are no additional out-of-box driver packages from Intel. The OS inbox has already been validated and full functional for Intel® VROC. Always reference the latest [Intel® Virtual RAID on CPU \(Intel® VROC\) Supported Configurations](#) for details.

### 1.4.5 Supported Linux\* Distributions in Intel® VROC 8.0 Release

The release package for Intel® VROC Linux\* 8.0 family of products was designed to work with, tested and validated on the following Linux\* distributions:

- Red Hat Enterprise Linux\* Server:
  - RHEL\* 8.2
  - RHEL\* 8.3
  - RHEL\* 8.4
  - RHEL\* 8.5
  - RHEL\* 8.6<sup>1</sup>
  - RHEL\* 9.0<sup>1</sup>
- SUSE Linux\* Enterprise Server:
  - SLES15 SP2
  - SLES15 SP3
  - SLES15 SP4<sup>1</sup>

**Note:** <sup>1</sup>There are no additional out-of-box driver packages from Intel. The OS inbox has already been validated and full functional for Intel® VROC. Always reference the latest [Intel® Virtual RAID on CPU \(Intel® VROC\) Supported Configurations](#) for details.

## 1.5 Supported PCIe NVMe SSDs

Intel® VROC Linux\* supports most shipping enterprise and datacenter NVMe SSDs. For the latest list of supported PCIe NVMe SSDs, refer to the [Intel® Virtual RAID on CPU \(Intel® VROC\) Supported Configurations](#).

Platform providers are now allowed to self-validate their own list of NVMe SSDs for use with Intel® VROC (VMD NVMe RAID). For more details, contact your platform provider.

## **1.6 Intel® SSD Only VROC Upgrade Key**

*Intel SSD Only* keys will no longer be supported on new platforms starting with 4<sup>th</sup> Gen Intel® Xeon® Scalable Processors based platforms. This feature has not been disabled due to legacy platform support. Any issues against 4<sup>th</sup> Gen Intel® Xeon® Scalable Processors based platforms using *Intel® SSD Only* keys will not be supported.



## 2 ***New Features in Intel® VROC 9.0 Release***

---

The Intel® VROC Linux\* 9.0 release package introduces several new features to support the Intel® Xeon® 6 Processor Family as well as improve the user experience. The following sections list the key features introduced in Intel® VROC Linux\* 9.0.

### 2.1 **Support of Intel® VMD 4.0**

Intel® VMD is a hardware logic inside Intel® Xeon® Processor Family. The Intel® Xeon® 6 Processor Family introduces Intel® VMD 4.0, which supports the following key features:

- Up to 128 MSI-X vectors.
- Support for inband PECI configuration access to PCIe SSDs.
- MCTP message routing to/from Intel® VMD-owned devices.
- Up to 6 VMD devices per socket.
- Intel® VROC Out-of-Band Management.

The Intel® VROC Linux\*9.0 release package includes all the Linux\* drivers and tools to enable those features in the Linux\* environment. For details of Intel® VMD 4.0, reference the External Design Specification of the Intel® Xeon® 6 Processors.



## 3 New Features in Intel® VROC 8.0 Release

---

The Intel® VROC Linux\* 8.0 release package introduces several new features to support the 4<sup>th</sup> Gen Intel® Xeon® Scalable Processor Platforms as well as improve the user experience. The following sections list the key features introduced in Intel® VROC Linux\* 8.0.

### 3.1 Support of Intel® VMD 3.0

Intel® VMD is a hardware logic inside Intel® Xeon® Scalable Processor. The 4<sup>th</sup> Gen Intel® Xeon® Scalable Processors introduce Intel® VMD 3.0, which supports the following key features:

- Up to 64 MSI-X vectors.
- Increase in the number of PCI Express lanes that can be controlled by Intel® VMD from 64 to 80.
- Increase in the number of Intel® VMD devices from 5 to 6.
- Intel® VMD Hot Plug support of NVMe devices attached to the Platform Controller Hub (PCH).
- Intel® VROC Out-of-Band Management.

The Intel® VROC Linux\* 8.0 release package includes all the Linux\* drivers and tools to enable those features in Linux\* environment. For details of Intel® VMD 3.0, reference the External Design Specification of the 4<sup>th</sup> Gen Intel® Xeon® Scalable Processors.

### 3.2 Support of 3<sup>rd</sup> SATA Controller

The Intel® VROC Linux\* 8.0 release introduces the support for the 3<sup>rd</sup> SATA controller introduced on Intel® C741 chipset on the 4<sup>th</sup> Gen Intel® Xeon® platforms. The Intel® C741 chipset has three integrated SATA host controllers that support up to twenty ports with data transfer rates of up to 6 Gb/s on all ports. The Intel® VROC Linux\* 8.0 release can support all the three SATA controllers on the platform.

### 3.3 Support of Out-of-Band Management

The Intel® VROC Linux\* 8.0 release introduces the support for Out-of-Band Management on platforms based on the Intel® Eagle Stream Customer Reference Board design. The Intel® VROC Linux\* 8.0 release includes the driver packages that enable the Out-of-Band Management interface which supports NVMe drives and Intel® VROC (VMD NVMe RAID) volumes only. For details, reference the Intel® VROC Linux\* Technical Product Specification.

### **3.4 Support of PCIe\* Hot Plug on PCH**

The Intel® VROC Linux\* 8.0 release introduces the support of the hot plug of NVMe SSDs that are directly attached to the Intel® PCH PCIe lanes managed by Intel® VMD.

### **3.5 Support of Write-Intent Bitmap**

The Intel® VROC Linux\* 8.0 release introduces the support of the write-intent bitmap function. A write-intent bitmap can reduce the RAID rebuild/resync time especially for write-intensive workloads when a dirty shutdown or an unexpected system crash occurs. Write-intent bitmap support is only available for RAID levels with data redundancy. For details of how to use write-intent bitmap with Intel® VROC Linux\* 8.0 release, refer the [Intel® Virtual RAID on CPU \(Intel® VROC\) User Guide for Linux\\*](#).



## 4 Intel® VROC Linux\* Release Package

---

### 4.1 Release Package Contents in Intel® VROC 9.2 Release

The Intel® VROC Linux\* 9.2 release package will not contain the Intel® VROC out-of-box drivers and tools. Use Red Hat and SUSE Linux\* distributions inbox package.

### 4.2 Release Package Contents in Intel® VROC 9.0 Release

The Intel® VROC Linux\* 9.0 release package contains the Intel® VROC out-of-box drivers and tools for the supported Red Hat and SUSE Linux\* distributions.

#### 4.2.1 Release Packages for Red Hat Enterprise Linux\*

As for the supported RHEL Linux\* distributions, a **dd.iso** archive file, which contains rpm packages as well as source code packages, is provided for each supported OS version separately. The **dd.iso** can be loaded during the OS installation phase or installed in the Linux\* environment. Refer to [Chapter 5. Installation of Intel® VROC Linux\\*](#) for detailed steps of installing the Intel® VROC Linux\* out-of-box drivers.

The following is an example of the detailed contents of the **dd.iso** for RHEL\* 9.2. After mounting the **dd.iso** to the designated directory in Linux\*, the user will find the following three RPM packages in the **rpms/x86\_64/** directory. The **kmod-iaavmd-<version>.rpm** is the Intel® VMD kernel replacement driver for RHEL\* 9.2, **ledmon-<version>.rpm** is an updated *ledmon* utility and **mdadm-<version>.rpm** is an updated *mdadm* utility for RHEL\* 9.2. All of them can be installed through the Linux\* command **rpm -Uvh**.

- *ledmon-0.97-20231025.intel.13002832.el9.x86\_64.rpm*
- *mdadm-4.3-20240220.intel.13598375.el9.x86\_64.rpm*

The corresponding source code rpm packages are stored in the **src/** directory:

- *ledmon-0.97-20231025.intel.13002832.el9.src.rpm*
- *mdadm-4.3-20240220.intel.13598375.el9.src.rpm*

```

├── rhdd3
├── rpms
│   └── x86_64
│       ├── ledmon-0.97-20231025.intel.13002832.el9.x86_64.rpm
│       ├── mdadm-4.3-20240220.intel.13598375.el9.x86_64.rpm
│       ├── repodata
│       └── 3d8434ae8e66acac4c38db1cdb258f0df613eaf29d42cacffecf543233dbbb0c-
filelists.xml.gz

```

```

| 66e7f7dfff1048c24675837357089f94586296909b19f2443fa3c2dda88c070d-
other.xml.gz
| 7028ec63abd504a395d70fc98ebe01d7707c8850920908091a84338275f7cd27-
other.sqlite.bz2
| bc2d31c89a32778862a89d1a4e483c4899f4544610cc9c68fc427e986f5c5f0c-
primary.sqlite.bz2
| bec0b577d81959802d33e8191717c3eab0b0ee13ed183bc90a7ef095ed1aaad4-
primary.xml.gz
| f37d911e26da2f3d3b04a2cd38296dbbf4bfff8fe424a5be5c50f42e8fe71f50c-
filelists.sqlite.bz2
| repomd.xml
└─ src
   └─ ledmon-0.97-20231025.intel.13002832.el9.src.rpm
      └─ mdadm-4.3-20240220.intel.13598375.el9.src.rpm

```

### 4.2.2 Release Packages for SUSE Linux\* Enterprise Server

As for the supported SUSE Linux\* distributions, two RPM packages are provided for each supported OS version.

The following is an example of the detailed contents of Intel® VROC Linux\* 9.0 out-of-box packages for SLES 15 SP5. `ledmon-<version>.rpm` and `mdadm-<version>.rpm` are two RPM files for the updated `ledmon` and `mdadm` utilities. Both of them can be installed through the Linux\* command `rpm -Uvh`.

- `ledmon-0.97-20231220.intel.13307073.sle15SP5.x86_64.rpm`
- `ledmon-0.97-20231220.intel.13307073.sle15SP5.x86_64.rpm`

The corresponding source code rpm packages can be found in the `src/` directory:

- `ledmon-0.97-20231220.intel.13307073.sle15SP5.src.rpm`
- `mdadm-4.3-20240220.intel.13598374.sle15SP5.src.rpm`

## 4.3 Release Package Contents in Intel® VROC 8.6 Release

There is no out-of-box driver package specifically for Intel® VROC 8.6 release. All the supported Linux\* distributions have fully inbox support of Intel® VROC.

## 4.4 Release Package Contents in Intel® VROC 8.2 Release

The Intel® VROC Linux\* 8.2 release package contains the Intel® VROC out-of-box drivers and tools for Ubuntu\* Server 20.04.3 LTS.

### 4.4.1 Release Packages for Ubuntu\* Server 20.04.3 LTS

The Intel® VROC Linux\* 8.2 release package for Ubuntu\* Server 20.04.3 LTS contains the following two deb files and two source code tarballs in the `src/` directory.

```

└─ mdadm_4.2-intel.1.11978297.ub20_amd64.deb
└─ ledmon_0.95-intel.1.11992759.ub20_amd64.deb

```

```
└─ src
   ├── mdadm_4.2.src.tar.gz
   └── ledmon_0.95.src.tar.gz
```

## 4.5 Release Package Contents in Intel® VROC 8.0 Release

The Intel® VROC Linux\* 8.0 release package contains the Intel® VROC out-of-box drivers and tools for the supported Red Hat and SUSE Linux\* distributions.

### 4.5.1 Release Packages for Red Hat Enterprise Linux\*

As for the supported RHEL Linux\* distributions, a **dd.iso** archive file, which contains rpm packages as well as source code packages, is provided for each supported OS version separately. The **dd.iso** can be loaded during the OS installation phase or installed in the Linux\* environment. Refer to [Chapter 5. Installation of Intel® VROC Linux\\*](#) for detailed steps of installing the Intel® VROC Linux\* 8.0 out-of-box drivers.

The following is an example of the detailed contents of the **dd.iso** for RHEL\* 8.2. After mounting the **dd.iso** to the designated directory in Linux\*, the user will find the following three RPM packages in the **rpms/x86\_64/** directory. The **kmod-iavmd-<version>.rpm** is the Intel® VMD kernel replacement driver for RHEL\* 8.2, **ledmon-<version>.rpm** is an updated *ledmon* utility and **mdadm-<version>.rpm** is an updated *mdadm* utility for RHEL\* 8.2. All of them can be installed through the Linux\* command **rpm -Uvh**.

- *kmod-iavmd-1.0.0.1569-rhel\_82.x86\_64.rpm*
- *ledmon-0.95-1.intel.7468292.el8.x86\_64.rpm*
- *mdadm-4.2-1.intel.9009306.el8.x86\_64.rpm*

The corresponding source code rpm packages are stored in the **src/** directory:

- *iavmd-1.0.0.1569-rhel\_82.src.rpm*
- *ledmon-0.95-1.intel.7468292.el8.src.rpm*
- *mdadm-4.2-1.intel.9009306.el8.src.rpm*

```
└─ rhdd3
   └─ rpms
      └─ x86_64
         ├── kmod-iavmd-1.0.0.1569-rhel_82.x86_64.rpm
         ├── ledmon-0.95-1.intel.7468292.el8.x86_64.rpm
         ├── mdadm-4.2-1.intel.9009306.el8.x86_64.rpm
         └─ repodata
            ├── 22cf7d53426078db1d7cbf38aa1879cac3edc5fc7f0d6f4e8954a837a50d57e8-
            │ primary.xml.gz
            ├── 3e9b679754a7f20f44d2cbbabee9bc7af6bb9bb2f2cdf23de5f3926495d9da21-
            │ other.sqlite.bz2
            ├── 77c92a0cd607471c51ef5e1f6f87338a4bc83ec0a883063b124acf0cd385d5e0-
            │ primary.sqlite.bz2
            ├── bda60334ca49c9c1e2e4a82b5b28b8c6de275aac8ccd24111b3ca7c14045b0d8-
            │ other.xml.gz
            └─ d7cc3a4397a00a9dcb5917a3d1820c0f9822683db8b01ad18160fa470fd3a730-
            filelists.sqlite.bz2
```

```

|----- e0903f2b57b0ff315861c2180e8d0b3e684e72f1b67e770126d9021399028c70-
filelists.xml.gz
|----- repomd.xml
|
|----- src
|----- iavmd-1.0.0.1569-rhel_82.src.rpm
|----- ledmon-0.95-1.intel.7468292.el8.src.rpm
|----- mdadm-4.2-1.intel.9009306.el8.src.rpm

```

## 4.5.2 Release Packages for SUSE Linux\* Enterprise Server

As for the supported SUSE Linux\* distributions, a Driver Update Disk (DUD) ISO file and two RPM packages are provided for each supported OS version.

The following is an example of the detailed contents of Intel® VROC Linux\* 8.0 out-of-box packages for SLES 15 SP2. The `iavmd-<version>-dud.iso` file is a DUD file of the Intel® VMD kernel replacement driver for SLES 15 SP2. This DUD driver can be loaded and installed during the OS installation phase. `ledmon-<version>.rpm` and `mdadm-<version>.rpm` are two RPM files for the updated `ledmon` and `mdadm` utilities. All of them can be installed through the Linux\* command `rpm -Uvh`.

- `iavmd-1.0.0.1602-sles15_sp2-dud.iso`
- `ledmon-0.95-1.intel.7484205.sle15.x86_64.rpm`
- `mdadm-4.2-1.intel.9009857.sle15SP2.x86_64.rpm`

The corresponding source code rpm packages are stored in the `src/` directory:

- `ledmon-0.95-1.intel.7484205.sle15.src.rpm`
- `mdadm-4.2-1.intel.9009857.sle15SP2.src.rpm`

## 4.6 Release Packages for Out-of-Band Management in Linux\*

### 4.6.1 Release Packages in Intel® VROC 8.2 Release

The Intel® VROC Linux\* 8.2 release for Out-of-Band (OOB) Management contains the updated OOB driver packages for all the Intel® VROC supported Linux\* distributions for the 4<sup>th</sup> Generation Intel® Xeon® Scalable Processor based platforms.

The packages for Out-of-Band Management in Linux\* are stored in a zip file named `OOB_8.2.0.1031.zip`. Two RPM files are provided for each supported Red Hat and SUSE Linux\* distribution. One DEB file and one tarball file are provided for the supported Ubuntu\* Server 20.04.3 LTS.

The following is an example of the two RPM files for Intel® VROC Out-of-Band Management in RHEL 8.x Linux\* distributions. The `oob-0.1-OOB_<version>.x86_64.rpm` is the RPM for OOB daemon program running in the host Linux\* environment. The `oob-0.1-OOB_<version>.src.rpm` is the source code of the OOB daemon program.

- `oob-0.1-OOB_8.2.0.1031.el8.x86_64.rpm`
- `oob-0.1-OOB_8.2.0.1031.el8.src.rpm`

**Note:** Intel® VROC Out-of-Band Management should be implemented and used together with OEM platforms' hardware/firmware design and implementation.

## 4.6.2 Release Packages in Intel® VROC 8.0 Release

The Intel® VROC Linux\* 8.0 release introduces the support for Out-of-Band (OOB) Management on platforms based on the Intel® Eagle Stream Customer Reference Board design. The Intel® VROC Linux\* 8.0 release includes the driver packages that enable the Out-of-Band Management interface which supports NVMe drives and Intel® VROC (VMD NVMe RAID) volumes in the Linux\* environment.

The packages for Out-of-Band Management in Linux\* are stored in a separated folder named *Out-of-Band (OOB)\_Release\_for\_Linux*. Two RPM files are provided for each supported Linux\* distribution.

The following is an example of the two RPM files for Intel® VROC Out-of-Band Management in RHEL\* 8 Linux\* distributions. The `oob-0.1-00B_<version>.x86_64.rpm` is the RPM for OOB daemon program running in the host Linux\* environment. The `oob-0.1-00B_<version>.src.rpm` is the source code of the OOB daemon program.

- `oob-0.1-00B_1.0.0.1298.el8.x86_64.rpm`
- `oob-0.1-00B_1.0.0.1298.el8.src.rpm`

**Note:** Intel® VROC Out-of-Band Management should be implemented and used together with OEM platforms' hardware/firmware design and implementation.



## 5 Installation of Intel® VROC Linux\*

This chapter outlines installing of Intel® VROC Linux\* out-of-box package as well as configuring the inbox Intel® VROC components in the Intel® VROC supported Linux\* distributions.

### 5.1 Installation of Intel® VROC Linux\* Update Packages

For some certain Linux\* distributions, Intel may release out-of-box update packages to support a fully functional Intel® VROC product. This section illustrates how to install the Intel® VROC Linux\* out-of-box packages in Red Hat Enterprise Linux\* Distributions.

#### 5.1.1 Installing Intel® VMD Replacement Driver During OS Installation

The Intel® VMD replacement driver is included in the Intel® VROC out-of-box package. This replacement driver is used to replace the OS kernel inbox VMD driver to enable or improve Intel® VROC functionalities on certain Intel® Xeon® platforms.

The Intel® VMD replacement driver can be installed during the OS installation phase or in the OS environment. The following steps illustrate how to install the Intel® VMD replacement driver during OS installation.

1. Prepare USB drives with the RHEL\* installation ISO and the Intel® VROC out-of-box driver ISO package.

Use the `dd` command to create a USB drive with the RHEL\* ISO installation:

```
# dd if=/path/to/<RHEL_OS>.iso of=/dev/sdX status=progress
```

Use the `dd` command to create a USB drive with the Intel® VROC out-of-box ISO package:


```
# dd if=/path/to/<vroc_update_driver>.iso of=/dev/sdX status=progress
```

After the USB drive with the Intel® VROC driver is prepared, make sure it has the correct label name `OEMDRV`:


```
# lsblk -o name,label
NAME          LABEL
sdb           OEMDRV
```

2. Boot your system with the bootable media created in the above step. When the system boots, we will get the below installation screen. Select the option **Install Red Hat Enterprise Linux 8.5** and press <E>.


**Installation of Intel® VROC Linux\***

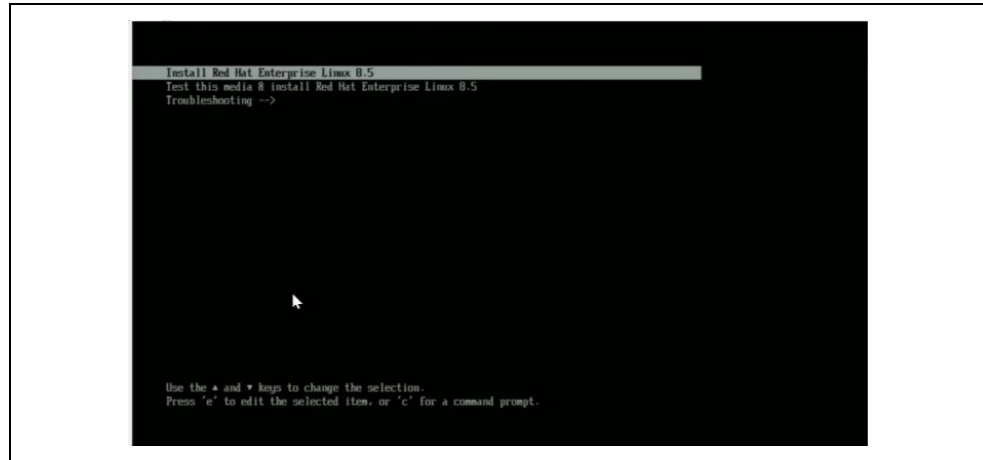

3. Add the line `inst.dd initcall_blacklist=vmd_drv_init` in the end of the kernel boot cmdline. Press `Ctrl + X` to continue with the installation process.

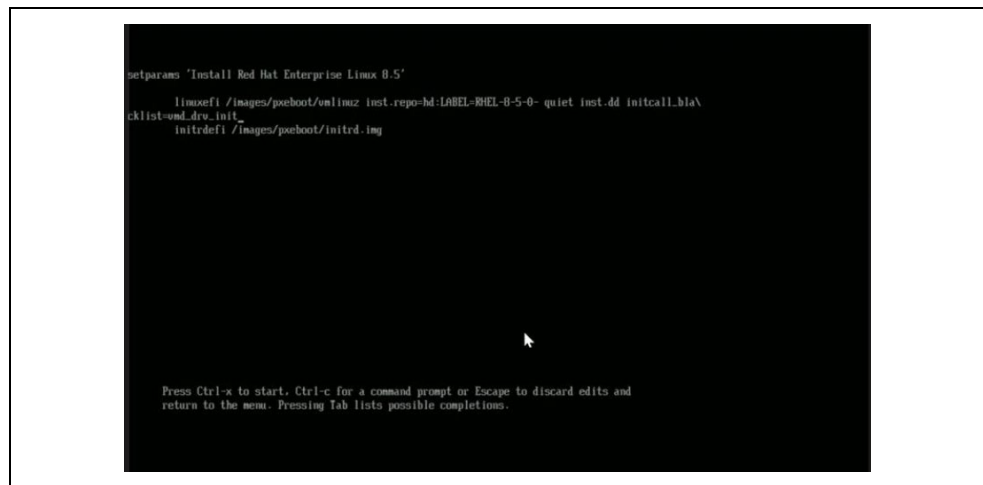

4. Select the driver with label `OEMRDV` in this example. If you don't see the USB device which is named as `E`, input `<r>` to reflash again.

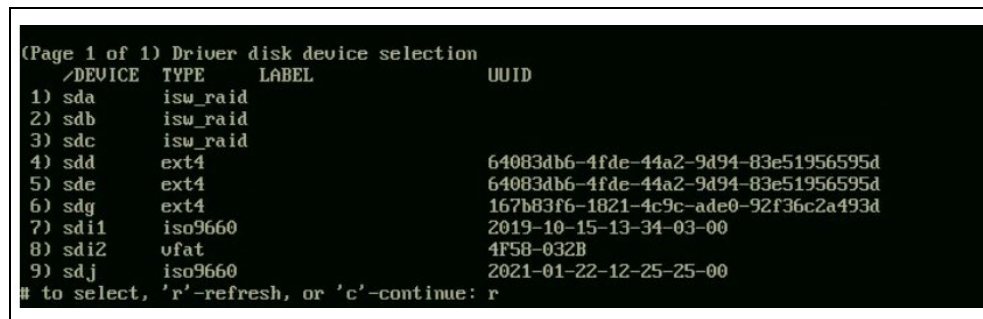

After refresh, select device with label `E`.

```
(Page 1 of 1) Driver disk device selection
/DEVICE TYPE LABEL UUID
1) sda1 vfat 37B2-2185
2) sda2 xfs a9c327df-f995-4c70-a24d-4ecbcfe32c55
3) sda3 LVM2_mem 62E7xq-GNRF-NG3N-NU20-ohn1-NjQg-AJur
4) sdd1 vfat OEMDRV 82FA-6DEC
5) sde1 vfat RHEL-8-5-0- 3034-DB68
6) loop0 squashfs
7) loop1 ext4 15efe4fe-4679-441b-a6eb-63c564170875
8) dm-0 ext4 15efe4fe-4679-441b-a6eb-63c564170875
9) dm-1 ext4 15efe4fe-4679-441b-a6eb-63c564170875
# to select, 'r'-refresh, or 'c'-continue: 4
DD: Examining /dev/sdd1
```

- Toggle the `kmod-iaumd` package, then input <c> to continue to the main menu.

```
(Page 1 of 1) Choose driver disk ISO file
1) /media/DD-3/dd.iso
# to select, or 'c'-continue: 1
DD: Examining /media/DD-3/dd.iso
mount: /media/DD-4: WARNING: device write-protected, mounted read-only.

(Page 1 of 1) Select drivers to install
1) [ ] /media/DD-4/rpms/x86_64/kmod-iaumd-1.0.0.1600-rhel_85.x86_64.rpm
# to toggle selection, or 'c'-continue: 1

(Page 1 of 1) Select drivers to install
1) [x] /media/DD-4/rpms/x86_64/kmod-iaumd-1.0.0.1600-rhel_85.x86_64.rpm
# to toggle selection, or 'c'-continue: c
DD: Extracting: kmod-iaumd
```


- At the main menu, type <c> to continue with the installation.

```
DD: Extracting: kmod-iaumd


(Page 1 of 1) Driver disk device selection
/DEVICE TYPE LABEL UUID
1) sda1 vfat 37B2-2185
2) sda2 xfs a9c327df-f995-4c70-a24d-4ecbcfe32c55
3) sda3 LVM2_mem 62E7xq-GNRF-NG3N-NU20-ohn1-NjQg-AJur
4) sdd1 vfat OEMDRV 82FA-6DEC
5) sde1 vfat RHEL-8-5-0- 3034-DB68
6) loop0 squashfs
7) loop1 ext4 15efe4fe-4679-441b-a6eb-63c564170875
8) dm-0 ext4 15efe4fe-4679-441b-a6eb-63c564170875
9) dm-1 ext4 15efe4fe-4679-441b-a6eb-63c564170875
# to select, 'r'-refresh, or 'c'-continue: c
```

- Follow the normal RHEL\* installer guidance to complete the OS installation.
- A reboot is required after the installation. Add the line `initcall_blacklist=vmd_drv_init` in the boot cmdline before directly booting into the OS. This boot parameter is used to tell the OS to blacklist the inbox VMD driver and load the Intel® VMD replacement driver.

To accomplish this, select the **Red Hat Enterprise Linux\*** option and press <E>.

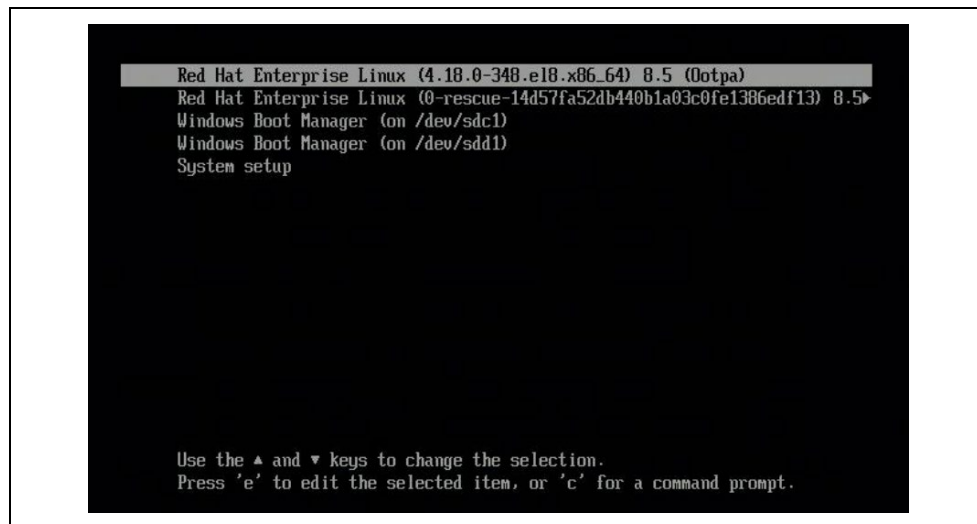

Then add the line `initcall_blacklist=vmd_drv_init` in the Linux\* boot cmdline, and then press Ctrl + X to start.

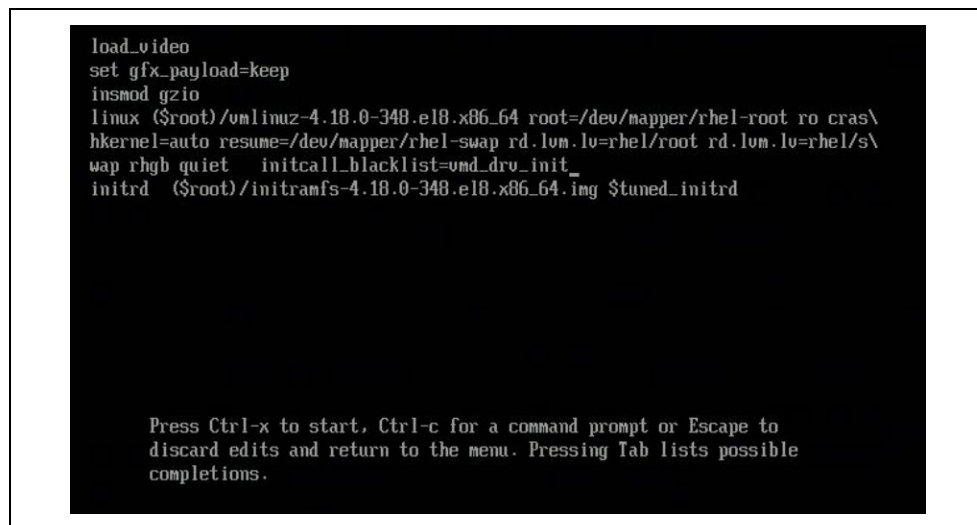

## 5.1.2 Installing Intel® VROC Out-of-Box Drivers in Red Hat Linux\* OS

[Section 4.1.1](#) illustrates the steps to install the Intel® VMD replacement driver during OS installation. This section will cover the steps to install the Intel® VMD replacement driver as well as other Intel® VROC update packages in Linux\* OS.

1. Copy the Intel® VROC update package to the target Linux\* OS and mount the iso to a certain directory. Enter that directory of `rpms/x86_64` and you will typically find three rpm packages as showed in the below example:

```
# ls -l rpms/x86_64/
total 828
-r--r--r--. 1 root root 328776 Apr  4 07:23 kmod-iaavmd-1.0.0.1600-
rhel_85.x86_64.rpm
```

```
-r--r--r--. 1 root root 83860 Apr 4 07:23 ledmon-0.95-1.Intel.7468292.el8.x86_64.rpm
-r--r--r--. 1 root root 431924 Apr 4 07:23 mdadm-4.2-1.Intel.9009306.el8.x86_64.rpm
dr-xr-xr-x. 2 root root 2048 Apr 4 07:23 repodata
```

- Use the command `rpm -Uvh --force` to install all those packages. See the examples below:

This is an example to install the Intel® VMD replacement driver package prefixed by `kmod-iavmd-`:

```
# rpm -Uvh --force kmod-iavmd-1.0.0.1600-rhel_85.x86_64.rpm
warning: kmod-iavmd-1.0.0.1600-rhel_85.x86_64.rpm: Header V4 RSA/SHA256 Signature, key ID c343c1b0: NOKEY
Verifying... ##### [100%]
Preparing... ##### [100%]
Updating / installing...
 1:kmod-iavmd-1.0.0.1600-rhel_85 ##### [100%]
```

Check the rpm installation status by running the following command:

```
# rpm -qa | grep kmod-iavmd
kmod-iavmd-1.0.0.1600-rhel_85.x86_64
```

This is an example to install Intel® VROC Linux\* update package for `mdadm` utility:

```
# rpm -Uvh --force mdadm-4.2-1.Intel.9009306.el8.x86_64.rpm
warning: mdadm-4.2-1.Intel.9009306.el8.x86_64.rpm: Header V4 RSA/SHA256 Signature, key ID b7accecb: NOKEY
Verifying... ##### [100%]
Preparing... ##### [100%]
Updating / installing...
 1:mdadm-4.2-1.Intel.9009306.el8 ##### [100%]
```

Check the rpm installation status by running the following command:

```
# mdadm --version
mdadm - v4.2 - 2021-12-30 - Intel_Build: 1.Intel.9009306.el8
```

This is an example to install Intel® VROC Linux\* update package for `ledmon` utility:

```
# rpm -Uvh --force ledmon-0.95-1.Intel.7468292.el8.x86_64.rpm
warning: ledmon-0.95-1.Intel.7468292.el8.x86_64.rpm: Header V4 RSA/SHA256 Signature, key ID b7accecb: NOKEY
Verifying... ##### [100%]
Preparing... ##### [100%]
Updating / installing...
 1:ledmon-0.95-1.Intel.7468292.el8 ##### [100%]
```

Check the rpm installation status by following command:

```
# ledmon --version
Intel(R) Enclosure LED Monitor Service 0.95
Copyright (C) 2009-2021 Intel Corporation.

This is free software; see the source for copying conditions. There is NO
warranty;
not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

ledmon[41052] : exit status is STATUS_SUCCESS.
```

- Update the GRUB configuration file to permanently add the following kernel boot parameter to allow the OS to automatically load the Intel® VMD replacement driver instead of the inbox one:

```
initcall_blacklist=vmd_drv_init
```

To achieve that, edit the `/etc/default/grub` file, and add the line `initcall_blacklist=vmd_drv_init` to the end of the `GRUB_CMDLINE_LINUX` line. Take the following as an example:

```
# vim /etc/default/grub
```

```
GRUB_CMDLINE_LINUX="crashkernel=auto resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root rd.lvm.lv=rhel/swap rhgb quiet
initcall_blacklist=vmd_drv_init"
```

After editing the above `/etc/default/grub` file, regenerate the GRUB configuration file by running the following command:

```
# grub2-mkconfig -o /boot/efi/EFI/redhat/grub.cfg
```

### 5.1.3 Installing Intel® VROC Out-of-Box Drivers in Ubuntu\* Server 20.04.3 LTS

`dpkg` is the package management tool in Ubuntu\*. Use the following command to install the Intel® VROC Linux\* 8.2 release out-of-box drivers for Ubuntu\* Server 20.04.3 LTS.

1. Install the `mdadm` update package.

```
# dpkg -i mdadm_4.2-intel.1.11978297.ub20_amd64.deb
Selecting previously unselected package mdadm.
(Reading database ... 109196 files and directories currently installed.)
Preparing to unpack mdadm_4.2-intel.1.11978297.ub20_amd64.deb ...
Unpacking mdadm (4.2-intel.1.11978297.ub20) ...
Setting up mdadm (4.2-intel.1.11978297.ub20) ...
Generating mdadm.conf... done.
update-initramfs: deferring update (trigger activated)
Sourcing file `/etc/default/grub'
Sourcing file `/etc/default/grub.d/init-select.cfg'
Generating grub configuration file ...
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69464:
grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69464:
grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69519:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69519:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69534:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69534:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69549:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69549:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69564:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69564:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69636:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69636:
/usr/sbin/grub-probe
Found linux image: /boot/vmlinuz-5.4.0-156-generic
Found initrd image: /boot/initrd.img-5.4.0-156-generic
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69721:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69721:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69737:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69737:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69752:
/usr/sbin/grub-probe
```

```
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69752:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69767:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69767:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69939:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on vgs invocation. Parent PID 69939:
/usr/sbin/grub-probe
File descriptor 3 (pipe:[180652]) leaked on lvs invocation. Parent PID 70162:
/bin/sh
Adding boot menu entry for UEFI Firmware Settings
done
Created symlink /etc/systemd/system/mdmonitor.service.wants/mdcheck_continue.timer
→ /lib/systemd/system/mdcheck_continue.timer.
Created symlink /etc/systemd/system/mdmonitor.service.wants/mdcheck_start.timer →
/lib/systemd/system/mdcheck_start.timer.
Created symlink /etc/systemd/system/mdmonitor.service.wants/mdmonitor-
oneshot.timer → /lib/systemd/system/mdmonitor-oneshot.timer.
Processing triggers for man-db (2.9.1-1) ...
Processing triggers for initramfs-tools (0.136ubuntu6.6) ...
update-initramfs: Generating /boot/initrd.img-5.4.0-156-generic
W: Possible missing firmware /lib/firmware/ast_dp501_fw.bin for module ast
```

2. Install the *ledmon* update package.

```
# dpkg -i ledmon_0.95-intel.1.11992759.ub20_amd64.deb
Selecting previously unselected package ledmon.
(Reading database ... 109185 files and directories currently installed.)
Preparing to unpack ledmon_0.95-intel.1.11992759.ub20_amd64.deb ...
Unpacking ledmon (0.95-intel.1.11992759.ub20) ...
Setting up ledmon (0.95-intel.1.11992759.ub20) ...
Created symlink /etc/systemd/system/multi-user.target.wants/ledmon.service →
/lib/systemd/system/ledmon.service.
Processing triggers for systemd (245.4-4ubuntu3.20) ...
Processing triggers for man-db (2.9.1-1) ...
```

## 5.2 Configuring Intel® VROC in Linux\* Distributions with Inbox Support

### 5.2.1 Configuring Intel® VROC in Red Hat Enterprise Linux\*

#### 5.2.1.1 Enabling *ledmon* Service

By default, the *ledmon* service is disabled in Red Hat Enterprise Linux\* distribution. The user should enable it and get it started by running the following command:

```
# systemctl enable --now ledmon.service
```

Check the *ledmon* service status by running the following command:

```
# systemctl status ledmon.service
```

## 5.2.2 Configuring Intel® VROC in SUSE Linux\* Enterprise Server (SLES) 15

### 5.2.2.1 Installing SLES 15 SP2 onto Intel® VROC RAID

The SLES 15 SP2 installer by default is not able to assemble a RAID volume created in the PreOS/UEFI. When installing SLES 15 SP2 onto an Intel® VROC RAID volume, a boot command line `autoassembly=1` should be added to enable RAID assembly in the installer.

### 5.2.2.2 Installing *ledmon* in SLES Family

SLES 15 family Linux\* distributions don't include the *ledmon* package in the base OS installation. The user should install *ledmon* manually after the OS installation. Use the following command to install *ledmon*:

```
# zypper install ledmon
```

### 5.2.2.3 Enabling *ledmon* Service

By default, the *ledmon* service is disabled in SLES Linux\* distributions. The user should enable it and get it started by running the following command:

```
# systemctl enable --now ledmon.service
```

Check the *ledmon* service status by running the following command:

```
# systemctl status ledmon.service
```



## 6 Intel® VROC Linux\* Limitations

### 6.1 Missing of 3<sup>rd</sup> SATA Controller Device ID

The Intel® VROC Linux\* 8.0 release introduces the support for the 3<sup>rd</sup> SATA controller introduced on the Intel® C741 chipset on the 4<sup>th</sup> Gen Intel® Xeon® Scalable Processor Platforms. In some of the Linux\* distributions the Intel® VROC Linux\* 8.x release supports, the device ID of the 3<sup>rd</sup> SATA controller is by default not included in the inbox Linux\* AHCI driver. As a result, the 3<sup>rd</sup> SATA controller is not functional in those Linux\* distributions. The following table lists the Linux\* distributions with and without 3<sup>rd</sup> SATA controller support by default.

As a workaround, the following command can be used to manually add the device ID of the 3<sup>rd</sup> SATA controller to those Linux\* distributions without the default support:

```
"echo "8086 282f" > /sys/bus/pci/drivers/ahci/new_id"
```

**Table 5-1. 3<sup>rd</sup> SATA Controller Dev ID support**

| Linux* Distribution | 3 <sup>rd</sup> SATA Controller Dev ID in the Inbox Linux* AHCI Driver |
|---------------------|--|
| RHEL* 8.2           | No   |
| RHEL* 8.3           | No   |
| RHEL* 8.4           | No   |
| RHEL* 8.5           | No   |
| RHEL* 8.6           | Yes  |
| RHEL* 9.0           | Yes  |
| SLES 15 SP2         | No   |
| SLES 15 SP3         | Yes  |
| SLES 15 SP4         | Yes  |
| Ubuntu* 20.04.3     | No   |
| Ubuntu* 22.04.3     | No   |

### 6.2 Notice of Using Intel® VROC in RHEL\* 9.0

The Red Hat Enterprise Linux\* 9.0 GA release has the inbox support of Intel® VROC Linux\* 8.0. Some known issues were reported in the RHEL\* 9.0 GA release and resolved in the latest installation image and Red Hat errata. In order to successfully use Intel® VROC in RHEL\* 9.0, the following actions should be taken:

1. Download the latest RHEL\* 9.0 installation image from the Red Hat Customer Portal. The latest RHEL\* 9.0 ISO image files were last modified on January 30<sup>th</sup>, 2023.
2. Apply an update for *kernel* from [RHSA-2023:4137 - Security Advisory](#).
3. Apply an update for *systemd* from [RHBA-2022:6604 - Bug Fix Advisory](#).

4. Reboot the system.

The following table lists the known issues found in RHEL\* 9.0 and resolved in the latest ISO installation image and Red Hat product errata.

**Table 5-2. Known Issues Resolved in RHEL\* 9.0 with Errata**

| Title   | Internal/External Reference ID | Resolution   |
|---|--------------------------------|--|
| RHEL* 9.0 doesn't boot when VMD and interrupt remapping are enabled | 22015103377 / 2084146          | Resolved in the updated RHEL* 9.0 ISO installation image |
| RHEL* 9.0 doesn't support 3rd SATA Controller                       | 22015103390 / 2099740          | Resolved in the updated RHEL* 9.0 ISO installation image |
| Reboot hangs after RHEL* 9.0 installing on Intel® VROC RAID         | 22015093219 / 2047682          | Resolved in <a href="#">RHBA-2022:6604</a> errata        |
| Auto rebuild issue during fio write                                 | 22015156993 / 2092914          | Resolved in <a href="#">RHSA-2023:4137</a> errata        |

## 6.3 Linux\* OS May Not Properly Boot/Install from A Degraded RAID Volume

This is a known limitation in current Intel® VROC Linux\* design. If a RAID member drive is failed/removed during Linux\* OS booting phase, the RAID volume is not able to be assembled properly. As a result, Linux\* booting or installation onto that RAID volume may fail. Rebooting the system will resolve this issue.

## 6.4 Linux\* native NVMe multipath supporting and capability

Linux\* native NVMe multipathing was first introduced in kernel v4.15, as an efficient and native implementation in the kernel NVMe driver. Linux\* NVMe multipathing provides path failover and path load sharing for multipath-capable NVMe drives.

In some of the Linux\* distributions (e.g., RHEL 9.x, SLES 15), the native NVMe multipathing is enabled by default.

Intel VROC Linux product revisions older than Intel VROC Linux version 9.1 do not support the Linux\* native NVMe multipathing feature. Enabling the Linux\* native NVMe multipathing feature will cause Intel® VROC functions (e.g., LED management, OOB management) to not function properly under Linux\*, and Intel recommends disabling Linux native NVMe multipathing by adding the **nvme\_core.multipath=N** option to the kernel command line when using these Intel VROC Linux product revisions.

Starting from Intel VROC Linux product revision 9.1, Intel® VROC Linux products still do not support Linux multipath features, but the core Intel VROC Linux product functions will now work properly when using NVMe drives with multipath enabled. The Intel® VROC Linux product treats multipath drives as single-path drives.

Multipath drive support in the Intel® VROC Linux product is introduced in the following releases of mdadm and ledmon which are listed in the table below. The user can still disable multipathing by adding the **nvme\_core.multipath=N** option to the kernel command line if desired, particularly due to the limitation described in the following paragraph.

**Note:**

1. This feature is not fully tested by Intel® VROC. If the user encounters issue with multipath capable drive, the user can still disable multipathing by adding the "nvme\_core.multipath=N" option to the kernel command line as the workaround.
2. This feature has the limitation described below:  
*Limitation:* Auto rebuild\* and hot insert to the same slot is not supported when using global spare drives which are multipath capable drives with multipath enabled in Linux.  
 \*The auto rebuild case applies to the spare in a container which doesn't include the target volume.

| Source Code | Release  |
|-------------|----------|
| mdadm       | >= 4.2   |
| ledmon      | >= 1.0.0 |

| Base Oses Inbox Support | OS version  |
|-------------------------|---|
| <b>mdadm</b>            |   |
| RHEL                    | >= RHEL 8.5 or >= RHEL 9.0                                |
| SLES                    | >= SLES15 SP4   |
| Ubuntu*                 | >= 22.04  |
| <b>ledmon</b>           |   |
| RHEL                    | >= RHEL 9.5   |
| SLES                    | >= SLES15 SP7<br><b>NOTE:</b> SLES15 SP6 inbox is 0.97    |
| Ubuntu*                 | Not supported<br><b>NOTE:</b> Ubuntu* 24.04 inbox is 0.97 |



# 7 Known Issues in Intel® VROC Linux\* 9.0/9.x

This chapter outlines the issues reported and internally found in the Intel® VROC Linux\* 9.2 release.

**Table 7-1. Fail to reboot after NVMe RAIDs are built in the system**

|                          |   |
|--------------------------|---|
| <b>Title</b>             | Fail to reboot after NVMe RAIDs are built in the system                         |
| <b>Reference ID</b>      | 14024153444   |
| <b>Version</b>           | Ubuntu* 24.04.01/02 LTS   |
| <b>Issue Description</b> | When multiple NVMe RAIDs under VMD enabled, system will be in stuck inexpertly. |
| <b>Workaround</b>        | Not at this time. Request ISV to fix it.  |

This chapter outlines the issues reported and internally found in the Intel® VROC Linux\* 9.0 release.

**Table 7-2. Fail to change LED state in the guest OS**

|                          |   |
|--------------------------|---|
| <b>Title</b>             | Fail to change LED state in the guest OS  |
| <b>Reference ID</b>      | 18038276913   |
| <b>Version</b>           | RHEL* 9.2   |
| <b>Issue Description</b> | When running RHEL* 9.2 in the virtual machine as the guest OS, with Intel VMD direct assign to VM, all the NVMe devices behind Intel VMD can be directly controlled in the guest OS. Trying to use ledctl locate the NVMe drive in the guest OS, the actual LED state is not changed accordingly. |
| <b>Workaround</b>        | Not at this time. Request Intel VMD replacement driver to fix it.   |

**Table 7-3. Fail to hot remove the NVMe device in the guest OS**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | Fail to hot remove the NVMe device in the guest OS   |
| <b>Reference ID</b>      | 18038277012  |
| <b>Version</b>           | RHEL* 9.2  |
| <b>Issue Description</b> | When running RHEL* 9.2 in the virtual machine as the guest OS, with Intel VMD direct assign to VM, all the NVMe devices behind Intel VMD can be directly controlled in the guest OS. Trying to hot remove the NVMe device controlled by Intel VMD in the guest OS, it will fail that the block device still remains in the system. |
| <b>Workaround</b>        | Not at this time. Request Intel VMD replacement driver to fix it.  |



## 8 Known Issues in Intel® VROC Linux\* 8.6

This chapter outlines the issues reported and internally found in the Intel® VROC Linux\* 8.6 release.

**Table 8-1. Fail to Enable/Disable PPL Consistency Policy for RAID5 Volumes**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | Enabling or disabling PPL consistency policy using <code>mdadm --grow</code> command fails in certain Linux* OSs   |
| <b>Reference ID</b>      | 00847088/00866586/15015036181/15015575934  |
| <b>Version</b>           | RHEL* 8.8/8.9, RHEL* 9.2/9.3   |
| <b>Issue Description</b> | When using <code>mdadm --grow</code> command to change ppl/resync consistency policy for RAID5 volume, following error message occurs and consistency policy is not changed successfully.<br>"mdadm: Subarray 0 in /dev/mdxxx is active, cannot update ppl"  |
| <b>Workaround</b>        | Fixed in upstream: " <a href="#">manage: adjust checking subarray state in update subarray</a> ". RHEL* 9.4 and 8.10 will include this fix.<br>Workaround steps: <ul style="list-style-type: none"> <li>• Stop RAID volume.<br/># <code>mdadm --stop /dev/md/&lt;raid_name&gt;</code></li> <li>• Change consistency policy to resync:<br/># <code>mdadm --update-subarray=0 --update=no-ppl /dev/md/&lt;container_name&gt;</code></li> <li>• Assemble RAID volume.<br/># <code>mdadm -As</code></li> </ul> |

**Table 8-2. RAID Migration from RAID1/10 to RAID0 May Fail in Certain Linux\* OS Versions**

|                          |   |
|--------------------------|---|
| <b>Title</b>             | RAID migration from RAID1/10 to RAID0 or grow RAID0 with more devices may fail in certain Linux* OS versions                                    |
| <b>Reference ID</b>      | 15014729285   |
| <b>Version</b>           | RHEL* 8.8/8.9, RHEL* 9.2/9.3, SLES 15 SP5   |
| <b>Issue Description</b> | When performing RAID migration from RAID1 or RAID10 to RAID0, the second step of growing RAID0 raid-devices may not work with no error message. |
| <b>Workaround</b>        | Reboot the OS to make RAID reshape/migration continue.  |

**Table 8-3. Reboot May Hang in Certain Linux\* OS When Being Installed onto a RAID Volume**

|                     |  |
|---------------------|--|
| <b>Title</b>        | Reboot may hang when OS is installed onto a VROC RAID volume |
| <b>Reference ID</b> | 16021003289 / 00810313                                       |

**Known Issues in Intel® VROC Linux\* 8.6**

|                          |  |
|--------------------------|--|
| <b>Version</b>           | SLES 15 SP4/SP5  |
| <b>Issue Description</b> | When rebooting or shutting down the OS by reboot/shutdown command, it may hang up if OS is installed onto a VROC RAID volume.  |
| <b>Workaround</b>        | Follow SUSE's guide to update the systemd package:<br>Recommended update for systemd SUSE-RU-2023:3451-1   SUSE Support   SUSE |



## 9 Known Issues in Intel® VROC Linux\* 8.2

This chapter outlines the issues reported and internally found in the Intel® VROC Linux\* 8.2 release.

**Table 9-1. mdadm – Examine Command May not Report the Correct RAID Volume Size**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | <code>mdadm --examine</code> command may not reports out the exact same RAID volume size which is created and configured in the UEFI   |
| <b>Reference ID</b>      | 18031363804  |
| <b>Version</b>           | Intel® VROC Linux* 8.2   |
| <b>Issue Description</b> | If a RAID volume is created in the UEFI with the designated size, the volume size reported by <code>mdadm --examine</code> command in the Linux* OS may not be exactly the same as the size displayed in UEFI. |
| <b>Workaround</b>        | Not at this time.  |

**Table 9-2. LVM Logical Volume Creation is Failed**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | LVM logical volume creation is failed  |
| <b>Reference ID</b>      | 18031362930  |
| <b>Version</b>           | Ubuntu* 20.04.3 LTS  |
| <b>Issue Description</b> | When creating LVM logical volumes on an Intel® VROC RAID volume, it may report error when doing <code>vgcreate</code> operation.   |
| <b>Workaround</b>        | Known LVM bug. Fixed in LVM 2.03.11 version.<br>Update LVM with following steps: <ol style="list-style-type: none"> <li>1. Make sure <code>focal-backports</code> repository is enabled:                 <ol style="list-style-type: none"> <li>a. <code>sudo apt install lvm2/focal-backports</code></li> </ol> </li> </ol> |

**Table 9-3. Online Capacity Expansion (OCE) May Not Start on the Second RAID Volume of Intel® VROC Matrix RAID**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | Online Capacity Expansion (OCE) may not start on the second RAID volume of Intel® VROC Matrix RAID   |
| <b>Reference ID</b>      | 18031364673  |
| <b>Version</b>           | Intel® VROC Linux* 8.2   |
| <b>Issue Description</b> | Adding a new spare drive to the existing Intel® VROC Matrix RAID array and execute the <code>mdadm --grow</code> command to reshape/resize the matrix RAID array, the OCE may not start on the second RAID volume. |
| <b>Workaround</b>        | Not at this time.  |

**Table 9-4. Spare Drive Cannot be Chosen as the Linux\* OS Installation Destination**

|                          |   |
|--------------------------|---|
| <b>Title</b>             | Spare drive cannot be chosen as the Linux* OS installation destination  |
| <b>Reference ID</b>      | 18032519953   |
| <b>Version</b>           | Ubuntu* 20.04.3 LTS   |
| <b>Issue Description</b> | When choosing the Intel® VROC spare drive as the installation destination when installing Ubuntu* 20.04.3 LTS, an error may occur, and the installation is aborted. |
| <b>Workaround</b>        | Do not use the spare drive as the OS disk   |

**Table 9-5. No Error Message When Trying to Change Consistency Policy to ppl on Intel® VROC RAID 1**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | No error message when trying to change consistency policy to ppl on Intel® VROC RAID 1   |
| <b>Reference ID</b>      | 18031364162  |
| <b>Version</b>           | Ubuntu* 20.04.3 LTS  |
| <b>Issue Description</b> | When trying to change the consistency policy of Intel® VROC RAID 1 to ppl (which is not supported), the <i>mdadm</i> command returns 0 without printing any error message. |
| <b>Workaround</b>        | Fixed in upstream: <a href="#">mdadm: block update=ppl for non raid456 levels</a>  |



# 10 Known Issues in Intel® VROC Linux\* 8.0

This chapter outlines the issues reported and internally found in the Intel® VROC Linux\* 8.0 release.

**Table 10-1. Degraded RAID Volume is Not Visible During System Boot**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | Degraded RAID Volume is not visible during system boot   |
| <b>Reference ID</b>      | 16014892299 / 16014866490  |
| <b>Version</b>           | Intel® VROC Linux* 8.0   |
| <b>Issue Description</b> | If a RAID member drive is failed/removed during the Linux* OS booting phase, the RAID volume is not able to be assembled properly. As a result, Linux* booting or installation onto that RAID volume may fail. |
| <b>Workaround</b>        | Reboot the system.   |

**Table 10-2. tSATA Controller is Not Visible in Some Linux\* Distributions**

|                          |   |
|--------------------------|---|
| <b>Title</b>             | tSATA controller is not visible in some Linux* Distributions  |
| <b>Reference ID</b>      | 18021345328 / 18021071520 / 22014823700   |
| <b>Version</b>           | RHEL* 8.2/8.3/8.4/8.5, SLES 15 SP2  |
| <b>Issue Description</b> | The tSATA device ID is missing in those Linux* distribution, as a result, the tSATA controller is not visible to the user.                      |
| <b>Workaround</b>        | For each OS boot, manually add the tSATA device ID by running the following command:<br># "echo "8086 282f" > /sys/bus/pci/drivers/ahci/new_id" |

**Table 10-3. Online Capacity Expansion (OLCE) on OS RAID Volume May Not Work in SLES15 SP4**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | Online Capacity Expansion (OLCE) on OS RAID volume may not work in SLES15 SP4  |
| <b>Reference ID</b>      | 15011679625 / 22015576556  |
| <b>Version</b>           | SLES15 SP4   |
| <b>Issue Description</b> | When the user tries to do OLCE on the Intel® VROC RAID volume where SLES15 SP4 is installed, the corresponding <i>mdadm</i> grow command will result in malfunction. This issue does not occur on data RAID volumes. |
| <b>Workaround</b>        | Restart the <i>mdmon</i> service by running the following command before doing OLCE:<br># <code>systemctl restart mdmon@md*.service</code>   |

**Table 10-4. It Takes Very Long Time to Create a Linux\* Filesystem with TRIM Feature Enabled Onto Intel® VROC Linux\* RAID 10 Volume**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | It takes very long time to create a Linux* filesystem with TRIM feature enabled onto Intel® VROC Linux* RAID 10 volume   |
| <b>Reference ID</b>      | 18013942972  |
| <b>Version</b>           | RHEL* 8.3/8.4  |
| <b>Issue Description</b> | When creating a filesystem with TRIM feature enabled (e.g. mkfs.ext4) on an Intel® VROC RAID 10 volume, it will take a long time (hours) to complete.  |
| <b>Workaround</b>        | Disable the TRIM feature when using Intel® VROC RAID 10. The following is an example to create an EXT4 filesystem with <i>nodiscard</i> parameter:<br># <code>mkfs.ext4 -E nodiscard /dev/mdXXX</code> |

**Table 10-5. RAID Reshape Does not Continue After System Reboots**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | RAID reshape doesn't continue after system reboots   |
| <b>Reference ID</b>      | 18014024616  |
| <b>Version</b>           | Intel® VROC Linux* 8.0   |
| <b>Issue Description</b> | During the Intel® VROC RAID reshaping process, reboot the system. After system boots up, the RAID reshaping process doesn't continue until the completion. |
| <b>Workaround</b>        | Use the following command to manually start the reshape process:<br># <code>systemctl start mdadm-grow-continue@&lt;container_md_name&gt;.service</code>   |

**Table 10-6. FailSpare Event is Not Logged in Syslog**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | <i>FailSpare</i> event is not logged in syslog   |
| <b>Reference ID</b>      | 18017126881  |
| <b>Version</b>           | Intel® VROC Linux* 8.0   |
| <b>Issue Description</b> | When a hot spare drive is failed, the <i>FailSpare</i> event and critical information is not logged in syslog. |
| <b>Workaround</b>        | Not at this time.  |

**Table 10-7. mdadm is Unable to Remove the Hot-Removed Drive During RAID 10 Resyncing Sporadically**

|                     |  |
|---------------------|--|
| <b>Title</b>        | <i>mdadm</i> is unable to remove the hot-removed drive during RAID 10 resyncing sporadically |
| <b>Reference ID</b> | 18017145961  |
| <b>Version</b>      | Intel® VROC Linux* 8.0   |

|                          |  |
|--------------------------|--|
| <b>Issue Description</b> | While the RAID 10 resyncing is in progress, try to fail incrementally one RAID 10 member drive by using the command <code>mdadm -f /dev/XXX</code> . The failed drive is not removed until resyncing is completed. |
| <b>Workaround</b>        | Not needed.  |

**Table 10-8. LVM Creation Failed on Intel® VROC RAID**

|                          |   |
|--------------------------|---|
| <b>Title</b>             | LVM creation failed on Intel® VROC RAID   |
| <b>Reference ID</b>      | 18017201628 / 18014380819   |
| <b>Version</b>           | RHEL* 8.2 and RHEL* 8.4   |
| <b>Issue Description</b> | When creating LVM on top of an Intel® VROC RAID, there will be an error because of the bug in LVM in RHEL* 8.2. For RHEL* 8.4, the issue occurs only with 4k logical block size drives. RHEL* 8.3 will not be affected. |
| <b>Workaround</b>        | Not at this time.   |

**Table 10-9. mdadm May Sometimes Fail to Stop RAID Volume Completely**

|                          |   |
|--------------------------|---|
| <b>Title</b>             | <i>mdadm</i> may sometimes fail to stop RAID volume completely  |
| <b>Reference ID</b>      | 18017242555   |
| <b>Version</b>           | Intel® VROC Linux* 8.0  |
| <b>Issue Description</b> | When stopping a RAID volume by running the command <code>mdadm --stop</code> , it may sometimes fail to stop it completely. |
| <b>Workaround</b>        | Try several more times running the command <code>mdadm --stop</code> .  |

**Table 10-10. iostat Command May Report 0 Statistics For md Devices**

|                          |   |
|--------------------------|---|
| <b>Title</b>             | <i>iostat</i> command may report 0 statistics for <i>md</i> devices   |
| <b>Reference ID</b>      | 18017250779   |
| <b>Version</b>           | RHEL* 8.2/8.3/8.4/8.5   |
| <b>Issue Description</b> | The <i>iostat</i> utility reports 0 statistics for <i>md</i> devices. This issue is resolved in RHEL* 8.6 and later versions. |
| <b>Workaround</b>        | Not at this time.   |

**Table 10-11. Failed Array is Not Automatically Stopped and Unmounted**

|                     |   |
|---------------------|---|
| <b>Title</b>        | Failed array is not automatically stopped and unmounted |
| <b>Reference ID</b> | 18017251688   |
| <b>Version</b>      | Intel® VROC Linux* 8.0                                  |

|                          |  |
|--------------------------|--|
| <b>Issue Description</b> | When using Intel® VROC RAID with a Linux* filesystem mounted, if the RAID volume is failed, the mounted file system will not be auto unmounted, and the RAID volume is still active. |
| <b>Workaround</b>        | Not needed.  |

**Table 10-12. Spare Drive is Recognized During SLES Installation**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | Spare drive is recognized during SLES installation   |
| <b>Reference ID</b>      | 22011931103/1508711532/18017426901   |
| <b>Version</b>           | SLES 15 SP2/SP3  |
| <b>Issue Description</b> | During SLES 15 SP2/SP3/SP4 OS installation, the drive marked as spare in Intel® VROC UEFI HII is displayed when selecting the destination disk for installation. |
| <b>Workaround</b>        | Do not install the OS onto the spare drive.  |

**Table 10-13. NVMe RAID Member Device Does not Disappear from RAID Volume After Hot Remove When Native NVMe Multipathing is Enabled**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | NVMe RAID member device doesn't disappear from RAID volume after hot remove when native NVMe multipathing is enabled                     |
| <b>Reference ID</b>      | 18017512825  |
| <b>Version</b>           | RHEL* 8.4  |
| <b>Issue Description</b> | When native NVMe multipathing is enabled, the NVMe RAID member device is still visible in the RAID volume when it is hot removed.        |
| <b>Workaround</b>        | Manually remove it from the RAID volume by running the following command:<br><code># echo "remove" &gt; /sys/block/nvmeXn1/uevent</code> |

**Table 10-14. Rename RAID volume With Special Characters Results in An Unexpected Device Name in the /dev/md DIRECTORY**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | Rename RAID volume with special characters results in an unexpected device name in the /dev/md directory   |
| <b>Reference ID</b>      | 18018582025  |
| <b>Version</b>           | Intel® VROC Linux* 8.0   |
| <b>Issue Description</b> | When changing or creating a RAID volume name with special characters, the device name created in the /dev/md directory may not be the same as defined. |
| <b>Workaround</b>        | Do not use special characters to name RAID volumes.  |

**Table 10-15. Actual RAID Volume Capacity After OLCE Expansion to Maximum is 4MiB Smaller than Expected**

|                          |   |
|--------------------------|---|
| <b>Title</b>             | Actual RAID volume capacity after OLCE expansion to maximum is 4MiB smaller than expected   |
| <b>Reference ID</b>      | 18019910856   |
| <b>Version</b>           | Intel® VROC Linux* 8.0  |
| <b>Issue Description</b> | Create a RAID volume with a designated size (smaller than the maximum supported) and then increase the capacity through OLCE to maximum. The actual RAID volume capacity is 4MiB smaller than expected. |
| <b>Workaround</b>        | Not at this time.   |

**Table 10-16. Unexpected Metadata Update When RAID Level Migration From 0 To 10 is Failed**

|                          |  |
|--------------------------|--|
| <b>Title</b>             | Unexpected metadata update when RAID level migration from 0 to 10 is failed  |
| <b>Reference ID</b>      | 18020767771  |
| <b>Version</b>           | Intel® VROC Linux* 8.0   |
| <b>Issue Description</b> | When migrating a 2-disk RAID level 0 to a 4-disk RAID level 10, the <i>mdadm</i> command returns failed but the RAID metadata is updated to RAID level 10. |
| <b>Workaround</b>        | Not at this time.  |

**Table 10-17. RAID Resync Progress After System Reboots Becomes Smaller than the Number Before System Reboots**

|                          |   |
|--------------------------|---|
| <b>Title</b>             | RAID resync progress after system reboots becomes smaller than the number before system reboots   |
| <b>Reference ID</b>      | 18020971695   |
| <b>Version</b>           | Intel® VROC Linux* 8.0  |
| <b>Issue Description</b> | During RAID resync process, reboot the system and check RAID resync status. The % is less than the number before reboot. No impact on data consistency and RAID resync functionality. |
| <b>Workaround</b>        | Not at this time.   |

**Table 10-18. Failed RAID Volume is Still Available in the Intel® Matrix RAID Array**

|                          |   |
|--------------------------|---|
| <b>Title</b>             | Failed RAID volume is still available in the Intel® Matrix RAID array   |
| <b>Reference ID</b>      | 22016090730 / 15012220576   |
| <b>Version</b>           | Intel® VROC Linux* 8.0  |
| <b>Issue Description</b> | When hot remove one drive from the Intel® Matrix RAID array with RAID 0 volume and any other different level volume (RAID 1, RAID 5, RAID |

**Known Issues in Intel® VROC Linux\* 8.0**

|                   |   |
|-------------------|---|
|                   | 10), then the RAID 0 volume will become failed, but the failed RAID 0 volume will be assembled after system reboots.<br>It has no real impact to the user because the failed RAID volume is not accessible. |
| <b>Workaround</b> | Not at this time.   |

§§