

SupremeRAID™ SE

User Guide for Linux

May 2025



Graid Technology Inc.

Copyright © 2021–2025 Graid Technology Inc. All Rights Reserved.

SupremeRAID™ is a registered trademark of Graid Technology Inc. All other trademarks and registered trademarks are the property of their respective owners.

Graid Technology reserves the right to make changes without further notice to any products or content herein to improve reliability, function, or design. Graid Technology makes no warranty as to the accuracy or completeness of the content or information provided herein, which are provided on an “as is” basis.

No license to Graid Technology's or any third party's intellectual property rights are conveyed hereunder.

Publication: May 30, 2025

Table of Contents

INTRODUCTION.....	5
SUPREMERAIID™ SE SPECIFICATIONS & MODES.....	6
RAID Components	7
Physical Drive (PD).....	8
Drive Group (DG).....	8
Virtual Drive (VD).....	8
Controller (CX).....	9
Limitations of SupremeRAID™ SE	9
SIGN UP FOR A SUPREMERAIID™ SE SUBSCRIPTION	10
INSTALLATION.....	11
Prerequisites.....	11
BIOS Setting.....	11
Installing the Software Driver	12
Using the Pre-installer and Installer.....	12
Managing Physical Drives.....	18
Creating a Physical Drive	18
Deleting a Physical Drive.....	19
Marking a Physical Drive Online/Offline/Good/Bad	19
Assigning a Hot Spare Drive.....	20
Managing Drive Groups.....	21
Creating a Drive Group.....	21
Deleting a Drive Group.....	22
Degradation and Recovery	23
Rescue Mode.....	23
Managing Virtual Drives	24

Creating a Virtual Drive	24
Deleting a Virtual Drive	25
Features Overview	26
Consistency Checks	26
Drive Copyback.....	26
Double Failure Protection with Distributed Journaling.....	27
Support for the Dataset Management (DSM) Deallocate command on virtual drives	28
Attachments	29
Events for SupremeRAID™ SE.....	29

INTRODUCTION

SupremeRAID™ SE is the most powerful, high-speed data protection solution specially designed for NVMe SSDs. SupremeRAID™ SE installs a virtual NVMe controller onto the operating system and integrates a high-performance, AI processor-equipped PCIe RAID card into the system to manage the RAID operations of the virtual NVMe controller.

This document explains how to install the SupremeRAID™ SE software package for Linux and how to manage the RAID components using the Graphical Management Console.

SUPREMERAIID™ SE SPECIFICATIONS & MODES

SupremeRAID™ SE Driver Specifications	
Supported Models	SE-TU, SE-AM, SE-AD, SE-BW
Supported RAID levels	RAID 0, 1, 5, 10,
Supported OS	<ul style="list-style-type: none"> ● AlmaLinux 8.5-8.10 (Kernel 4.18), 9.0-9.5(Kernel 5.14) ● CentOS 8.3, 8.4, 8.5 (Kernel 4.18) ● Debian 11.6 (Kernel 5.10), 12 (Kernel 6.1) ● openSUSE Leap 15.2-15.3 (Kernel 5.3), 15.4-15.5 (Kernel 5.14) ● Oracle Linux 8.7-8.10 (RHCK 4.18 and UEK 5.15), 9.1-9.4 (RHCK 5.14 and UEK 5.15) ● Proxmox VE 8.1 (Kernel 6.5), 8.2 (Kernel 6.8) ● RHEL 7.9 (Kernel 3.10 or 4.18), 8.3-8.10 (Kernel 4.18), 9.0-9.5 (Kernel 5.14) ● Rocky Linux 8.5-8.10(Kernel 4.18), 9.0-9.5(Kernel 5.14) ● SLES 15 SP2-SP3(Kernel 5.3), 15 SP4-SP5 (Kernel 5.14) ● Ubuntu 20.04.0-20.04.4 (Kernel 5.4 and 5.15), 22.04.0-22.04.2 (Kernel 5.15), 22.04.3-22.04.4 (Kernel 6.2), 24.04 (Kernel 6.8)
Supported GPU models	Turing, Ampere, Ada Lovelace, Blackwell series
Recommended minimum drive number for each RAID level	RAID 0: at least one drives RAID 1: at least two drives RAID 5: at least three drives RAID 10: at least two drives
Maximum number of physical drives	8
Maximum number of drive groups	8
Maximum number of virtual drives per drive group	1023
Maximum size of the drive group	Defined by the physical drive sizes
Configurable strip size (RAID0, RAID10)	4k, 8k, 16k, 32k, 64k,128k

SupremeRAID™ SE offers two different modes: Perpetual and Subscription.


- Perpetual: For licensing inquiries, please contact our [Sales Department](#).

- Subscription: Please refer to the [Sign up for a SupremeRAID™ SE subscription](#) section. This is a Beta release, provided solely for the purpose of testing and evaluating new features. It is not intended for use in production environments and may exhibit stability or performance issues. We encourage you to use it exclusively for testing and to share your feedback to help us enhance the final version.

RAID Components

There are four major RAID logical components in SupremeRAID™ SE:

- Physical Drive (PD)
- Drive Group (DG)
- Virtual Drive (VD)
- Controller (CX)

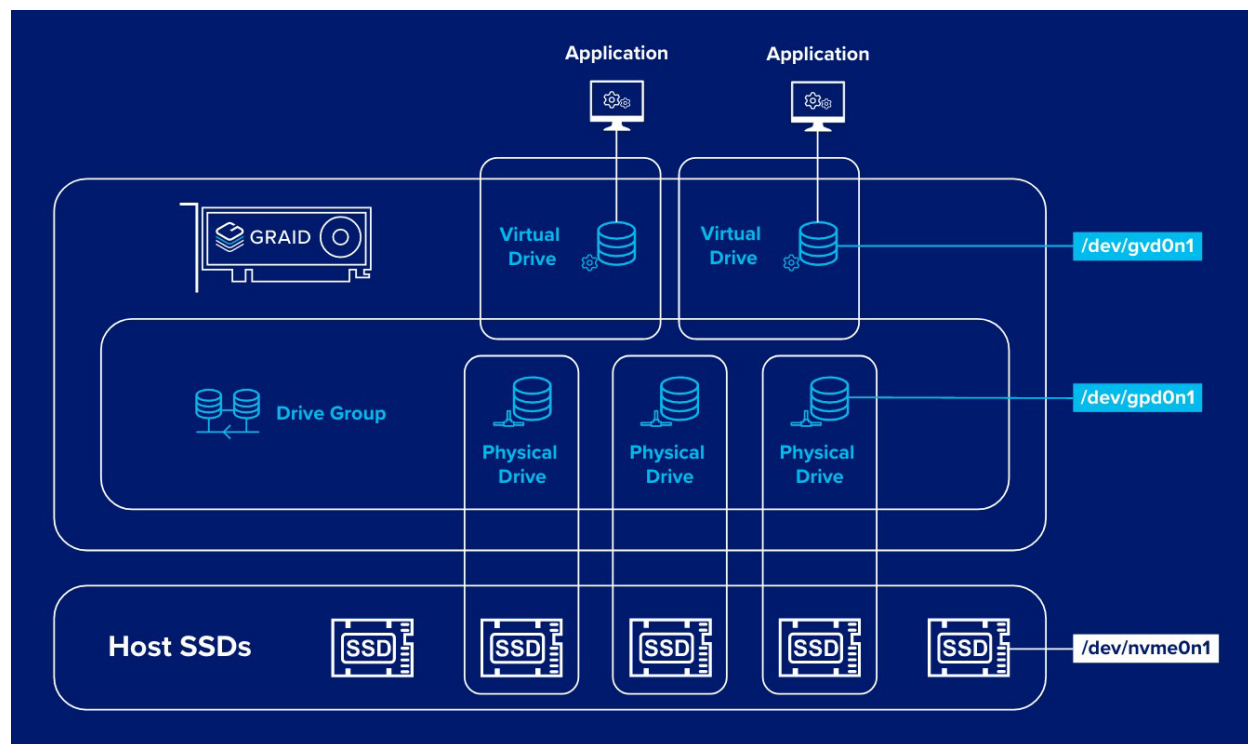

Physical Drive (PD)

Since NVMe drives are not directly attached to the SupremeRAID™ SE controller, you must tell the controller which SSDs can be managed. After an SSD is created as a physical drive, the SupremeRAID™ SE driver unbinds the SSD from the operating system, meaning the device node (`/dev/nvmeX`) disappears and is no longer accessible. At the same time, the SupremeRAID™ SE driver creates a corresponding device node (`/dev/gpdX`). You can check the SSD information, such as SSD model or SMART logs, using this device node. To control and access the SSD using `/dev/nvmeXn1`, you must first delete the corresponding physical drive.

SupremeRAID™ SE supports a maximum 8 physical drives in one Drive Group.

Drive Group (DG)

The main component of RAID logic is a RAID group. When the drive group is created, the SupremeRAID™ SE driver initializes the physical drives with the corresponding RAID mode to ensure that the data and parity are synchronized. There are two types of initialization processes.

- Fast Initialization: When all the physical drives in the drive group (DG) support the deallocate dataset management command, the SupremeRAID™ SE driver performs fast initialization by default, meaning the drive group state is optimized immediately.
- Background Initialization: Performance will be slightly affected by the initialization traffic, but you can still create the virtual drive and access the virtual drive during a background initialization.

SupremeRAID™ SE supports a maximum of 8 Drive Groups.

Virtual Drive (VD)

The virtual drive is equivalent to the RAID volume. You can create multiple virtual drives in the same drive group for multiple applications. The corresponding device node (`/dev/gdgXnY`) appears on the operating system when you create a virtual drive, and you can make the file system or run application directly on this device node.

SupremeRAID™ SE supports a maximum of 1023 Virtual Drives in each Drive Group.

Controller (CX)


The controller is the core component of the RAID system. It provides detailed hardware information such as GPU serial number, temperature, and fan speed. RAID management relies on the controller, so the controller's state directly affects the underlying drive group operations.

Limitations of SupremeRAID™ SE

- System suspension and hibernation are currently unsupported due to a limitation in the NVIDIA driver.
- NVMe-oF drives are not supported in the Linux driver.
- If you have previously installed other SupremeRAID™ products, executing the SupremeRAID™ SE installation will prevent the restoration of previous product settings.
- For SupremeRAID™ SE Subscription mode, please note that one email account is restricted to a single subscription, machine and GPU. Cross-device usage is not supported. After your subscription expires, you will still be able to access and read your data, but the data cannot be written to the drive.


SIGN UP FOR A SUPREMERAIID™ SE SUBSCRIPTION

Step 1 You can sign up for the SupremeRAID™ SE through our [official website](#). Please create an account on the SupremeRAID™ SE Portal.

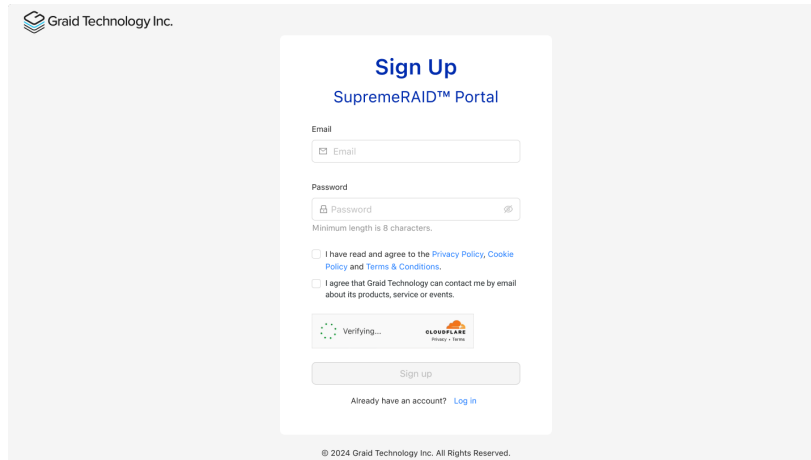

The screenshot shows the 'Sign Up SupremeRAID™ Portal' page. It includes a 'Graid Technology Inc.' logo at the top left. The main form has fields for 'Email' and 'Password' (with a minimum length of 8 characters). Below the password field, there are two checkboxes: 'I have read and agree to the Privacy Policy, Cookie Policy and Terms & Conditions.' and 'I agree that Graid Technology can contact me by email about its products, service or events.' A 'Verifying...' status bar with a 'CLOUDFLARE' logo is visible. At the bottom, there is a 'Sign up' button and a link for 'Already have an account? Log in'. The footer states '© 2024 Graid Technology Inc. All Rights Reserved.'

Step 2 Choose a subscription plan that is right for you.

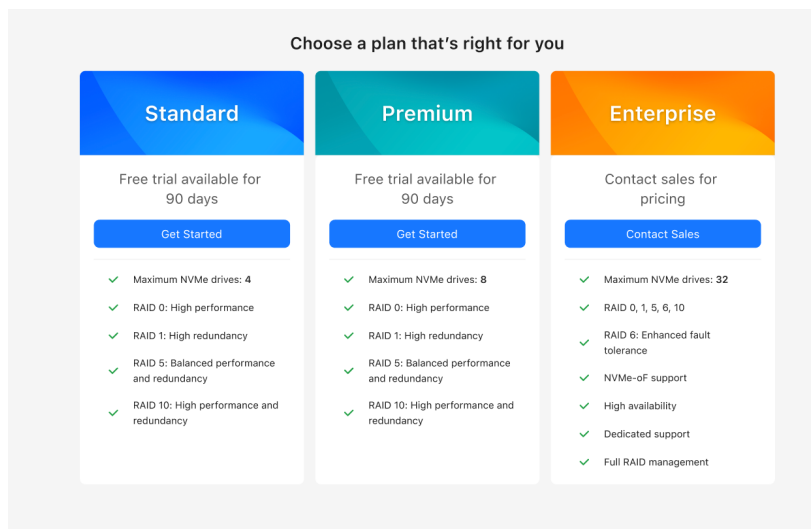

The screenshot shows the 'Choose a plan that's right for you' page. It features three columns for different subscription plans: Standard, Premium, and Enterprise. Each column has a 'Get Started' or 'Contact Sales' button and a list of features.

Standard	Premium	Enterprise
Free trial available for 90 days	Free trial available for 90 days	Contact sales for pricing
Get Started	Get Started	Contact Sales
<ul style="list-style-type: none"> ✓ Maximum NVMe drives: 4 ✓ RAID 0: High performance ✓ RAID 1: High redundancy ✓ RAID 5: Balanced performance and redundancy ✓ RAID 10: High performance and redundancy 	<ul style="list-style-type: none"> ✓ Maximum NVMe drives: 8 ✓ RAID 0: High performance ✓ RAID 1: High redundancy ✓ RAID 5: Balanced performance and redundancy ✓ RAID 10: High performance and redundancy 	<ul style="list-style-type: none"> ✓ Maximum NVMe drives: 32 ✓ RAID 0, 1, 5, 6, 10 ✓ RAID 6: Enhanced fault tolerance ✓ NVMe-oF support ✓ High availability ✓ Dedicated support ✓ Full RAID management

Step 3 Upon successful subscription, please follow the steps in the next section to proceed with the installation.

INSTALLATION

This section describes how to install the SupremeRAID™ SE software package for Linux operating systems.

Prerequisites

Before installing the software package, ensure that the system meets the following requirements:

- Minimum system requirements:
 - CPU: 2 GHz or faster with at least 8 cores
 - RAM: 16 GB
 - Supported operating system: See the [Supported Operating Systems](#) section on our website.
 - An available PCIe Gen3 or Gen4 x16 slot
- The GPU card must be installed into a PCIe x16 slot.
- The SupremeRAID™ SE software package, which includes the Pre-Installer and Installer, can be downloaded directly from the Graid Technology website. The Pre-Installer configures all necessary dependencies and environment settings automatically prior to installing the SupremeRAID™ SE driver. The Installer contains the SupremeRAID™ SE driver package and will automatically detect your Linux distributions and install the appropriate files.
- Make sure a SupremeRAID™ SE compatible SSD drive is being used. SupremeRAID™ SE supports all form factors of NVMe drives, including M.2, U.2, U.3, EDSFF, and AIC.

BIOS Setting

- [OPTIONAL] The IOMMU function (AMD) or VT-d function (Intel) is recommended to be disabled in the system BIOS, typically found on the BIOS Advanced page.
- [OPTIONAL] It is highly recommended to disable the UEFI Secure Boot function on the BIOS security page. If UEFI Secure Boot is not applicable in your system, you will need to sign the NVIDIA Kernel Module. For further information and troubleshooting, please refer to the NVIDIA website.

Installing the Software Driver

The recommended and quickest way to install the SupremeRAID™ SE software is by using the pre-installer scripts and installer (described below).

Using the Pre-installer and Installer

The SupremeRAID™ SE pre-installer is an executable file that contains the required dependencies and a setup script that installs the NVIDIA driver. The script makes it easy to prepare the environment and install the SupremeRAID™ SE driver on every supported Linux distribution. Use the following steps to prepare the environment and install the SupremeRAID™ SE driver using the pre-installer in supported Linux distributions.

Note: To run the pre-installer, the system must have internet access to download the required dependencies from the official mirror.

Step 1 Go to the Graid Technology website to download the latest version of the pre-installer and make it executable. Please download the package in [Dependencies and Utilities](#).

Dependencies and Utilities

	Links
NVIDIA Driver	NVIDIA-Linux-
SupremeRAID™ SE Pre-installer	graid-sr-se-pre-installer

```
$ sudo wget [filelink]
$ sudo chmod +x [Filename]
$ sudo ./[filename]
```

Step 2 Download the latest version of the installer and make it executable. Please download the installer from the [Driver Package](#) section.

Driver Package

SR-SE-TU
SR-SE-AM
SR-SE-AD
SR-SE-BW

- Supported GPU Arch: Turing
- Download Installer: [graid-sr-se-installer](#)


c49cbf
md5

```
$ sudo wget[filelink]
$ sudo chmod +x [Filename]
$ sudo ./[filename]
```


Step 3 At the Welcome page, select Next and press Enter to view the end-user license agreement.



Step 4 In the end-user license agreement page, you can scroll down to read the license content. After reviewing the license, accept the agreement, and click Next to proceed.

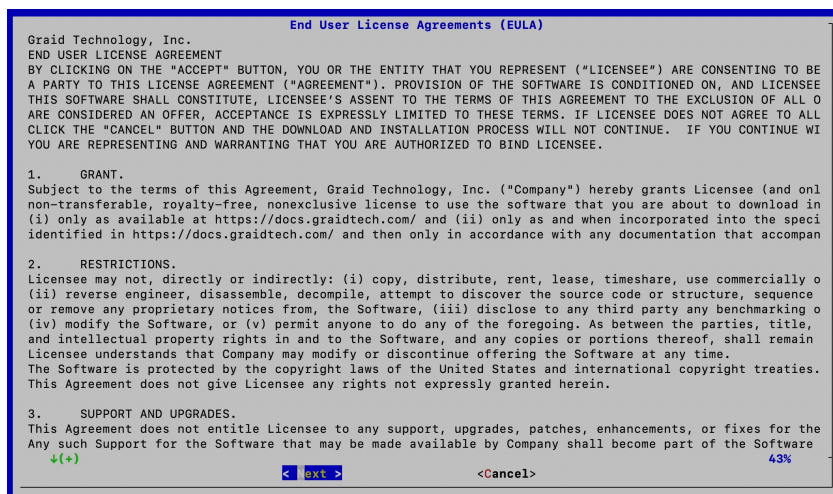

Step 5 Complete the installation. You can access the SupremeRAID™ SE Management Console. The SupremeRAID™ SE Management Console requires port 50060 to be open for proper functionality. If this port is not enabled, the web interface may not work correctly.

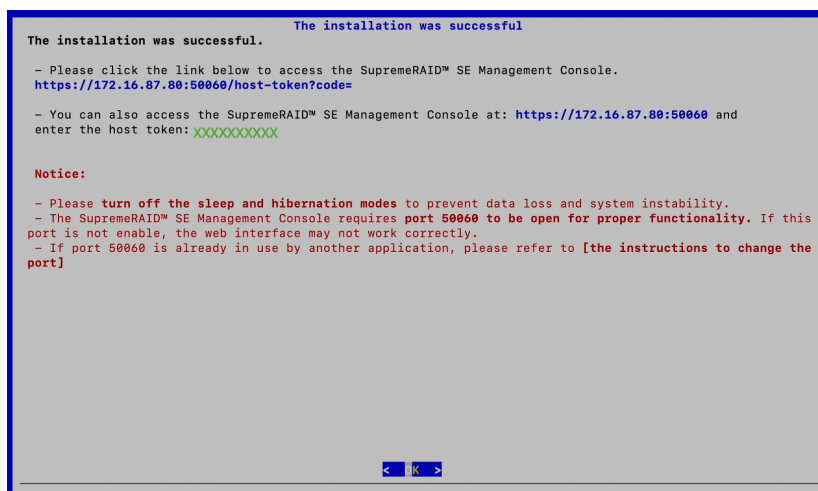


If port 50060 is occupied by another application, you can set up your own port and IP, please edit the configuration file `/etc/graidmgr/service.conf`.

For example, if you want to set the port and IP to 8888 and 123.456.7.889 respectively, it would look as follows:

```
[common]
web_port=8888
web_addr=123.456.7.889
```

Step 6 Enter the host token into the SupremeRAID™ SE Management Console.

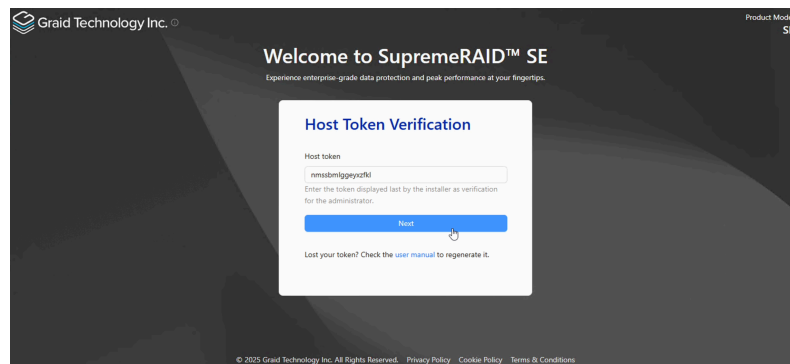


If you have lost the host token, please use the following command to retrieve the host token.

```
sudo graid-mgr host_token gen
```


Step 7 Please select your preferred mode. SupremeRAID™ SE offers two different modes: Perpetual and Subscription.

*Perpetual: For licensing inquiries, please contact our [Sales Department](#).

*Subscription: This is a Beta release, provided solely for the purpose of testing and evaluating new features. It is not intended for use in production environments and may exhibit stability or performance issues. We encourage you to use it exclusively for testing and to share your feedback to help us enhance the final version.

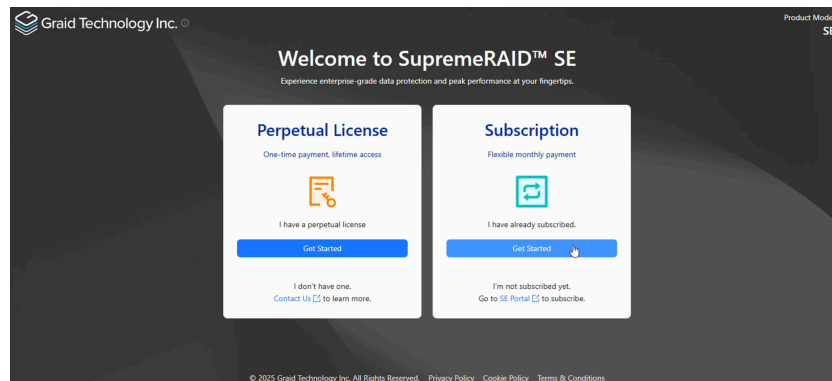

Step 8 If you choose Subscription mode, please log in to the SupremeRAID™ SE Management Console using the email and password you [signed up](#) with.

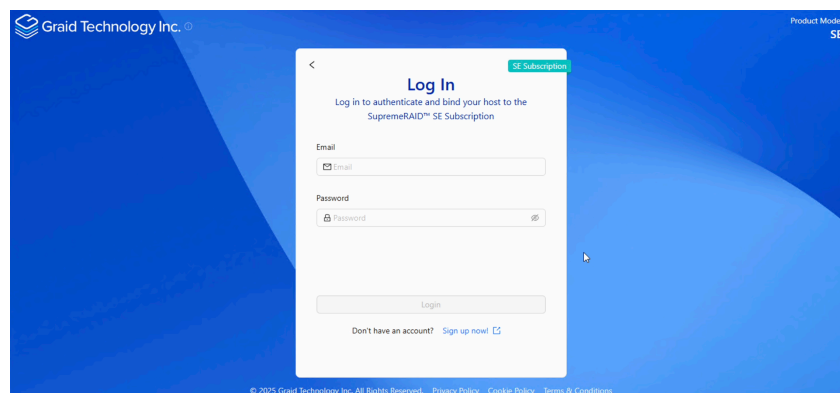

If you choose Perpetual mode, please set up password.

Set Up Password
Create an admin password for your SupremeRAID™ SE Perpetual

Account
admin

* Password
Password
Minimum length is 8 characters.

* Confirm password
Password

Set admin password

© 2024 Graid Technology Inc. All Rights Reserved. Privacy Policy Cookie Policy Terms & Conditions

Step 9 Bind your GPU and start the RAID setup

Bind GPU

Please select one of your active subscription plans and the GPU device to be bound to your subscription. Once activated, this subscription will be associated with the selected GPU.

* My subscriptions
SupremeRAID™ SE Beta - Standard Plan #SUB-00004

If you do not have a active subscription, you can [subscribe here](#).

Detected GPU information


Model	Series	UUID	Serial number
<input checked="" type="radio"/> NVIDIA T400 4GB	Quadro RTX	GPU-2d17547a-1d8e-2143-9d7c-37ecf249f5ca	1420422030452
<input type="radio"/> NVIDIA T400 4GB	Quadro RTX	GPU-2d17547a-1d8e-2143-9d7c-37ecf249f5ca	1420422030452
<input type="radio"/> NVIDIA T400 4GB	Quadro RTX	-	-

Refresh Activate

Managing Physical Drives

Creating a Physical Drive

To create physical drives, please log in to the SupremeRAID™ SE Management Console, then navigate to the RAID management / Physical Drives section on the sidebar menu and click the “Create” button.

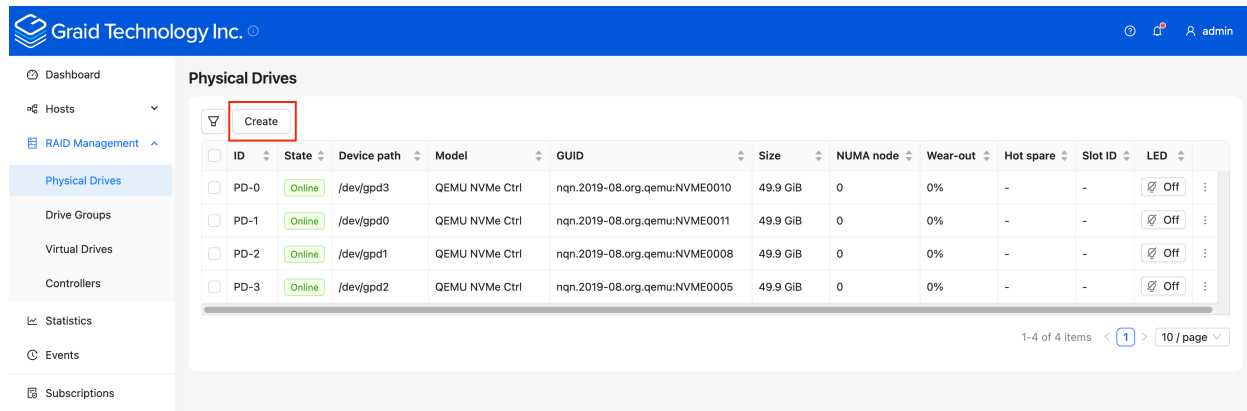


Physical Drive State:

State	Description
ONLINE	Physical drive was added to a drive group and is ready to work.
HOTSPARE	Physical drive is configured as a hot spare drive.
FAILED	Physical drive is detected, but it is not operating normally.
OFFLINE	Physical drive is marked as offline.
REBUILD	Physical drive is being rebuilt.
MISSING	Physical drive cannot be detected.
UNCONFIGURED_GOOD	Physical drive did not join a drive group.
UNCONFIGURED_BAD	Physical drive did not join a drive group and is not operating normally.
COPYBACK	Physical Drive is performing copyback

Deleting a Physical Drive


To delete physical drives, please select the physical drives you want to delete and click the “Delete” button.

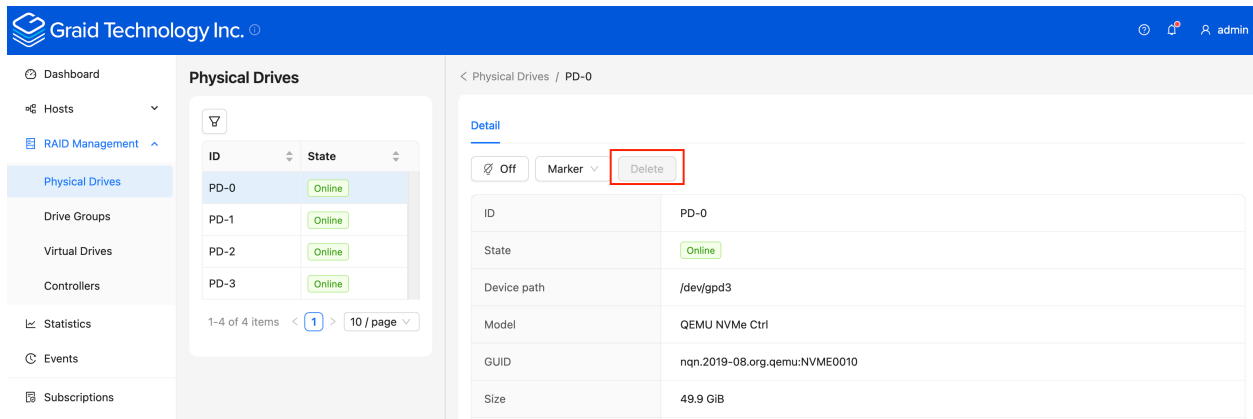

Note: You cannot delete a physical drive which is used by drive group.

Marking a Physical Drive Online/Offline/Good/Bad

To mark a physical drive as Online/Offline/Good/Bad, please select the physical drives you want to change and click the “Marker” button.

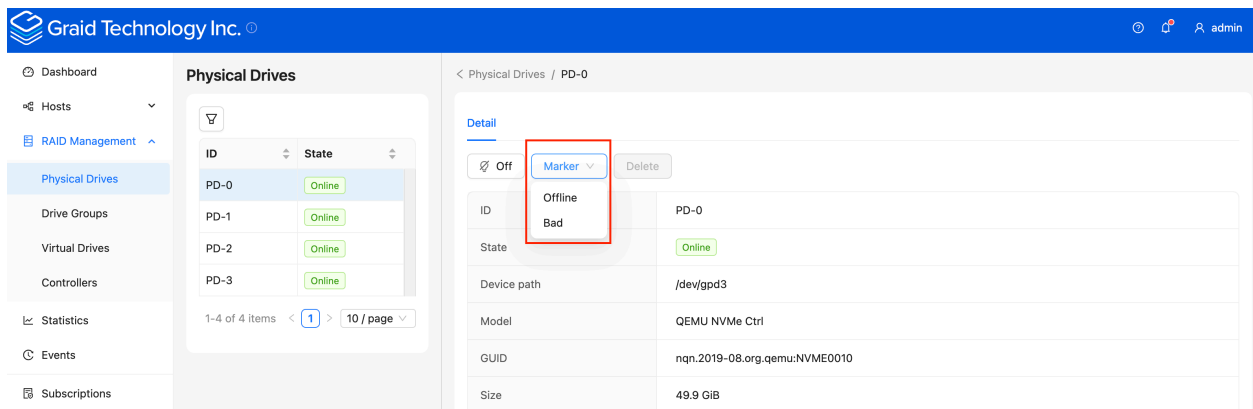

Assigning a Hot Spare Drive

To assign a physical drive as a hot spare, please select the physical drives you want assign and click the “Hot spare” button.

The screenshot displays the Graid Technology Inc. web interface for managing physical drives. The left sidebar contains navigation links: Dashboard, Hosts, RAID Management, Physical Drives (selected), Drive Groups, Virtual Drives, Controllers, Statistics, Events, and Subscriptions. The main area is titled 'Physical Drives' and shows a list of four drives:

ID	State
PD-0	Unconfigured good
PD-1	Online
PD-2	Online
PD-3	Online


Below the list, it indicates '1-4 of 4 items' and '10 / page'. The right panel shows the 'Detail' view for 'PD-0'. At the top, there are buttons: 'On', 'Mark' (with a dropdown), 'Hot spare' (highlighted with a red box), and 'Delete'. The 'Mark' dropdown is open, showing 'Hot spare' as the selected option. The details table for PD-0 is as follows:

ID	PD-0
State	Unconfigured good
Device path	/dev/gpd3
Model	QEMU NVMe Ctrl
GUID	nqn.2019-08.org.qemu:NVME0010
Size	49.9 GiB

Managing Drive Groups

Creating a Drive Group

To create a drive group, please log in to the SupremeRAID™ SE Management Console, then navigate to the RAID management / Drive Group section on the sidebar menu and click the “Create” button.

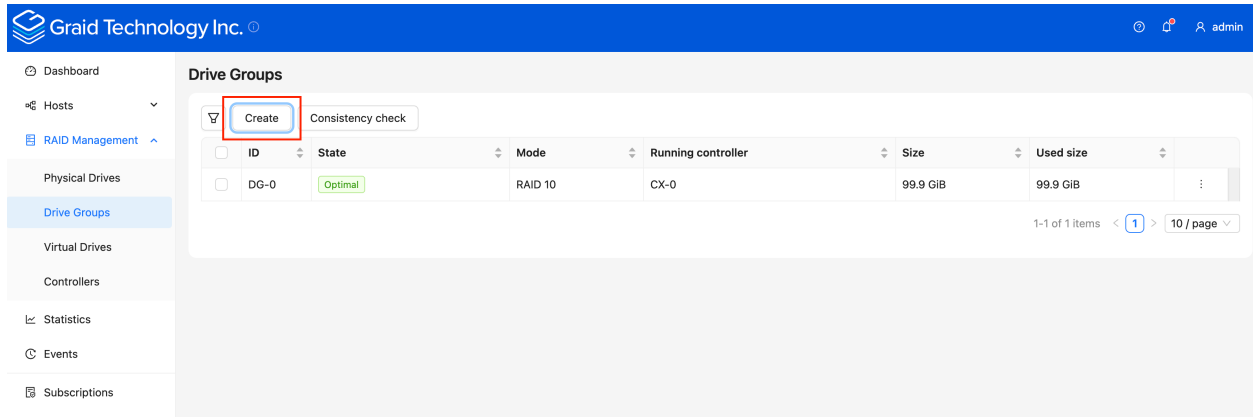


Drive Group State:

State	Description
OFFLINE	Drive group is not working properly. This condition usually occurs when the number of damaged physical drives exceeds the limit.
OPTIMAL	Drive group is in optimal state.
OPTIMAL (!)	Drive group is in optimal state but found inconsistency data.
OPTIMAL (cc)	Drive group is in optimal state and the consistency check task is ongoing.
OPTIMAL (cp)	Drive group is performing copyback.
OPTIMAL (cc!)	Drive group is in optimal state and the consistency check task is ongoing but found inconsistent data.
DEGRADED	Drive group is available and ready, but the number of missing or failed physical drives has reached the limit.
PARTIALLY_DEGRADED	Drive group is available and ready for use, but some physical drives are missing or failed.

State	Description
RECOVERY	Drive group is recovering
FAILED	Drive group is not working normally.
INIT	Drive group is initializing.
RESYNC	Drive group is resynchronizing. This condition usually occurs when the system encounters an abnormal crash. Do not replace the physical drive in this state until the resynchronization process completes.
RESCUE	Drive group is in rescue mode.

Deleting a Drive Group

To delete a drive group, please log in to the SupremeRAID™ SE Management Console, then navigate to the RAID management / Drive Group section on the sidebar menu. Please select the drive group you want to delete and click the “Delete” button.

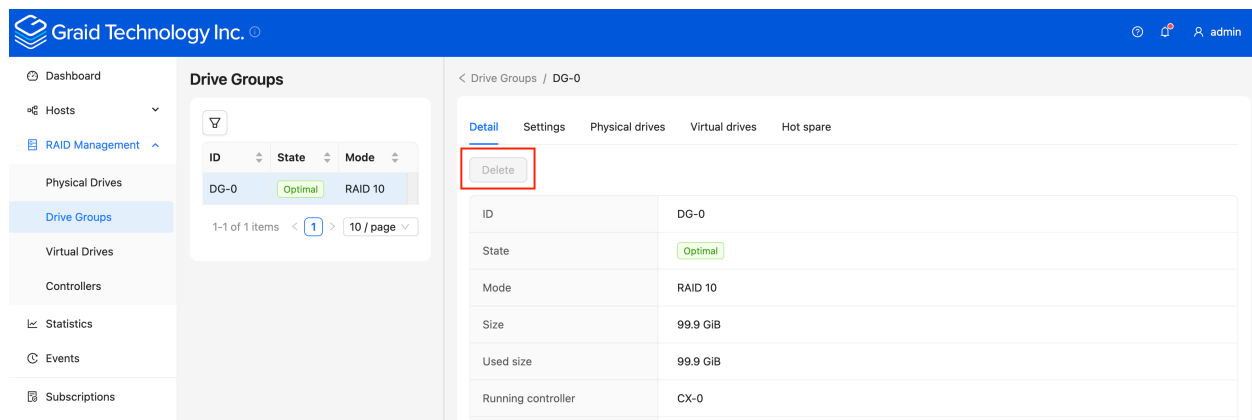

Note: You cannot delete a drive group that contains a virtual drive.

Degradation and Recovery

If multiple drive groups require simultaneous recovery, the drive groups recover individually. If multiple physical drives in the same drive group require rebuilding, the physical drives are rebuilt simultaneously.

Rescue Mode

If a damaged drive group is initialized or a recovering drive group encounters an abnormal system crash, the data integrity of the drive group is affected. In this event, the drive group is forced offline to prevent data from being written to the drive group. To read the data from the drive group, force the drive group to go online using Rescue mode.

The screenshot displays the Graid Technology Inc. RAID Management web interface. On the left, a sidebar menu includes Dashboard, Hosts, RAID Management (selected), Physical Drives, Drive Groups (selected), Virtual Drives, Controllers, Statistics, Events, and Subscriptions. The main content area is titled 'Drive Groups' and shows a table of drive groups. Drive group DG-1 is highlighted with a red box, indicating it is in a 'Failed' state. To the right, the 'Detail' tab for DG-7 is active, showing a 'Rescue mode' button highlighted with a red box. Below the button, a table lists the drive group's properties.

ID	State	Mode
DG-0	Optimal	RAID5
DG-1	Failed	RAID5
DG-2	Partially degraded	RAID5
DG-3	Offline	RAID5
DG-4	Recovery	RAID5
DG-5	Init	RAID5
DG-6	Resync	RAID5
DG-7	Optimal	RAID5


Detail	
Drive group ID	DG-7
State	Failed
Mode	RAID5
Size	6.83 GiB
Used size	3.42 GiB
Running controller	CX-0
Strip size	4 KiB
Virtual drive number	1

Note: A drive group in Rescue mode is read-only. Rescue mode cannot be disabled

Managing Virtual Drives

Creating a Virtual Drive

To create virtual drives, please log in to the SupremeRAID™ SE Management Console, then navigate to the RAID management / Virtual Drives section on the sidebar menu. Please click the “Create” button to select which the drive group you want to create virtual drives.

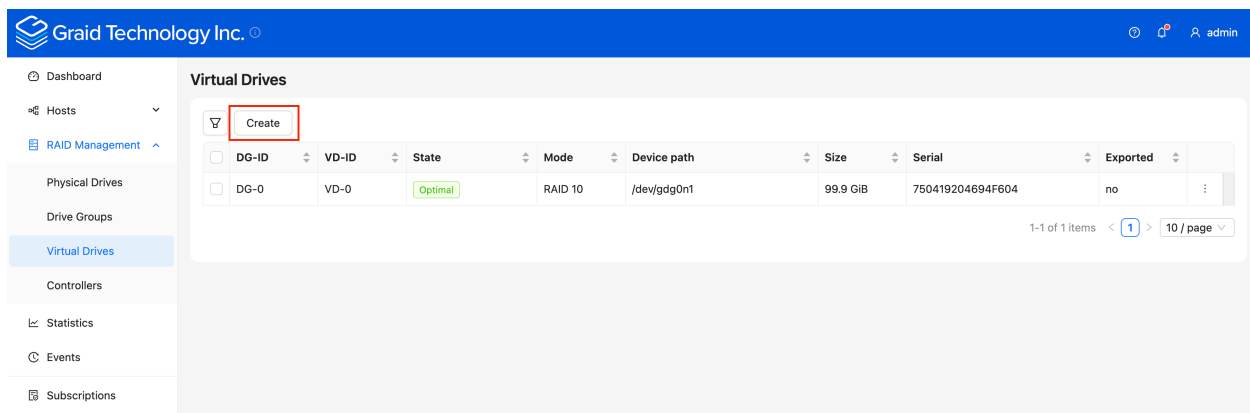

Virtual Drive State:

State	Description
OFFLINE	Drive group is not working normally. This condition is usually caused when the number of damaged physical drives exceeds the limit.
OPTIMAL	Drive group is in the optimal state.
PARTIALLY_DEGRADED	Drive group is available and ready for use, but some physical drives are missing or failed.
RECOVERY	Drive group is recovering.
FAILED	Drive group is not working normally.
INIT	Drive group is initializing.
RESYNC	Drive group is resynchronizing. This condition usually occurs when the system encounters an abnormal crash. Do not replace the physical drive in this state until the resynchronization process completes.

State	Description
RESCUE	Drive group is in rescue mode.

Stripe-cache state:

State	Description
OFFLINE	Stripe cache drive group is OFFLINE.
CLEAN	Stripe cache write-back has finished.
PURGE	Stripe cache is writing data into the virtual drive.
ACTIVE	Stripe cache is in optimal state.

Deleting a Virtual Drive

To delete a virtual drive, please log in to the SupremeRAID™ SE Management Console, then navigate to the RAID management / Virtual Drives section on the sidebar menu. Please select the virtual drive you want to delete and click the “Delete” button.


The screenshot shows the SupremeRAID™ SE Management Console interface. On the left sidebar, the 'Virtual Drives' menu item is selected. The main content area displays a list of virtual drives with columns for DG-ID, VD-ID, and State. A table shows one item: DG-0, VD-0, with a state of 'Optimal'. Below the table, there is a pagination control showing '1-1 of 1 items' and '10 / page'. To the right, the 'Detail' view for VD-0 is shown, with a 'Delete' button highlighted by a red box. The details include: Virtual drive ID (VD-0), State (Optimal), Drive group ID (DG-0), Mode (RAID 10), Device path (/dev/gdg0n1), and Size (99.9 GiB).

Features Overview

Consistency Checks

The consistency check operation verifies that the data is correct in Drive Groups that use RAID levels 1, 5, and 10. In a system with parity, for example, checking consistency calculates the data on one drive and compares the results to the contents of the parity drive.

To start the consistency check, please log in to the SupremeRAID™ SE Management Console, then navigate to the RAID management / Drive Group section on the sidebar menu. Select the drive group you want to perform the Consistency Check on and click the “Consistency Check” button.

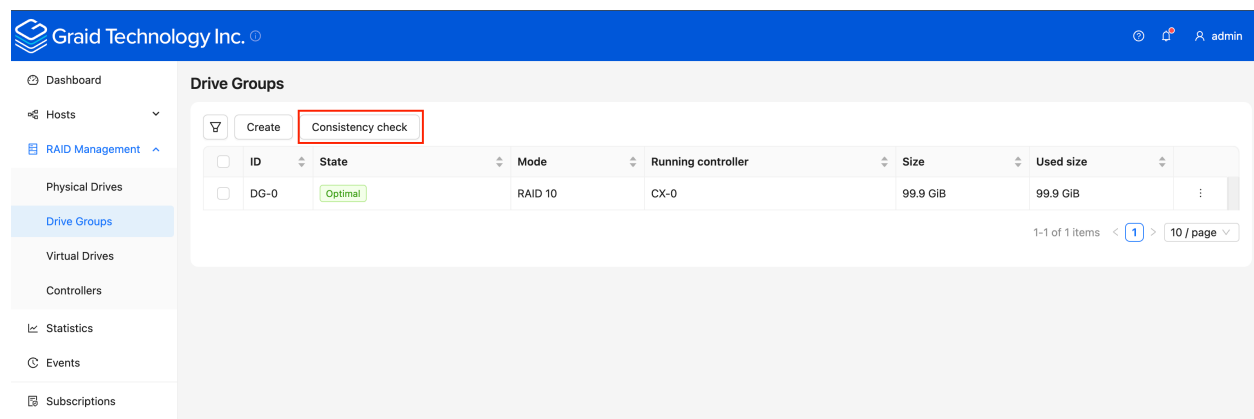


Note: You cannot perform a consistency check on RAID 0 because it does not provide data redundancy. Additionally, a consistency check can only run when the DG is in OPTIMAL or PARTIALLY_DEGRADED state.

Drive Copyback

The Drive Copyback feature allows users to manually initiate data migration from one drive to another without affecting the overall Drive Group state. This operation is user-controlled and can be performed for various reasons, such as replacing an aging drive, preparing for hardware upgrades, or managing storage configurations.

To start the Copyback, please log in to the SupremeRAID™ SE Management Console, then navigate to the RAID management / Drive Group section on the sidebar menu. Select the drive group you want to


perform the Copyback on and click the Physical Drives tab. Choose the physical drive first and click the “Actions” button to conduct Copyback.

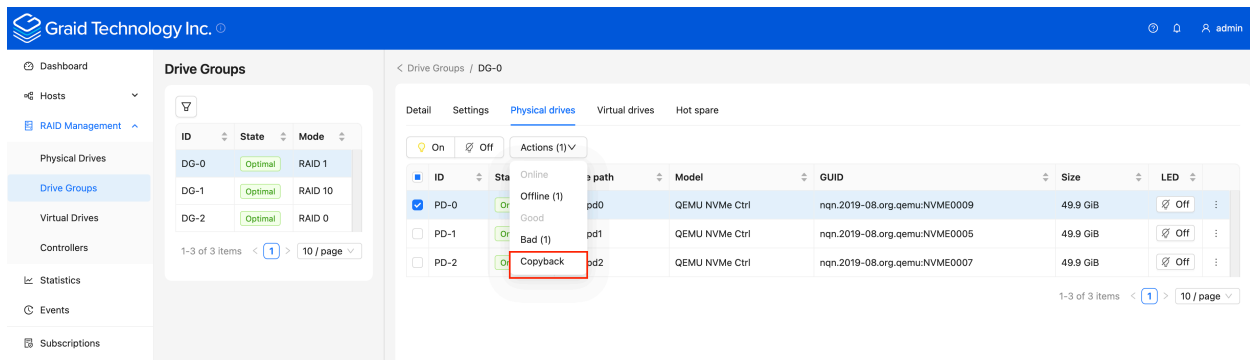

Double Failure Protection with Distributed Journaling

SupremeRAID™ SE incorporates a distributed journaling mechanism specifically designed to safeguard data during abnormal shutdowns in double-failure scenarios. This system ensures data integrity by logging data in a dedicated journaling space before writing it to the storage area. Any incomplete I/O operations are replayed upon service restart to maintain data consistency.

This journaling feature is automatically enabled in degraded mode to uphold data integrity. Additionally, users still have the flexibility to bypass journaling space reservation when creating a drive group.

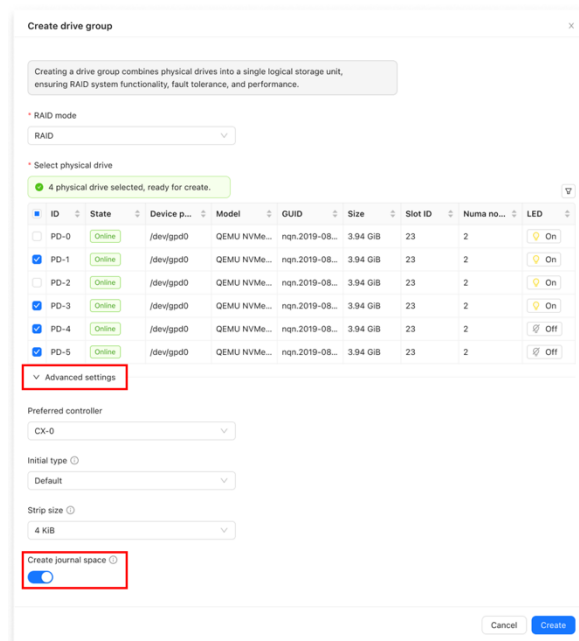

Note: Only RAID5 can enable the journal function. If the user bypasses the creation of the journal space, it cannot be recreated.

Support for the Dataset Management (DSM) Deallocate command on virtual drives

The SupremeRAID™ SE driver introduces support for the NVMe DSM deallocate (trim) command on virtual drives, improving the efficiency of unused storage space management on NVMe SSDs. This feature allows filesystems or applications to issue deallocate commands on virtual drives, which are then translated by the driver and sent directly to the SSDs. By enabling the drives to manage deallocated blocks internally, this reduces write amplification, optimizes storage efficiency, and enhances overall performance.

When a discard command is issued to a virtual drive, it triggers a corresponding deallocate command to the underlying NVMe SSDs. The system supports a minimum discard range of 4KB, aligned with the logical block addressing (LBA) size, and can handle a maximum deallocate range of approximately 400 GiB per command. For larger discard operations, the filesystem and block layer handle the process seamlessly.

This feature is automatically enabled on NVMe SSDs that support the deallocate command and guarantee that deallocated blocks return zeros. For SSDs without this guarantee, the system defaults to a "write zeros" command to ensure data consistency. This flexible approach ensures broad compatibility across different SSDs while optimizing their individual capabilities.

To ensure the filesystem can take advantage of this capability and issue discard commands when files are deleted, it must be mounted with the **discard** option.

Attachments

Events for SupremeRAID™ SE

Category	Severity	Description
Physical Drive	Warning	Physical Drive <PD_ID> state has transitioned from <STATE_OLD> to unconfigured bad.
	Critical	Physical Drive <PD_ID> state has transitioned from <OLD_STATE> to failed.
	Warning	Physical Drive <PD_ID> state has transitioned from <OLD_STATE> to offline.
	Critical	Physical Drive <PD_ID> state has transitioned from <OLD_STATE> to missing.
	Info	Physical Drive <PD_ID> state has transitioned from <OLD_STATE> to online.
	Info	Physical Drive <PD_ID> state has transitioned from <OLD_STATE> to rebuild.
	Info	Physical Drive <PD_ID> state has transitioned from <OLD_STATE> to unconfigured good.
	Info	Physical Drive <PD_ID> has been successfully created.
	Info	Physical Drive <PD_ID> has been deleted.
	Info	Physical Drive <PD_ID> has been hot-plugged.
	Warning	Physical Drive <PD_ID> has been hot-removed.
	Warning	The temperature of Physical Drive <PD_ID> is currently <CURRENT_TEMP> degrees, which exceeds the Warning threshold of <THRESHOLD_TEMP> degrees. Critical Warning error code: ERROR_CODE.
	Critical	The temperature of Physical Drive <PD_ID> is currently <CURRENT_TEMP> degrees, which exceeds the Critical threshold of <THRESHOLD_TEMP> degrees. Critical Warning error code: ERROR_CODE.
	Critical	The available spare capacity <AVAIL_SPARE> of Physical Drive <PD_ID> has fallen below the threshold <SPARE_THRESHOLD>. Critical Warning error code: <ERROR_CODE>.
	Critical	The NVM subsystem reliability of Physical Drive <PD_ID> has been degraded due to significant media related errors or any internal error that degrades NVM subsystem reliability. Critical Warning error code: <ERROR_CODE>.

Drive Group	Critical	All of the media of Physical Drive <PD_ID> has been placed in read only mode. Critical Warning error code: <ERROR_CODE>.
	Critical	The volatile memory backup device of Physical Drive <PD_ID> has failed. Critical Warning error code: <ERROR_CODE>.
	Critical	The Persistent Memory Region of Physical Drive <PD_ID> has become read-only or unreliable. Critical Warning error code: <ERROR_CODE>.
	Warning	Physical Drive <PD_ID> is currently experiencing a wearout level of WEAROUT, surpassing the Warning threshold of <THRESHOLD_WEAROUT>.
	Critical	Physical Drive <PD_ID> is currently experiencing a wearout level of WEAROUT, surpassing the Critical threshold of <THRESHOLD_WEAROUT>.
	Fatal	Drive Group <DG_ID> state has transitioned from <OLD_STATE> to failed.
	Critical	Drive Group <DG_ID> state has transitioned from <OLD_STATE> to offline.
	Critical	Drive Group <DG_ID> state has transitioned from <OLD_STATE> to degraded.
	Warning	Drive Group <DG_ID> state has transitioned from <OLD_STATE> to rescue.
	Warning	Drive Group <DG_ID> state has transitioned from <OLD_STATE> to partially degraded.
	Info	Drive Group <DG_ID> state has transitioned from <OLD_STATE> to optimal.
	Info	Drive Group <DG_ID> state has transitioned from <OLD_STATE> to recovery.
	Info	Drive Group <DG_ID> state has transitioned from <OLD_STATE> to init.
	Info	Drive Group <DG_ID> state has transitioned from <OLD_STATE> to resync.
	Info	Drive Group <DG_ID> has been successfully created.
	Info	Drive Group <DG_ID> has been deleted.
	Info	Consistency Check for Drive Group <DG_ID> has been manually aborted.
	Info	Consistency Check for Drive Group <DG_ID> has been aborted due to the deletion of the Drive Group.
	Info	Consistency Check for Drive Group <DG_ID> was aborted due to the Drive Group migrating from Controller <CX_OLD> to <CX_NEW>.
	Info	Consistency Check for Drive Group <DG_ID> has been aborted due to the Drive Group's state transitioning to <DG_STATE>.

	Info	Manual Consistency Check for Drive Group <DG_ID> has been completed.
	Info	Scheduled Consistency Check for Drive Group <DG_ID> has completed.
	Info	Manual Consistency Check for Drive Group <DG_ID> has started.
	Info	Scheduled Consistency Check for Drive Group <DG_ID> has started.
	Info	Inconsistency in Drive Group <DG_ID> has been fixed at: Drive Group block range: <DG_INTERS>.
	Critical	Inconsistency detected in Drive Group <DG_ID> at: Drive Group block range: <DG_INTERS>.
	Critical	Consistency Check for Drive Group <DG_ID> has been aborted due to the 'stop_on_error' policy.
	Critical	Consistency Check for Drive Group <DG_ID> has been aborted due to numerous inconsistencies found and fixed.
	Info	Journal Replay for Drive Group <DG_ID> has started.
	Info	Journal Replay for Drive Group <DG_ID> has been completed. Entry replayed <REPLAYNR>.
	Critical	Journal Replay for Drive Group <DG_ID> has been waiting Physical Drive <PD_ID> to be active.
	Critical	Journal Replay for Drive Group <DG_ID> has been aborted due to inconsistency detected on journal.
Virtual Drive	Info	Inconsistency for Virtual Drive <VD_ID> within Drive Group <DG_ID> has been fixed at: Virtual Drive block range: <VD_OFFSETS>.
	Critical	Inconsistency found in Virtual Drive VD_ID of Drive Group <DG_ID> at: Virtual Drive block range: <VD_OFFSETS>.
	Info	Virtual Drive VD_ID for Drive Group <DG_ID> has been created successfully.
	Info	Virtual Drive VD_ID for Drive Group <DG_ID> has been deleted.
	Info	Stripe cache for Virtual Drive <VD_ID> on Drive Group <DG_ID> has been deleted.
	Info	Stripe cache for Virtual Drive <VD_ID> on Drive Group <DG_ID> has been created successfully.
Controller	Warning	The temperature of Controller <CX_ID> is currently <CURRENT_TEMP> degrees, which exceeds the GPU threshold of <THRESHOLD_TEMP> degrees.

Warning	The temperature of Controller <CX_ID> is currently <CURRENT_TEMP> degrees, which exceeds the GPU memory threshold of <THRESHOLD_TEMP> degrees.
Warning	The temperature of Controller <CX_ID> is currently <CURRENT_TEMP> degrees, it will cause controller slowdown.
Critical	The temperature of Controller <CX_ID> is currently <CURRENT_TEMP> degrees, it will cause controller shutdown.